

CYLINDERS

ISO 6432



Find out our
key products



Solution for most applications



Easy and intuitive choice



Excellent value for money



Wide availability



Fast delivery



Features and certifications

Series of cylinders conforming to ISO 6432 standards, available in bores from Ø 8 to 25, single or double acting, magnetic or non-magnetic. The heads joined to the barrel through rolling ensure perfect tightening. Supplied as standard in compliance with Reach and RoHS directives, and SIL certified. On request, they can be also supplied according to the 2014/34/EU ATEX Directive.




Type MS Ø 8 ÷ 25

from page 1.2.20



Cylinders conforming to ISO 6432 standards, available in bores from Ø 8 to 25, single acting, non magnetic, the heads joined to the barrel through rolling ensure perfect tightening. Equipped with rubber bumpers to cushion the impact of the piston. Complete with head nut and rod nut.




Type MSM Ø 8 ÷ 25

from page 1.2.20



Cylinders conforming to ISO 6432 standards, available in bores from Ø 8 to 25, single acting, magnetic, the heads joined to the barrel through rolling ensure perfect tightening. Equipped with rubber bumpers to cushion the impact of the piston. Possibility of applying one or more magnetic reed switches. Complete with head nut and rod nut.




Type MD Ø 8 ÷ 25

from page 1.2.50



Cylinders conforming to ISO 6432 standards, available in bores from Ø 8 to 25, double acting, non magnetic, the heads joined to the barrel through rolling ensure perfect tightening. Equipped with rubber bumpers to cushion the impact of the piston. Complete with head nut and rod nut.




Type MDM Ø 8 ÷ 25

from page 1.2.50



Cylinders conforming to ISO 6432 standards, available in bores from Ø 8 to 25, double acting, magnetic, the heads joined to the barrel through rolling ensure perfect tightening. Equipped with rubber bumpers to cushion the impact of the piston. Possibility of applying one or more magnetic reed switches. Complete with head nut and rod nut.




Type MDMA Ø 16 ÷ 25

from page 1.2.70



Cylinders conforming to ISO 6432 standards, available in bores from Ø 16 to 25, double acting, magnetic, the heads joined to the barrel through rolling ensure perfect tightening. Equipped with adjustable air cushioning on both ends. Possibility of applying one or more magnetic reed switches. Complete with head nut and rod nut.






Types MSM, MDM and MDMA Ø 32 ÷ 63

from page 1.10.1



Round cylinders not conforming to standards, available in bores from Ø 32 to 63, magnetic, single acting (type MSM), double acting (type MDM) or double acting with cushions (type MDMA). The heads are joined to the barrel through rolling ensure perfect tightening. Possibility of applying one or more magnetic reed switches. Complete with head nut and rod nut.



Options		
Description	Symbol	Suffix
Through rod (available from Ø 16)		P
Rear spring (available only for MS and MSM type, from Ø 16)		T
Extended rod in hardened and chrome plated steel suitable for static piston rod brake (available from Ø 20)		B
FKM seals -20°C ÷ +150°C		V
Anti-rotating hexagonal rod (available from Ø 16)		Q
ATEX versions on request		/ATEX
Special versions on request		/S

The options, when this is possible, can be combined with each other. For options matching see page 1.2.4; For code key see page 1.2.5.

Cylinders ISO 6432


Options matching

Series	Bore	Model	Standard options matching					
			P (Ø16÷25)	T (Ø16÷25)	V	B (Ø20÷25)	Q (Ø16÷25)	/ATEX
MS-MSM	Ø 8 ÷ 25	Standard	●	●	●	●	●	●
	Ø 16 ÷ 25	Through rod (P)		-	●	●	●	●
		Rear spring (T)	-		●	●	●	●
	Ø 20 ÷ 25	Piston rod brake (B)	●	●	●		-	-
	Ø 16 ÷ 25	Anti-rotating rod (Q)	●	●	●	-		●
MD-MDM	Ø 8 ÷ 25	Standard	●	-	●	●	●	●
	Ø 16 ÷ 25	Through rod (P)		-	●	●	●	●
	Ø 20 ÷ 25	Piston rod brake (B)	●	-	●		-	-
	Ø 16 ÷ 25	Anti-rotating rod (Q)	●	-	●	-		●
MDMA	Ø 16 ÷ 25	Standard	●	-	●	●	●	●
		Through rod (P)	-	-	●	●	●	●
	Ø 20 ÷ 25	Piston rod brake (B)	●	-	●	-	-	-
	Ø 16 ÷ 25	Anti-rotating rod (Q)	●	-	●	-		●

Key

● allowed matching; - not allowed matching

Standard materials

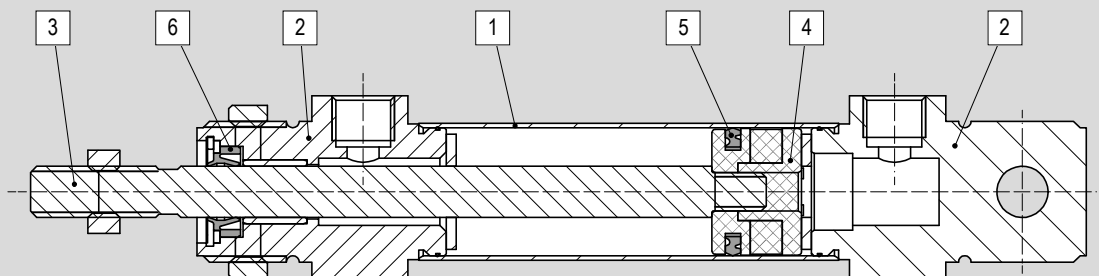

Position	Description	Materials
1	Tube	Stainless Steel AISI 316
2	Heads	Anodised aluminium
3	Rod	Stainless Steel AISI 304
4	Piston	Anodised aluminium
5	Piston seal	NBR
6	Rod seal	Polyurethane (PU)

1.2.4

Code key

Bore	/	Stroke	Type	Options			/	ATEX version	Special version
25	/	50	MDM	P	V		/		
Ø 8, 10, 12, 16, 20, 25 (MDMA type from Ø 16)				P T	V	B Q			
10 mm ÷ 1000 mm (MDMA type from 25 mm)		MS Single acting Non magnetic MSM Single acting Magnetic MD Double acting Non magnetic MDM Double acting Magnetic MDMA Double acting Magnetic With cushionings					ATEX CE Ex II 2G Ex h IIC T5 Gb II 2D Ex h IIIC T100°C Db		

How to order

Bore		Stroke	Type	Options
25	/	50	MDM	P V


Notes

Options in the same grid are alternative to each others.

For further information on options and their matching, see page 1.2.3 and page 1.2.4

For further information on the ATEX 2014/34/EU Directive, on classifications and protections, see from page III.1

Accessories

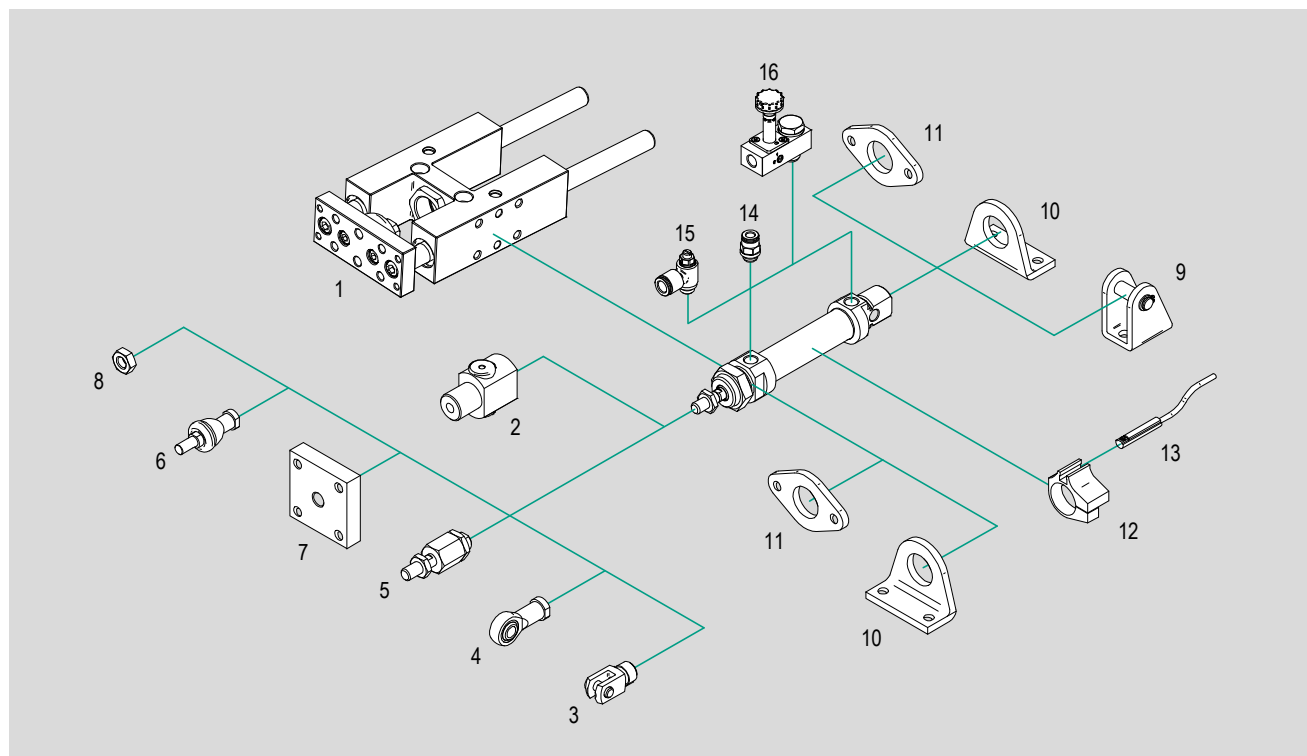

N.	Cylinder bore	Item	Description	Compliance	Matching					Code page	Data sheet page
					MS	MSM	MD	MDM	MDMA		
1	Ø 12 ÷ 25	UGLB	Slide unit U-shaped	-	•	•	•	•	•	1.2.90	1.70.1
		UGPB UGPS	Slide unit H-shaped		•	•	•	•	•		1.75.1
2	Ø 20 ÷ 25	ABS	Static piston rod brake	ISO 8140	•	•	•	•	•		1.85.10
3	Ø 8 ÷ 25	FF..	ISO female clevis with clip		•	•	•	•	•		1.85.11
		FFP..	ISO female clevis with pin and seeger		•	•	•	•	•		1.90.1
		FFN..	ISO female clevis (body only)	ISO 8139	•	•	•	•	•		1.90.10
4	Ø 8 ÷ 25	RF..SE	Bearing head (DIN 648K) with female thread		•	•	•	•	•	1.2.91	1.90.20
5	Ø 8 ÷ 25	GB..	Bearing - Self-aligning articulated coupling	-	•	•	•	•	•		1.90.30
6	Ø 12 ÷ 25	RBI..	Bearing - Axial articulated coupling		•	•	•	•	•		1.90.40
		RBL..	Bearing - Angular articulated coupling		•	•	•	•	•		1.90.70
7	Ø 25	GC..	Self-aligning coupling	-	•	•	•	•	•		1.95.1
8	Ø 8 ÷ 25	D..	Rod nut		•	•	•	•	•		1.95.2
9	Ø 8 ÷ 25	CF..	Rear clevis		•	•	•	•	•		1.120.1
10	Ø 8 ÷ 25	P..	High foot		•	•	•	•	•		1.110.10
11	Ø 8 ÷ 25	F..	Flange	2014/34/EU	•	•	•	•	•		1.113.1
12	Ø 8 ÷ 25	AFM..	Bracket for T type magnetic reed switches		-	•	-	•	•	4.2.1	
13	Ø 8 ÷ 25	ASV..	Magnetic reed switch T groove		-	•	-	•	•		
		MK..	ATEX magnetic reed switch T groove		-	•	-	•	•		
14	Ø 8 ÷ 25	R..	Push-in fittings	-	•	•	•	•	•	4.94.1	
15	Ø 8 ÷ 25	V..C	Flow controls, for cylinders		•	•	•	•	•		
16	Ø 20 ÷ 25	A1E1..MD	22mm direct mounting solenoid valves		•	•	-	-	-	1.2.90	2.10.1

Key

• matching accessory; - not matching accessory


Cylinders ISO 6432

Series MS - MSM



Main features

8 ÷ 25

**MS**

Bore Ø

Single acting
Non magnetic

Type



8 ÷ 25

**MSM**

Bore Ø

Single acting
Magnetic

Type



1 - CYLINDERS

Technical data

Bore Ø mm	8			10			12			16			20			25			
Fluid	Filtered compressed air with or without lubrication. Lubrication, if started, must be continued.																		
Pressure range	1 ÷ 10 bar																		
Temperature range	-20°C ÷ +80°C (standard)									-20°C ÷ +150°C (V)									
Strokes	10 ÷ 50 mm																		
Ports	M5												1/8"						
Rod thread	M4						M6						M8			M10x1,25			
Thrust force at 6 bar (N)	20			35			50			90			148			250			
Traction force (N)	Stroke (mm)	10	25	50	10	25	50	10	25	50	10	25	50	10	25	50	10	25	50
	min.	4,8	4	3,2	4,8	4	3,2	6,3	5,4	3,9	13,1	11,8	9,7	18,1	16,4	13,4	22,9	21,1	17,7
	max.	5,3	5,3	5,3	5,3	5,3	5,3	6,9	6,9	6,9	14	14	14	19,4	19,4	19,4	23,9	23,9	23,9

Standard strokes


Stroke mm	MS Bore Ø mm					
	8	10	12	16	20	25
10						
25						
50						

Stroke mm	MSM Bore Ø mm					
	8	10	12	16	20	25
10						
25						
50						

Key

Standard stroke



Standard dimensions

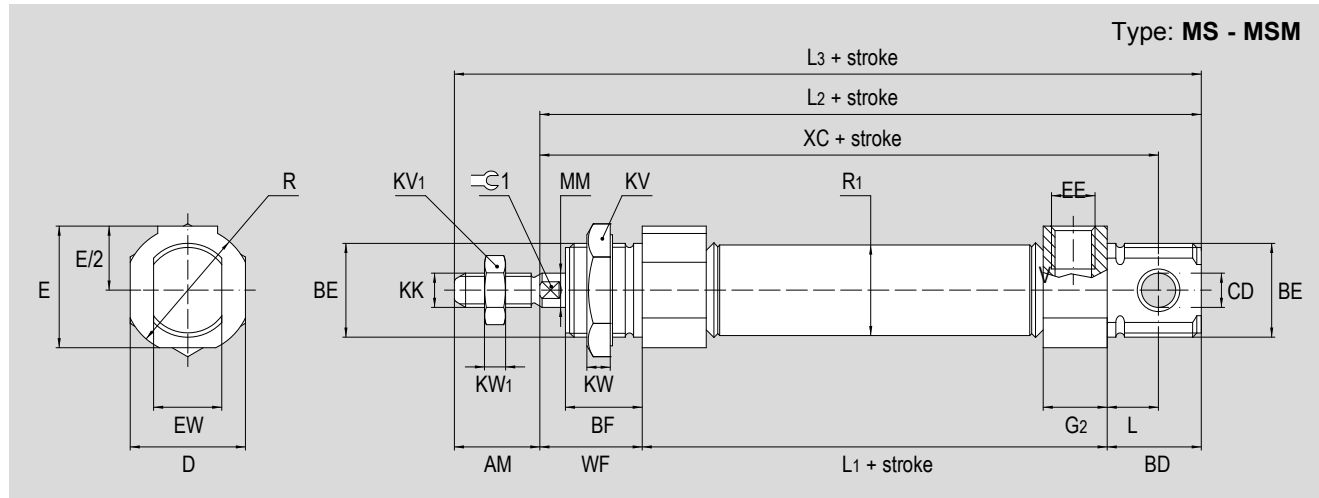

Ø (mm)	KK	MM	BE	R	EW	R ₁	E	CD	AM	XC	L ₂	L
8	M4x0,7	4	M12x1,25	16	8	9,27	15	4	12	64	74	4
10	M4x0,7	4	M12x1,25	16	8	11,27	15	4	12	64	74	4
12	M6x1	6	M16x1,5	21	12	13,27	18	6	16	75	89	2
16	M6x1	6	M16x1,5	21	12	17,27	19	6	16	82	96	2
20	M8x1,25	8	M22x1,5	30	16	21,27	28,5	8	20	95	105	12
25	M10x1,25	10	M22x1,5	30	16	26,5	28,5	8	22	104	114	12

Ø (mm)	L ₁	WF	BF	BD	EE	L ₃	D	KW	KW ₁	 1	KV ₁	KV	E/2	G ₂
8	46	16	12	12	M5	86	16	7	3	-	7	19	7,5	9
10	46	16	12	12	M5	86	16	7	3	-	7	19	7,5	9
12	51	22	16	16	M5	105	19	8	3,5	5	10	24	10	10
16	58	22	16	16	M5	112	19	8	3,5	5	12	24	10	10
20	59	24	18	22	G1/8"	125	27	6	5	7	14	27	15	15
25	64	28	20	22	G1/8"	136	27	6	6	9	17	27	15	16

Dimensions with options

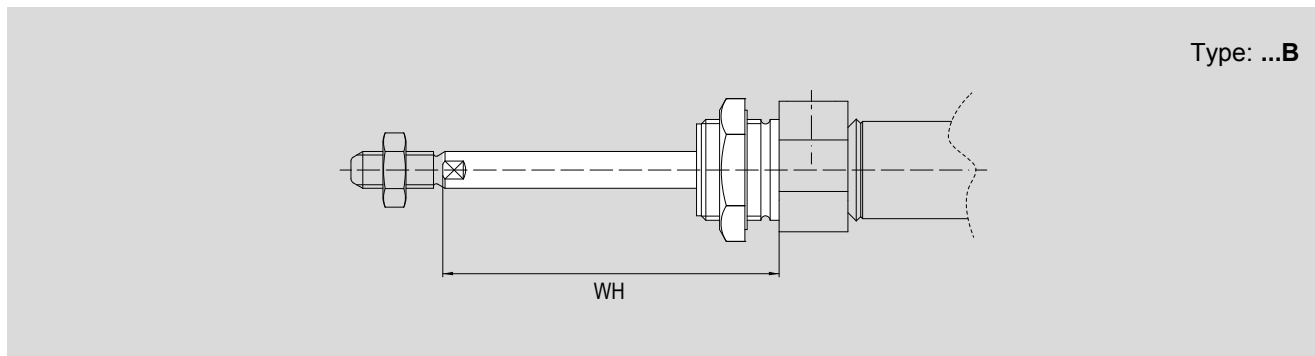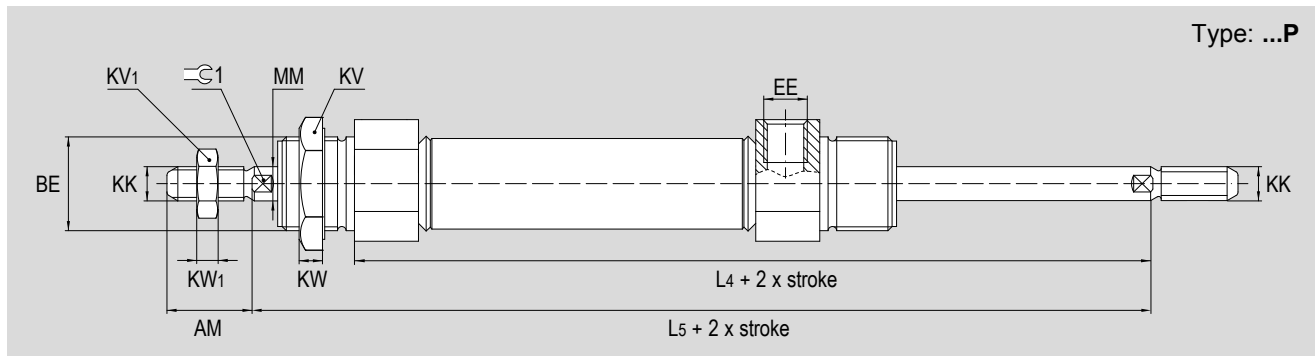

Ø mm	L ₄	L ₅	EE	BE	KK	KW	KW ₁	≡ 1	KV ₁	KV	MM	AM	WH
16	80	102	M5	M16x1,5	M6x1	8	3,5	5	12	24	6	16	-
20	83	107	G1/8"	M22x1,5	M8x1,25	6	5	7	14	27	8	20	72
25	92	120	G1/8"	M22x1,5	M10x1,25	6	6	9	17	27	10	22	74


Cylinders ISO 6432

Series MD - MDM

1 - CYLINDERS

Main features

8 ÷ 25




MD

Bores Ø

Double acting
Non magnetic

Type

8 ÷ 25



 **MDM**

Bores Ø

Double acting
Magnetic

Type



Technical data

Bore Ø mm	8	10	12	16	20	25
Fluid	Filtered compressed air with or without lubrication. Lubrication, if started, must be continued.					
Pressure range	1 ÷ 10 bar					
Temperature range	-20°C ÷ +80°C (standard)		-20°C ÷ +150°C (V)			
Strokes	10 ÷ 200 mm		10 ÷ 320 mm	10 ÷ 1000 mm		
Ports	M5				1/8"	
Rod thread	M4		M6		M8	M10x1,25

Standard strokes

Stroke mm	MD Bore Ø mm					
	8	10	12	16	20	25
10						
25						
50						
80						
100						
125						
160						
200						
250						
320						
400						
500						


Stroke mm	MDM Bore Ø mm					
	8	10	12	16	20	25
10						
25						
50						
80						
100						
125						
160						
200						
250						
320						
400						
500						

Key

 Standard stroke

1.2.50

Standard dimensions

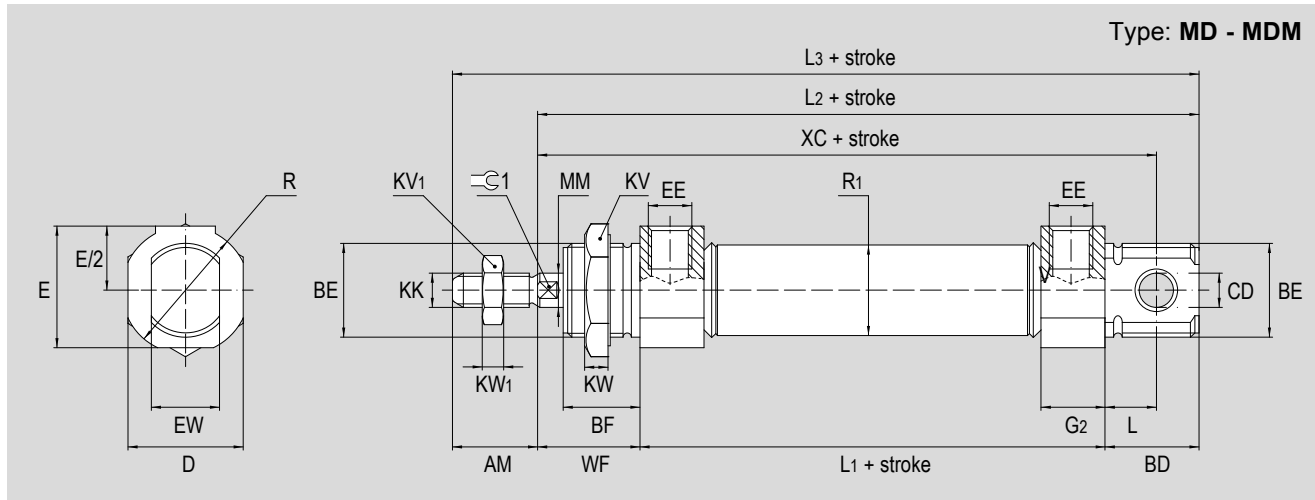

$\varnothing$ (mm)	KK	MM	BE	R	EW	R_1	E	CD	AM	XC	L_2	L
8	M4x0,7	4	M12x1,25	16	8	9,27	15	4	12	64	74	4
10	M4x0,7	4	M12x1,25	16	8	11,27	15	4	12	64	74	4
12	M6x1	6	M16x1,5	21	12	13,27	18	6	16	75	89	2
16	M6x1	6	M16x1,5	21	12	17,27	19	6	16	82	96	2
20	M8x1,25	8	M22x1,5	30	16	21,27	28,5	8	20	95	105	12
25	M10x1,25	10	M22x1,5	30	16	26,5	28,5	8	22	104	114	12

$\varnothing$ (mm)	L_1	WF	BF	BD	EE	L_3	D	KW	KW_1	$\frac{\varnothing}{1}$	KV_1	KV	E/2	G_2
8	46	16	12	12	M5	86	16	7	3	-	7	19	7,5	9
10	46	16	12	12	M5	86	16	7	3	-	7	19	7,5	9
12	51	22	16	16	M5	105	19	8	3,5	5	10	24	10	10
16	58	22	16	16	M5	112	19	8	3,5	5	12	24	10	10
20	59	24	18	22	G1/8"	125	27	6	5	7	14	27	15	15
25	64	28	20	22	G1/8"	136	27	6	6	9	17	27	15	16


Cylinders ISO 6432

Series MD - MDM


1 - CYLINDERS

Dimensions with options

Type: ...P

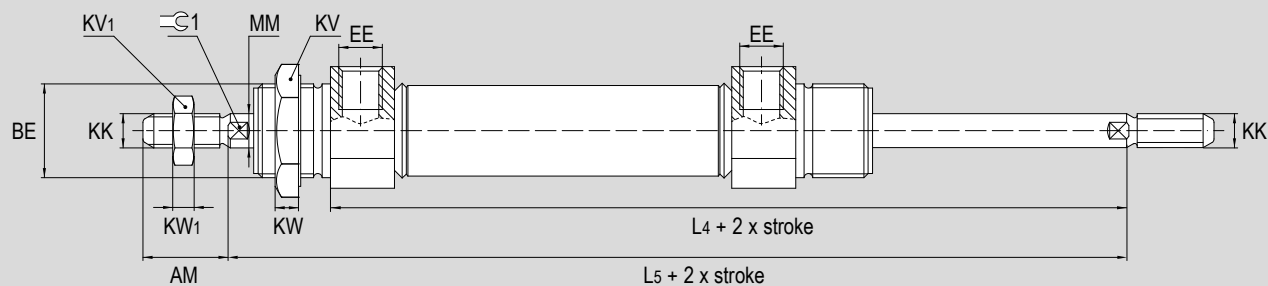

Type: ...B

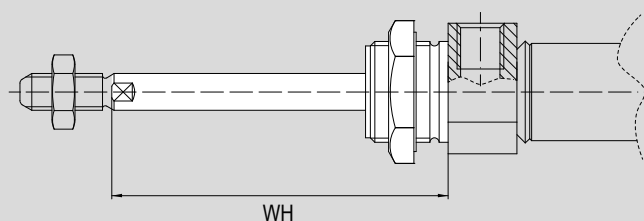

Ø mm	L ₄	L ₅	EE	BE	KK	KW	KW ₁	≡ 1	KV ₁	KV	MM	AM	WH
16	80	102	M5	M16x1,5	M6x1	8	3,5	5	12	24	6	16	-
20	83	107	G1/8"	M22x1,5	M8x1,25	6	5	7	14	27	8	20	72
25	92	120	G1/8"	M22x1,5	M10x1,25	6	6	9	17	27	10	22	74


Cylinders ISO 6432

Series MDMA



Main features

16 ÷ 25


MDMA

Bore Ø

 Double acting
Magnetic
With cushioning

Type



Technical data

Bore Ø mm	16	20	25
Fluid	Filtered compressed air with or without lubrication. Lubrication, if started, must be continued.		
Pressure range	1 ÷ 10 bar		
Temperature range	-20°C ÷ +80°C (standard) -20°C ÷ +150°C (V)		
Strokes	25 ÷ 1000 mm		
Ports	M5	1/8"	
Rod thread	M6	M8	M10x1,25

Standard strokes

Stroke mm	MDMA Bore Ø mm		
	16	20	25
25			
50			
80			
100			
125			
160			
200			
250			
320			
400			
500			

Key


Standard stroke

Cylinders ISO 6432

Series MDMA

Standard dimensions



1 - CYLINDERS

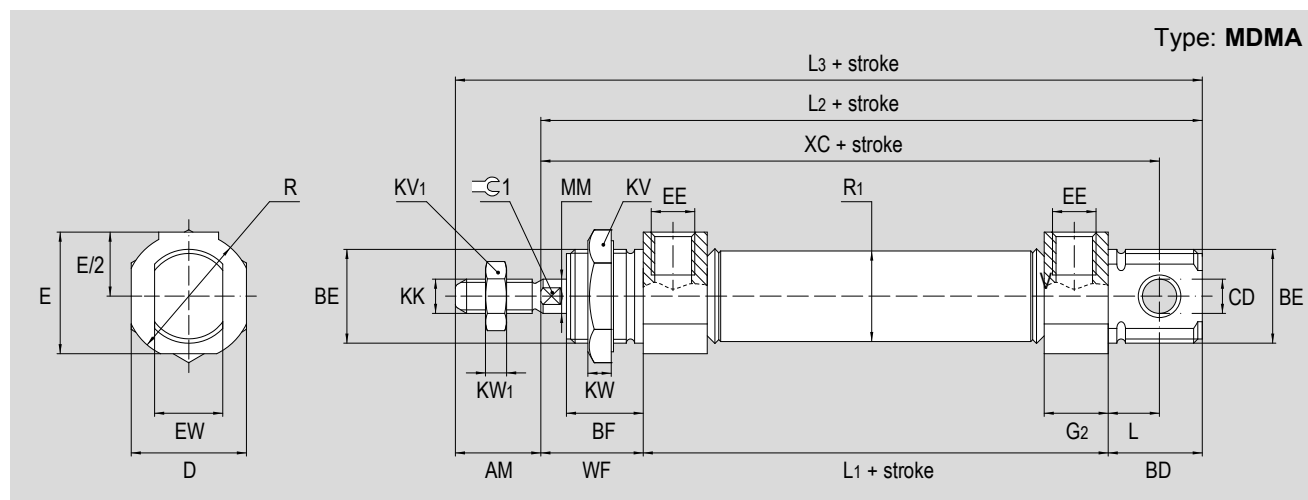

$\varnothing$ (mm)	KK	MM	BE	R	EW	R_1	E	CD	AM	XC	L_2	L
16	M6x1	6	M16x1,5	21	12	17,27	19	6	16	82	96	2
20	M8x1,25	8	M22x1,5	30	16	21,27	28,5	8	20	95	105	12
25	M10x1,25	10	M22x1,5	30	16	26,5	28,5	8	22	104	114	12

$\varnothing$ (mm)	L_1	WF	BF	BD	EE	L_3	D	KW	KW_1	$\frac{G}{1}$	KV_1	KV	$E/2$	G_2
16	58	22	16	16	M5	112	19	8	3,5	5	12	24	10	10
20	59	24	18	22	G1/8"	125	27	6	5	7	14	27	15	15
25	64	28	20	22	G1/8"	136	27	6	6	9	17	27	15	16

Dimensions with options

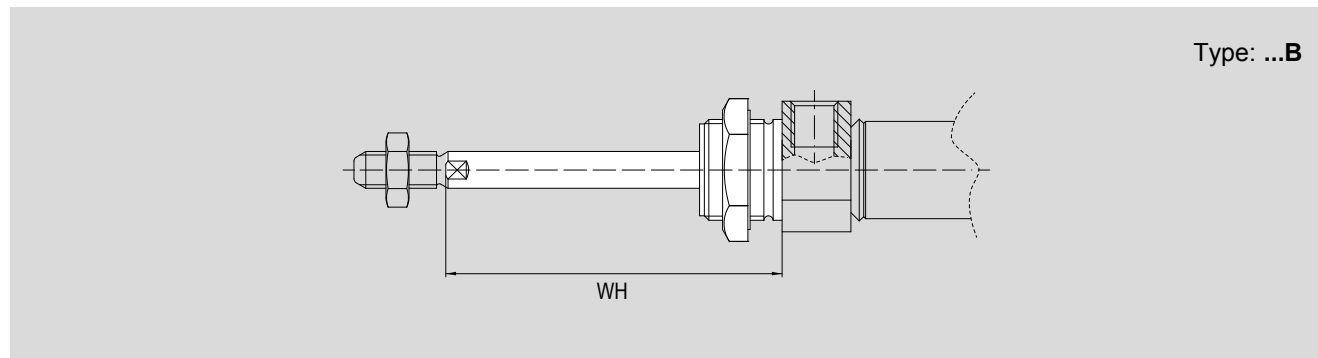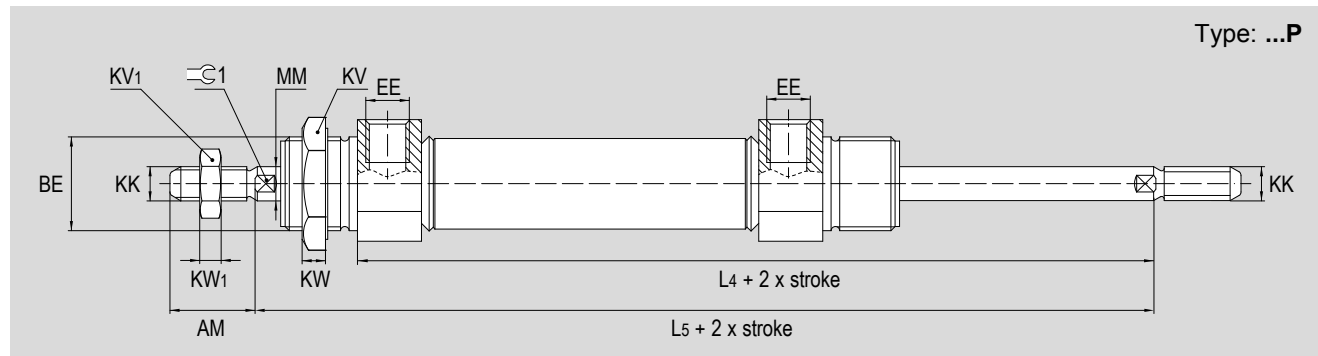

Ø mm	L ₄	L ₅	EE	BE	KK	KW	KW ₁	$\frac{1}{8}$	KV ₁	KV	MM	AM	WH
16	80	102	M5	M16x1,5	M6x1	8	3,5	5	12	24	6	16	-
20	83	107	G1/8"	M22x1,5	M8x1,25	6	5	7	14	27	8	20	72
25	92	120	G1/8"	M22x1,5	M10x1,25	6	6	9	17	27	10	22	74

Accessories for cylinders ISO 6432

Slide unit U-shaped, UGLB..

	For cylinder Ø mm	Code	Item	Compliance
	12	*	UGLB12/...	-
	16	*	UGLB16/...	
	20	*	UGLB20/...	
	25	*	UGLB25/...	

* for code see page 1.70.3

Slide unit H-shaped, UGPB..

	For cylinder Ø mm	Code	Item	Compliance
	12	*	UGPB12/...	-
	16	*	UGPB16/...	
	20	*	UGPB20/...	
	25	*	UGPB25/...	

* for code see page 1.70.3

Slide unit H-shaped, UGPS..

	For cylinder Ø mm	Code	Item	Compliance
	12	*	UGPS12/...	-
	16	*	UGPS16/...	
	20	*	UGPS20/...	
	25	*	UGPS25/...	

* for code see page 1.70.3

Static piston rod brake* normally closed ABS..CRD

	For cylinder Ø mm	Code	Item	Compliance
	20	042022	ABS020CRD	-
	25	042023	ABS025CRD	

Static piston rod brake* normally open ABS..ARD

	For cylinder Ø mm	Code	Item	Compliance
	20	042032	ABS020ARD	-
	25	042033	ABS025ARD	

* option B required

Female clevis with clip FF..ISO

	For cylinder Ø mm	Code	Item	Compliance
	8-10	041001	FF04ISO/DIN	
	12-16	041002	FF06ISO/DIN	
	20	041003	FF08ISO/DIN	
	25	041004	FF10ISO	

22mm direct mounting solenoid valves A1E1..MD

	For cylinder Ø mm	Code	Item	Cylinder matching
	20 ÷ 25	034226	A1E130MD	MS MSM

Female clevis with pin and seeger FFP..ISO

	For cylinder Ø mm	Code	Item	Compliance
	8-10	-	FFP04ISO/DIN	
	12-16	-	FFP06ISO/DIN	
	20	041049	FFP08ISO/DIN	
	25	041051	FFP10ISO	

Female clevis (body only) FFN..ISO

	For cylinder Ø mm	Code	Item	Compliance
	8-10	041091	FFN04ISO/DIN	
	12-16	041011	FFN06ISO/DIN	
	20	041018	FFN08ISO/DIN	
	25	041014	FFN10ISO	

Bearing heads (DIN 648K) with female thread RF..SE

	For cylinder Ø mm	Code	Item	Compliance
	8-10	041551	RF5SE	
	12-16	041552	RF6SE	
	20	041553	RF8SE	
	25	041554	RF10SE	

Self-aligning articulated coupling GB..

	For cylinder Ø mm	Code	Item	Compliance
	8-10	041701	GB008	-
	12-16	041702	GB010	
	20	041703	GB020	
	25	041704	GB040	

Accessories for cylinders ISO 6432

Axial articulated coupling RBI..

	For cylinder Ø mm	Code	Item	Compliance
	12-16	041602	RBI6	-
	20	041603	RBI8	
	25	041604	RBI10	

Angular articulated coupling RBL..

	For cylinder Ø mm	Code	Item	Compliance
	12-16	041652	RBL6	-
	20	041653	RBL8	
	25	041654	RBL10	

Self-aligning coupling GC..

	For cylinder Ø mm	Code	Item	Compliance
	25	041722	GCM10x1,25	-

Rod nut D..

	For cylinder Ø mm	Code	Item	Compliance
	8-10	881397	D4x0,7	
	12-16	041450	D6x1	
	20	041451	D8x1,25ZB	
	25	041452	D10x1,25ZB	

Rear clevis in steel with pin and seeger CF..+P

	For cylinder Ø mm	Code	Item	Compliance
	8-10	040048	CF08-10+P	
	12-16	040049	CF12-16+P	
	20-25	040050	CF20-25+P	

Kit composed by rear clevis, pin and two seeger.

High foot in steel P..

	For cylinder Ø mm	Code	Item	Compliance
	8-10	040021	P08-10	
	12-16	040022	P12-16	
	20-25	040023	P20-25	

Supplied individually.

Flange in steel F..

	For cylinder Ø mm	Code	Item	Compliance
	8-10	040001	F08-10	
	12-16	040002	F12-16	
	20-25	040003	F20-25	

Supplied individually.

ATEX magnetic reed switch T groove MK..

	For cylinder Ø mm	Code	Item	Compliance	Cylinder matching
	8 ÷ 25	071120	MK500A		MSM* MDM* MDMA*
		071108	MK502A		

*With bracket type AFM.. for magnetic reed switches T groove

Magnetic reed switch T groove ASV..

	For cylinder Ø mm	Code	Item	Cylinder matching
	8 ÷ 25	070946	ASV1C525	MSM* MDM* MDMA*
		071863	ASV1C550	
		071864	ASV1C51K	
		071189	ASV1C5M8	
		073639	ASV4D225	
		070246	ASV4D2M8	
		074900	ASV7N225	
		070247	ASV7N2M8	
		070372	ASV7M2M8	
		072918	ASV1H525	

*With bracket type AFM.. for magnetic reed switches T groove

Bracket for magnetic reed switch T groove AFM..

	For cylinder Ø mm	Code	Item	Compliance
	8	072901	AFM8	-
	10	072902	AFM10	
	12	072903	AFM12	
	16	072904	AFM16	
	20	072905	AFM20	
	25	072906	AFM25	