


### BLOCKWAGEN TRS-V

Verschiedene Beschichtungsvarianten auf Anfrage.

Details zu den Schienen siehe Seite 56.

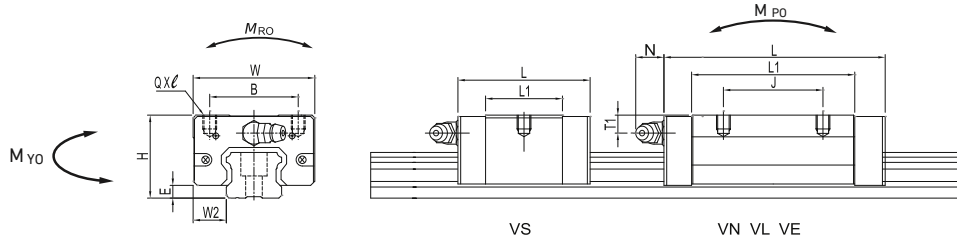

Artikel	H	W	L	B	J	W2	E	L1	QxL	T1	Schmierbohrung	N	Tragzahlen		Momente			Gewicht Wagen
													dyn. (C)	stat. (C <sub>0</sub> )	M <sub>RO</sub>	M <sub>PO</sub>	M <sub>YO</sub>	
[mm]													[N]		[Nm]			[kg]
TRS15VS	24	34	40,3	26	-	9,5	3,2	22,9	M4x5	5,5	M4x0,7	7	8904	14425	107	62	62	0,09
TRS15VN			56,9		26			39,5					11826	21633	161	145	145	0,15
TRS20VS	28	42	49,4	32	-	11	4,6	27,8	M5x6	4,5	M6x1	14	13709	20986	211	104	104	0,15
TRS20VN			68,3		32			46,7					18593	32430	327	259	259	0,23
TRS25VS	33	48	57,2	35	-	12,5	5,8	35,2	M6x6,5	4,5	M6x1	14	19054	29439	341	183	183	0,25
TRS25VN			81		35			59					25310	44159	512	425	425	0,39
TRS30VS	42	60	67,4	40	-	16	7	40,4	M8x8	8	M6x1	14	26448	38853	543	264	264	0,48
TRS30VN			96,2		40			69,3					37333	63576	889	735	735	0,77
TRS35VN	48	70	109	50	50	18	7,5	79	M8x8	8	M6x1	14	49915	81846	1399	1040	1040	1,15
TRS35VE			153		72			123					65380	120366	2058	2294	2294	1,54
TRS45VN	60	86	124,5	60	60	20,5	8,9	90,5	M10x15	10,5	PT1/8	12,5	66273	106764	2439	1549	1549	1,98

