


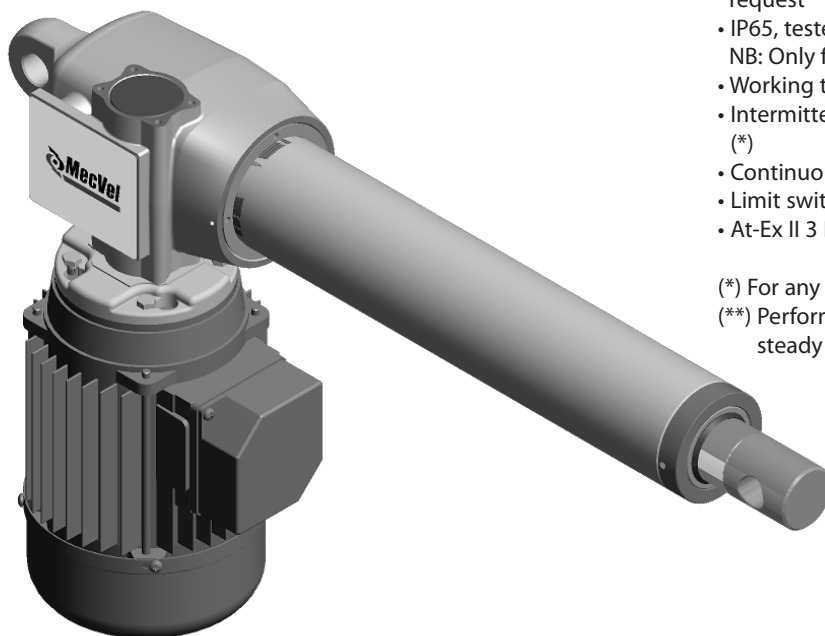

ALI5-Model C

- Three phase or single phase motor CE
- Worm gearbox (ALI5)
- Acme lead screw or ballscrew (VRS)
- Chrome plated steel push rod
- Grease (standard) or oil (VRS continuous duty S1) lubricated on request
- IP65, tested according to rule CEI EN 60529
NB: Only for brake motors Standard IP54, IP65 on request
- Working temperature range -10°C +60°C
- Intermittent duty S3 30% (5min) a +30°C acme lead screw version (*)
- Continuous duty S1 +30°C ballscrew version on request (**)
- Limit switch, potentiometer, encoder on request
- At-Ex II 3 D T4 version (A.C.motor) on request

(*) For any special duty, please contact our technical department

(**) Performance are related to ball screw, lifetime of 2000 hours with steady load and without shocks or vibrations

ALI 5 VRS (Vac 3-phase ballscrew)					
Fmax (N)	Speed (mm/s)	Version	Motor size	Motor power (KW)	Motor speed (rpm)
* 4800	93	M45	IEC71	0.55	2800
* 6000	47	M46	IEC71	0.37	2800
7500	23	M47	IEC71	0.37	2800
9500	12	M48	IEC71	0.25	1400
12000	6	M49	IEC71	0.25	1400

ALI5 (Vac 3-phase Acme lead screw)					
Fmax (N)	Speed (mm/s)	Version	Motor size	Motor power (KW)	Motor speed (rpm)
* 4300	93	M01	IEC80	1,1	2800
* 7200	47	M02	IEC80	1,1	2800
* 11000	23	M03	IEC71	0,75	2800
18000	12	M04	IEC71	0,37	2800
18000	6	M05	IEC71	0,37	1400
18000	3	M06	IEC71	0,37	1400

With single-phase motors type M (see motor choice guideline in paragraph ACCESSORIES) performances are 20% lower than the three-phase motor.

* When speed is more than 40 mm/s and/or strokes longer than 350mm, check STROKE SETUP section; BRAKEMOTOR IS RECOMMENDED

BEFORE OPERATING ACTUATOR MAKE SURE YOU READ AND UNDERSTOOD BASIC OPERATIONAL INSTRUCTIONS SHOWN ON USERMANUALS, AVAILABLE FROM WEBSITE.



THIS DOCUMENT DISPLAYS MOST TYPICAL STANDARD FEATURES AND SETUPS: CONTACT OUR OFFICES FOR MORE.


ACTUATOR SHALL NOT COME TO **MECHANICAL STROKE-END**, TO **AVOID FAILURES**.

CONSIDER MECVEL's LIMITSWITCHES (MODEL ALI5-F or ALI5-FCM) OR PUT THEM ON MACHINE/FRAME.




MecVel reserves the right to change products information and/or features without notice; all data contained in this catalogue are purely indicative and not binding for the company.

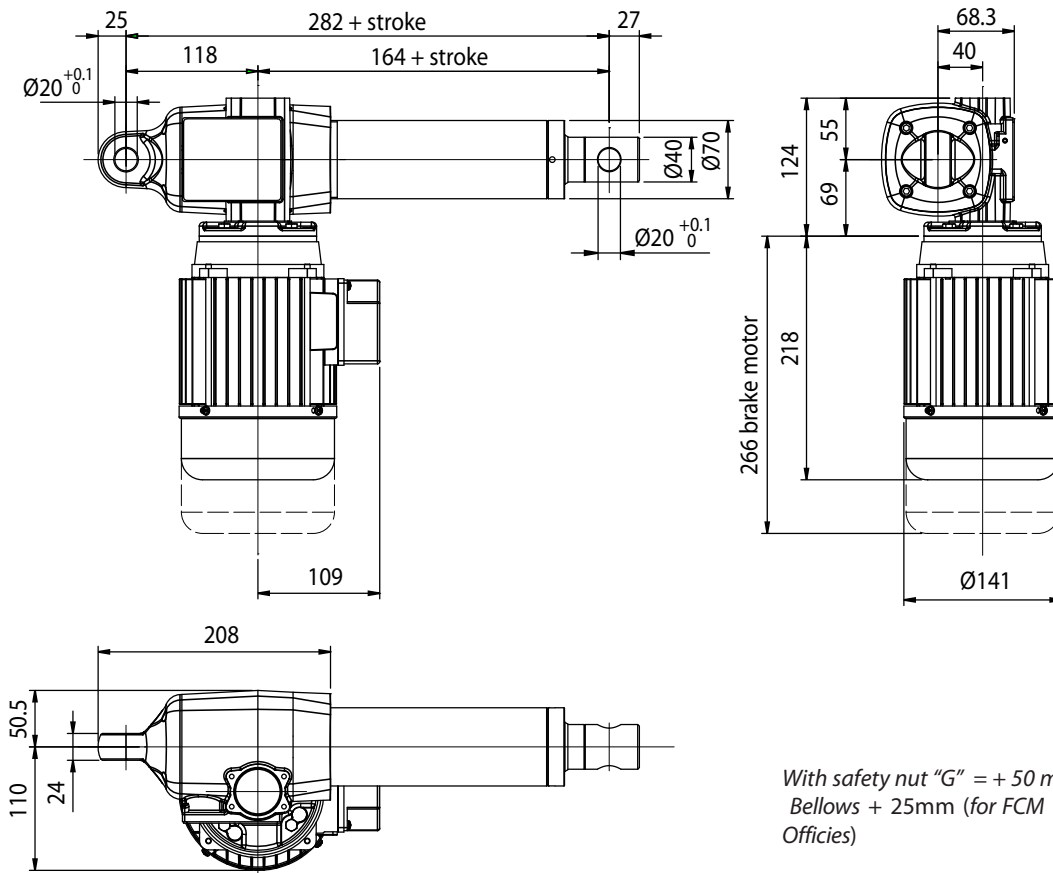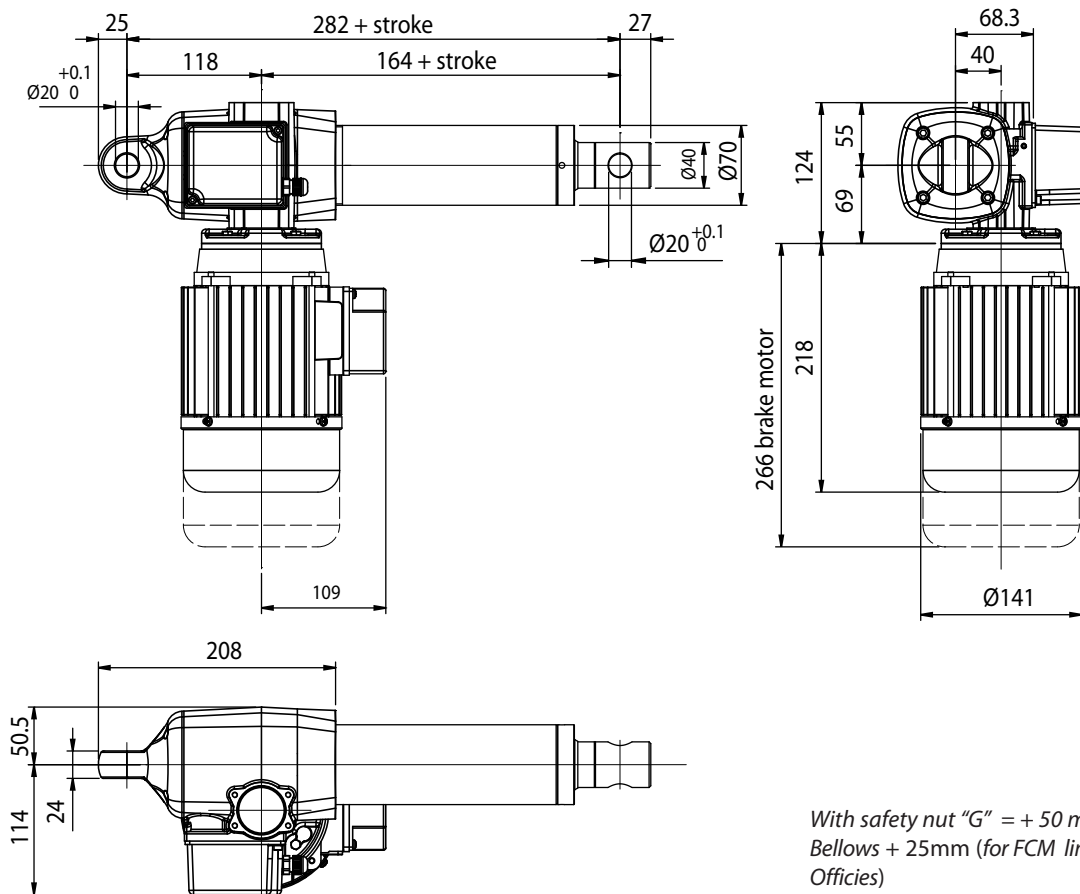ALI5 Version without limitswitches

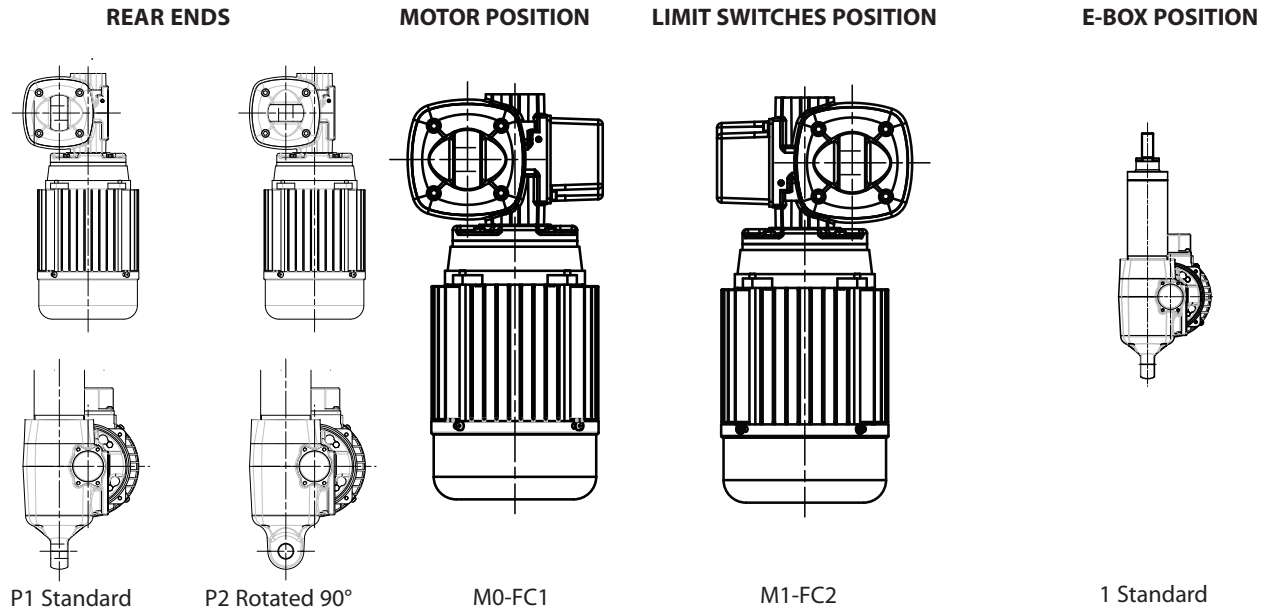ALI5-F Version with limitswitches




STROKE SETUP: Useful tips for handling stroke and avoid run-on-block collision.

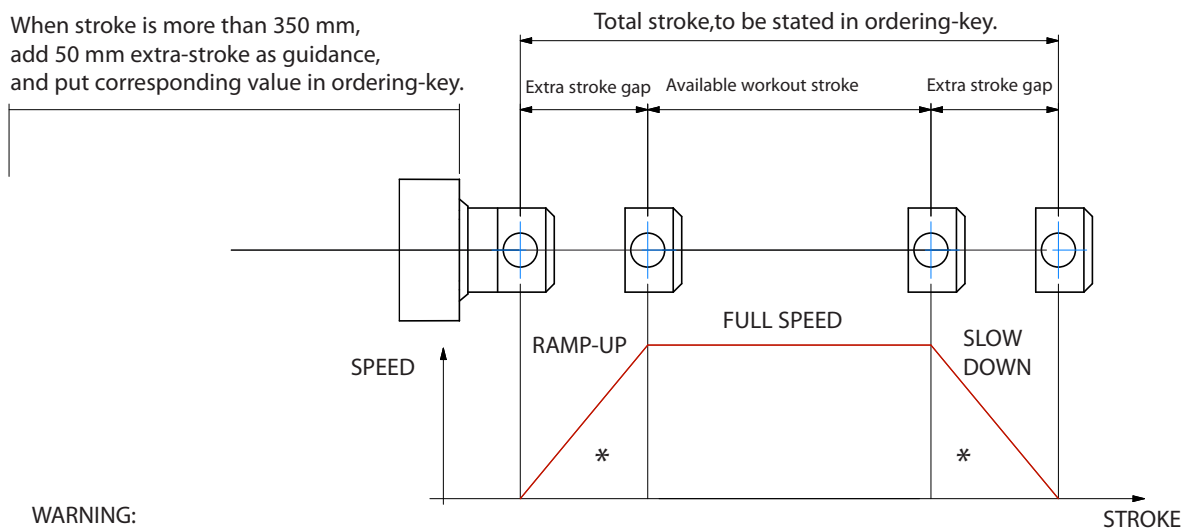When stroke is more than 350 mm, add 50 mm extra-stroke as guidance, and put corresponding value in ordering-key.




WARNING:

SPEED-TIMING ALONG STROKELENGTH:

ramps are extremely important when speed is > 40mm/s !!! Inverter or PWM drive recommended!

* The more speed raises the more extra stroke has to raise too.

BUCKLING: When stroke is longer than 500mm, BUCKLING can be a risk: please check mounting with our offices and/or see user-manuals.

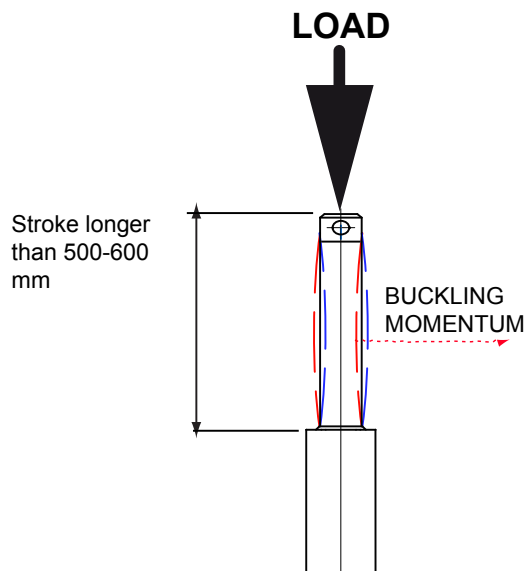

IMPORTANT:

Long strokes, even if load is low, can generate significant buckling momentums, as sketch slows.

This happens when actuator is in its all-opened position: that's the reason why we recommend 100 mm extra-stroke.

Pushtube will have this 100 mm-portion always inside the overtube, improving guidance against buckling.

For more information on this, contact our office.

ORDERING KEY
ALI5 / 0300 / M01 / CA-400-50-T-71-2-0,55 / AB / M0-FC1 / 1 / E05 / 2FC2 / POT01A / P1 / A1
MODEL:

 ALI5 / ALI5-F / ALI5-FCM / ALI5-FCI
 ALI5-VRS / ALI5-F-VRS
 ALI5-VRS-FCM / ALI5-VRS-FCI

STROKE:

es. 300 mm = 0300

VERSION: (pag.41)

Advise: choose among

Flanged Version = Rpm

Advise reduction ratio and screw pitch (ALI5)

MOTOR: (pag. ACCESSORIES)

Advise only if with motor:

version, voltage, type, size, n°pole, power

With motorflange only put 0

With special motorflange put: PD

AC MOTOR OPTIONS:

(pag. ACCESSORIES)

Motorflange: for motorflange version only advise size - i.e.for IEC71 B14 put 71B14

No motor: leave all following parameters blank

Protection Degree: IP65, for selfbrake motor IP54 standard

Brake type: for brakemotors only: ES. FECA

Options: Advise if needed (ES. AB 2'shaft)

MOTOR LIMIT SWITCHES POSITION:
M0-FC1 / M1-FC2 None: Leave blank

E-BOX POSITION:
1 No Motor: Leave blank

ENCODER: (pag. ACCESSORIES)

None: Leave blank

LIMIT SWITCHES: (pag. ACCESSORIES)

None: Leave blank

POTENTIOMETER: (pag. ACCESSORIES)

POT01A (1Kohm) **POT10A** (10Kohm) None: Leave blank

REAR END:
P1 = Eyelet


P2 = Eyelet (90°)

FRONT END:
A1 = Eyelet (Std pag. 42)

A3 = Yoke + Clip

A4 = Rod end

A7 = M20x1,5 male

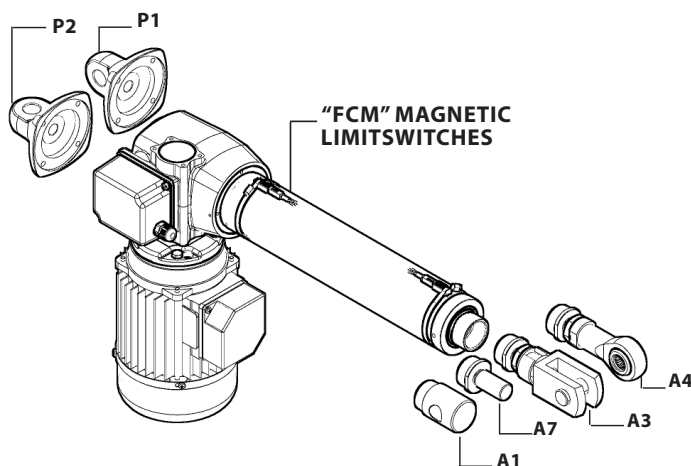NOTE: COMPLETE THE ORDERING KEY ADDING THE OPTIONS YOU CAN FIND IN THE "ACCESSORIES AND OPTIONS" SECTION

Note: "B" dimension variations depending on model

ALI5 / ALI5-F = See pictures

ALI5-FCM stroke < 500 = + 40 mm

ALI5-FCI stroke < 500 = + 30 mm

ALI5-VRS ALI5-F-VRS stroke < 500 = + 88 mm

ALI5-VRS-FCM corsa stroke < 500 = + 128 mm

ALI5-VRS-FCI stroke < 500 = + 118 mm

ALI5 / ALI5-F stroke > 500 = + 20 mm

ALI5-FCM stroke > 500 = + 60 mm

ALI5-FCI stroke > 500 = + 50 mm

ALI5-VRS ALI5-F-VRS stroke > 500 = + 108 mm


ALI5-VRS-FCM stroke > 500 = + 148 mm


ALI5-VRS-FCI stroke > 500 = + 138 mm

with safety nut "G" = + 50 mm (Es. ALI5-F opzione "G" = +50) / (i.e. ALI5-F "G" option = +50)

antirotation device "L" = + 15 mm

Bellows = + 25 (excluding FCM and FCI version, for version FCM and FCI contact MecVel)

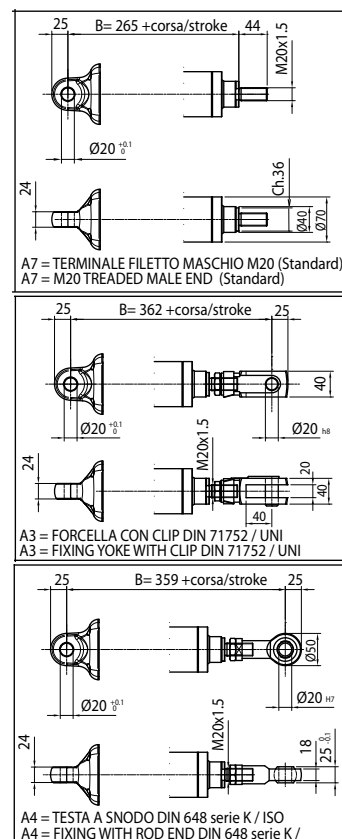

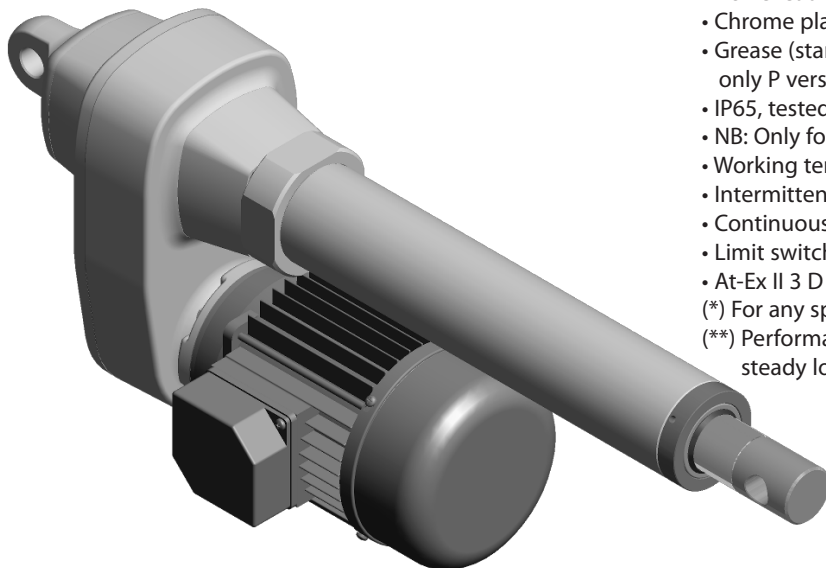

ALI5-P Cross gears

ALI5-PB Belt drive



- Three phase or single phase motor CE
 - Cross gears (ALI5-P)
 - Belt drive (ALI5-PB)
 - Acme lead screw or ballscrew (VRS)
 - Chrome plated steel push rod
 - Grease (standard) or oil (VRS continuous duty S1) lubricated only P version
 - IP65, tested according to rule CEI EN 60529
 - NB: Only for brake motors Standard IP54, IP65 on request
 - Working temperature range -10°C +60°C
 - Intermittent duty S3 30% (5min) a +30°C acme lead screw version (*)
 - Continuous duty S1 +30°C ballscrew version (**)
 - Limit switch, potentiometer, encoder on request
 - At-Ex II 3 D T4 version (A.C.motor) on request
- (*) For any special duty, please contact our technical department
 (**) Performance are related to ball screw, lifetime of 2000 hours with steady load and without shocks or vibrations

ALI5P - AC - ACME LEAD SCREW - S3 30% (5 min) 30°C					
Fmax (N)	Speed (mm/s)	Version	Motor size	Motor power (KW)	Motor speed (rpm)
* 2700	113	M11	IEC71	0.55	2800
* 4000	57	M12	IEC71	0.37	1400
6600	28	M13	IEC71	0.37	1400
15000	14	M14	IEC71	0.37	1400
15000	9	M15	IEC71	0.37	1400
15000	5	M16	IEC71	0.25	1400

ALI5P - AC - BALLSCREW - S1					
Fmax (N)	Speed (mm/s)	Version	Motor size	Motor power (KW)	Motor speed (rpm)
* 3900	113	M56	IEC71	0.55	2800
* 5500	57	M57	IEC71	0.37	1400
7000	28	M58	IEC71	0.37	1400
9000	14	M59	IEC71	0.25	1400
10000	9	M60	IEC71	0.25	1400

ALI5PB - AC - ACME LEAD SCREW - S3 30% (5 min) 30°C					
Fmax (N)	Speed (mm/s)	Version	Motor size	Motor power (KW)	Motor speed (rpm)
* 2800	233	M17	IEC80	1.10	2800
* 3300	194	M18	IEC80	1.10	2800
* 4600	117	M19	IEC80	1.10	2800
* 5500	97	M20	IEC80	1.10	2800
* 6900	58	M21	IEC80	0.75	1400
* 8300	49	M22	IEC80	0.75	1400

ALI5PB - AC - VRS - BALLSCREW - S1					
Fmax (N)	Speed (mm/s)	Version	Motor size	Motor power (KW)	Motor speed (rpm)
* 3600	223	M61	IEC80	1.10	2800
* 3800	194	M62	IEC80	1.10	2800
* 4300	117	M63	IEC80	0.75	1400
* 4500	97	M64	IEC80	0.55	1400
* 4500	49	M65	IEC71	0.25	1400

With single-phase motors type M (see motor choice guideline in paragraph ACCESSORIES) performances are 20% lower than the three-phase motor.

* When speed is more than 40 mm/s and/or strokes longer than 350mm, check STROKE SETUP section; BRAKEMOTOR IS RECOMMENDED

BEFORE OPERATING ACTUATOR MAKE SURE YOU READ AND UNDERSTOOD BASIC OPERATIONAL INSTRUCTIONS SHOWN ON USERMANUALS, AVAILABLE FROM WEBSITE.

THIS DOCUMENT DISPLAYS MOST TYPICAL STANDARD FEATURES AND SETUPS: CONTACT OUR OFFICES FOR MORE.




ACTUATOR SHALL NOT COME TO **MECHANICAL STROKE-END**, TO **AVOID FAILURES**.

CONSIDER MECVEL's LIMITSWITCHES (MODEL ALI5-P-F or ALI5-PB-F) OR PUT THEM ON MACHINE/FRAME.




MecVel reserves the right to change products information and/or features without notice; all data contained in this catalogue are purely indicative and not binding for the company.

ALI5-P-PB Version without limitswitches

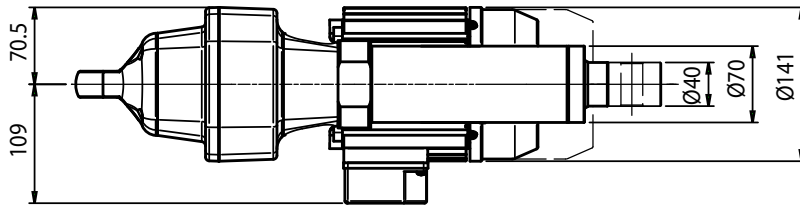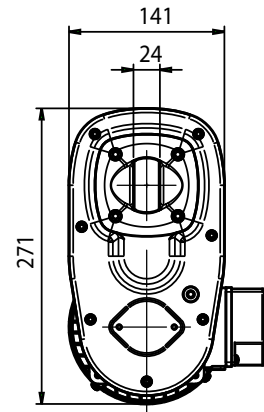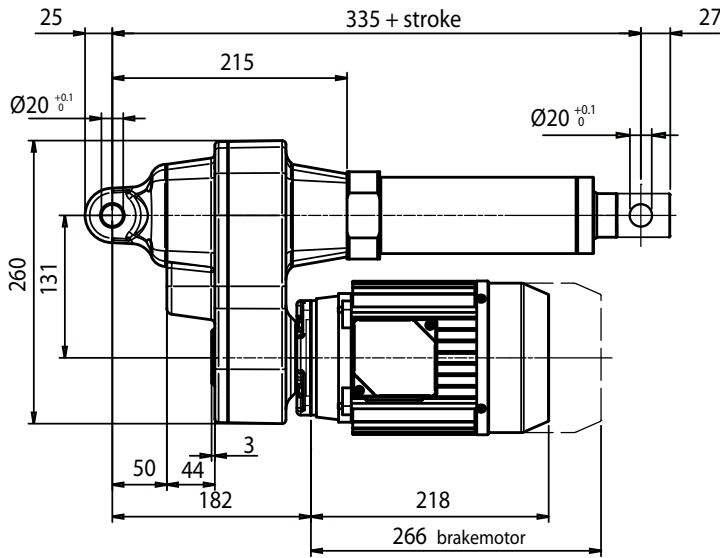

With safety nut "G" = + 50 mm
Bellows + 25mm (for FCM limitswitches contact our Offices)


REAR ENDS

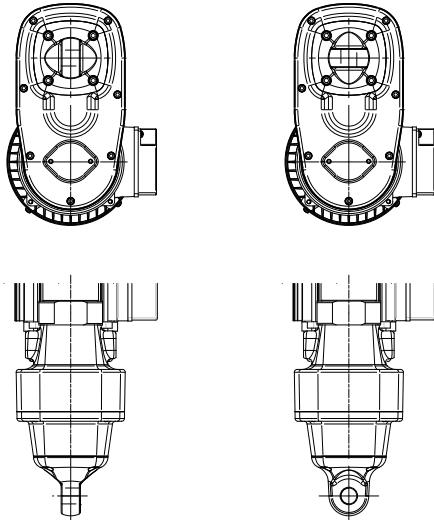

P1 Standard


P2 Ruotato 90°

E-BOX POSITION

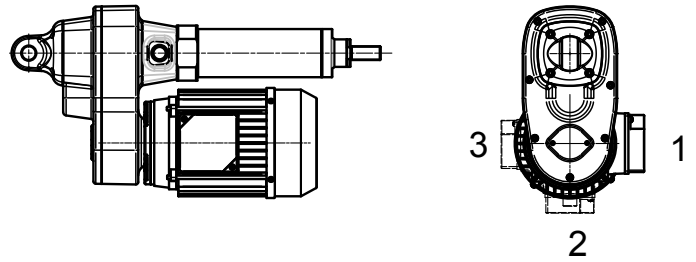

STROKE SETUP: Useful tips for handling stroke and avoid run-on-block collision.

When stroke is more than 350 mm, add 50 mm extra-stroke as guidance, and put corresponding value in ordering-key.

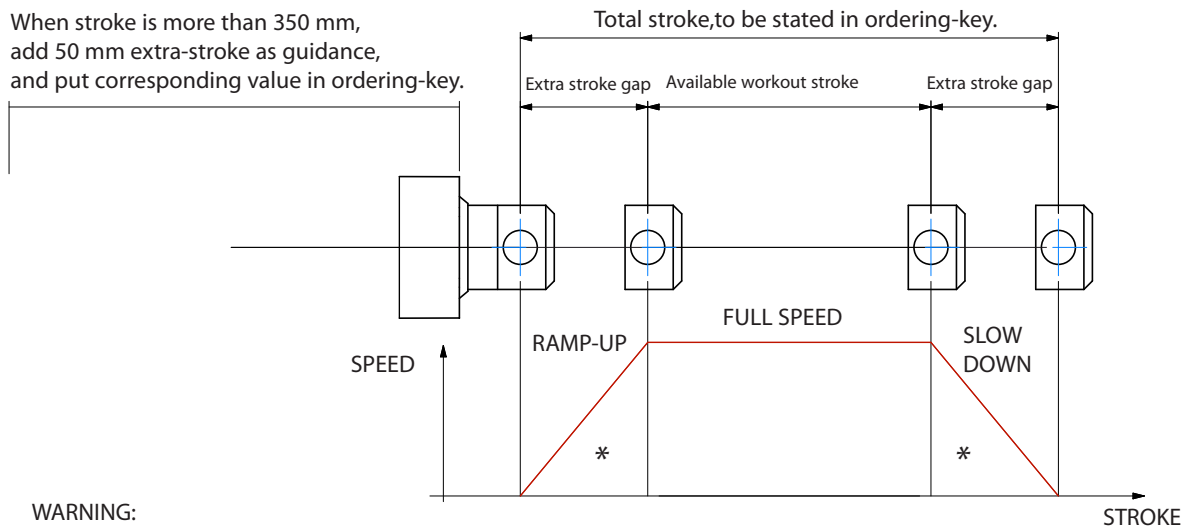


WARNING:

SPEED-TIMING ALONG STROKELENGTH:

ramps are extremely important when speed is > 40mm/s !!! Inverter or PWM drive recommended!

* The more speed raises the more extra stroke has to raise too.

BUCKLING: When stroke is longer than 500mm, BUCKLING can be a risk: please check mounting with our offices and/or see user-manuals.

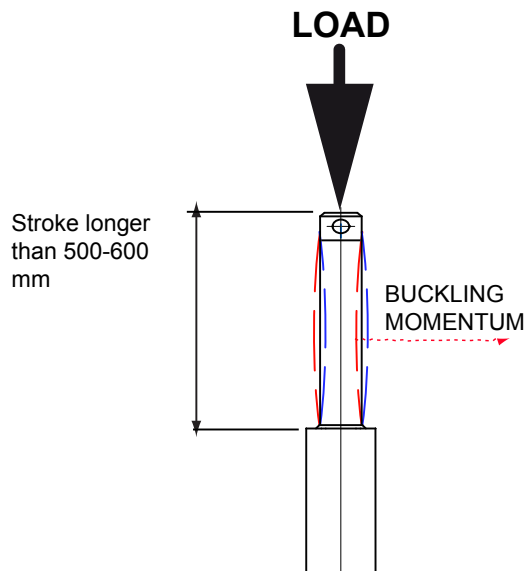

IMPORTANT:

Long strokes, even if load is low, can generate significant buckling momentums, as sketch slows.

This happens when actuator is in its all-opened position: that's the reason why we recommend 100 mm extra-stroke.

Pushtube will have this 100 mm-portion always inside the overtube, improving guidance against buckling.

For more information on this, contact our office.

ORDERING KEY
ALI5-P / 0300 / M01 / CA-400-50-T-71-2-0,55 / B5 + AB / 1 / E05 / 2FCM0 / POT01A / P1 / A1
MODEL:

 ALI5-P / ALI5-PB / ALI5-P-FCM / ALI5-P-FCI
 ALI5-P-VRS / ALI5-P-VRS
 ALI5-P-VRS-FCM / ALI5-P-VRS-FCI

STROKE:

es. 300 mm = 0300

VERSION: (pag.45)

Advise: choose among

Flanged Version = Rpm

Advise reduction ratio and screw pitch (ALI5)

MOTOR: (pag. ACCESSORIES)

Advise only if with motor:

version, voltage, type, size, n°pole, power

With motorflange only put 0

With special motorflange put: PD

AC MOTOR OPTIONS: (pag. ACCESSORIES)

Motorflange: for motorflange version only advise size - i.e.for IEC71 B14 put 71B14

No motor: leave all following parameters blank

Protection Degree: IP65, for selfbrake motor IP54 standard

Brake type: for brakemotors only: ES. FECA

Options: Advise if needed (ES. AB 2'shaft)

E-BOX POSITION:

1 No Motor: Leave blank

ENCODER: (pag. ACCESSORIES)

None: Leave blank

LIMIT SWITCHES: (psg. ACCESSORIES)

None: Leave blank

POTENTIOMETER: (psg. ACCESSORIES)

POT01A (1Kohm) **POT10A** (10Kohm) None: / Leave blank

REAR END:
P1 = Eyelet


P2 = Eyelet (90°)

FRONT END:
A1 = Eyelet (Std pag. 46)

A3 = Yoke + Clip

A4 = Rod end

A7 = M20x1,5 male

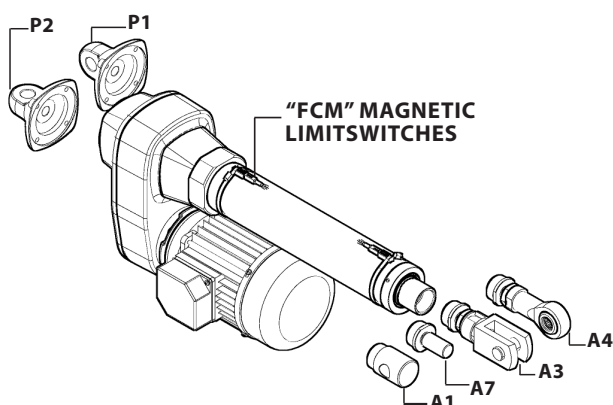NOTE: COMPLETE THE ORDERING KEY ADDING THE OPTIONS YOU CAN FIND IN THE "ACCESSORIES AND OPTIONS" SECTION

Note: "B" dimension variations depending on model

ALI5-P = See pictures

ALI5-P-FCM stroke < 500 = + 40 mm

ALI5-P-FCI stroke < 500 = + 30 mm

ALI5-P-VRS stroke < 500 = + 88 mm

ALI5-P-VRS-FCM stroke < 500 = + 128 mm

ALI5-P-VRS-FCI stroke < 500 = + 118 mm

ALI5-P stroke > 500 = + 20 mm

ALI5-P-FCM stroke > 500 = + 60 mm

ALI5-P-FCI stroke > 500 = + 50 mm

ALI5-P-VRS stroke > 500 = + 108 mm

ALI5-P-VRS-FCM stroke > 500 = + 148 mm

ALI5-P-VRS-FCI stroke > 500 = + 138 mm

with safety nut "G" = + 50 mm (i.e. ALI5-P "G" option = +50)

antirotation device "L" = + 15 mm

Bellows = + 25 mm (excluding FCM and FCI. For version FCM and FCI contact MecVel)

