

Solenoid Valve 2W, 2L, 2/2 Series

Technical data

Type	2W025-06	2W025-08	2W040-10
Port size(G)	1/8"	1/4"	3/8"
Fluid	Air, Water, Oil		
Temperature range	-5~80℃		
Operating pressure(MPa)	0~0.7		
Acting type	Direct acting		



How to Order

2W

Series
2W:2 Position 2 Way

025

Port diameter
025:25mm
040:40mm

06

Port Size
06:G1/8"
08:G1/4"
10:G3/8"



AC110V

Coil Voltage
DC12V
DC24V
AC24V 50/60Hz
AC110V 50/60Hz
AC220V 50/60Hz
AC380V 50/60Hz

Dimensions(mm):

2W025-06、08

2W040-10

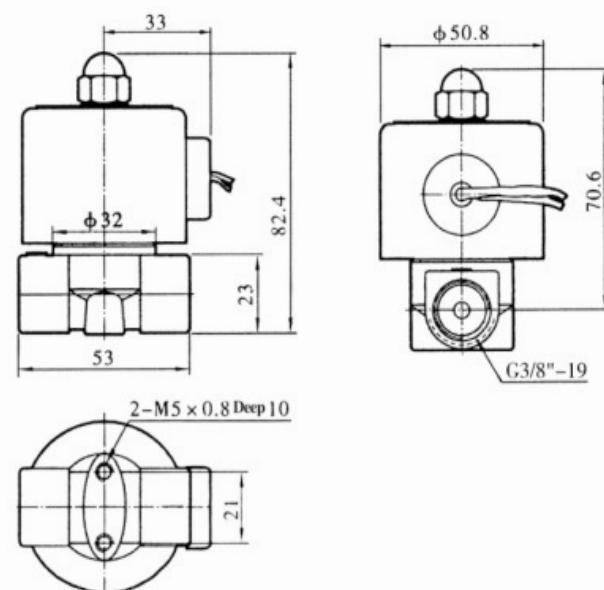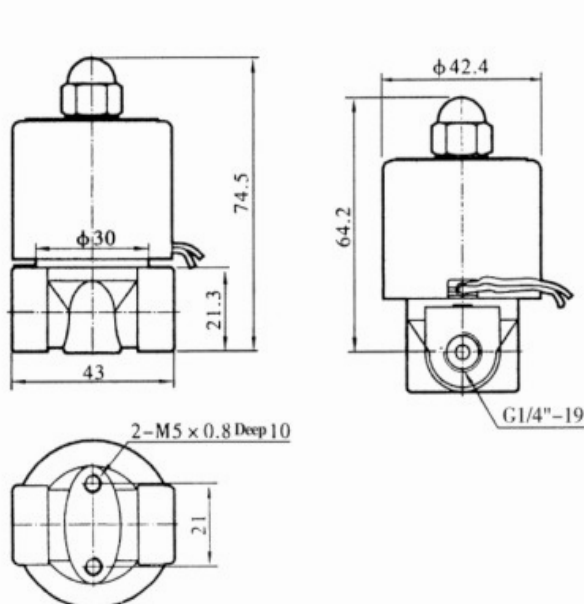

Solenoid Valve 2W, 2L, 2/2 Series

Technical data

Type	2W160-15	2W200-20	2W250-25	2W350-35	2W400-40	2W500-50
Port size(G)	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Fluid	Air Water Oil					
Temperature range	-5~80°C					
Operating pressure(MPa)	Air:0~0.7;Water:0~0.5;Oil:0~0.5					



How to order:

2W

Series
2W:2 Position 2 Way

160

Port diameter
160:16mm
200:20mm
250:25mm
350:35mm
400:40mm
500:50mm


15

Port Size
15:G1/2"
20:G3/4"
25:G1"
35:G1 1/4"
40:G1 1/2"
50:G2"

AC110V

Coil Voltage
DC12V
DC24V
AC24V 50/60HZ
AC110V 50/60HZ
AC220V 50/60HZ
AC380V 50/60HZ

Dimensions(mm):

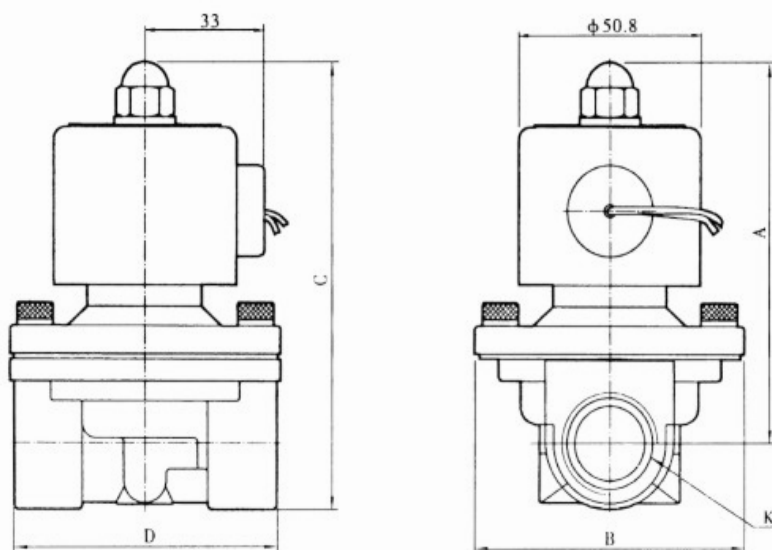

Type	A	B	C	D	K
2W160-15	93	57	106.5	69	G1/2"
2W200-20	100	57	116.4	73	G3/4"
2W250-25	105	73.4	126	99	G1"
2W350-35	142	95	172	123	G1 1/4"
2W400-40	142	95	172	123	G1 1/2"
2W500-50	172	123	209	168	G2"

Solenoid Valve

2W, 2L, 2/2 Series

Technical data

Type	2L170-10	2L170-15	2L170-20	2L200-25	2L300-35	2L300-40	2L500-50
Port size(G)	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Fluid	Air Water Vapor						
Temperature range	-5~80℃						
Operating pressure(Mpa)	1~15						



How to Order:

2L

Series
2W:2 Position 2 Way

170

Port diameter
170:20mm
200:20mm
300:30mm
500:50mm


15

Port Size
15:G1/2"
20:G3/4"
25:G1"
35:G1 1/4"
40:G1 1/2"
50:G2"

AC110V

Coil Voltage
DC12V
DC24V
AC24V 50/60Hz
AC110V 50/60Hz
AC220V 50/60Hz
AC380V 50/60Hz

Dimensions(mm):

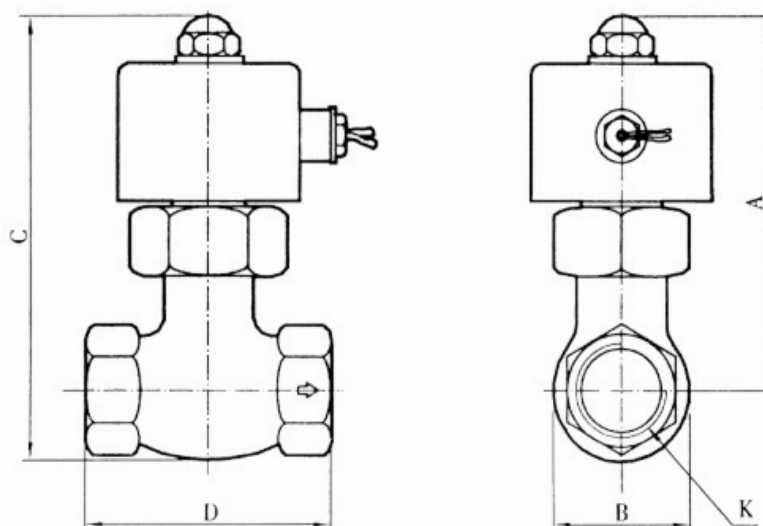

Type	A	B	C	D	K
2L170-10	125	42	146	82	G3/8"
2L170-15	125	42	146	82	G1/2"
2L170-20	125	42	146	82	G3/4"
2L200-25	136	52	162	90.5	G1"
2L300-35	148	74	185	111	G1 1/4"
2L300-40	147	74	183	111	G1 1/2"
2L500-50	175	86	223	163	G2"