


# Rotary Actuator Series CRA1

Rack Pinion Style/Size: 30, 50, 63, 80, 100



Models with cushion or with solenoid valve available.

(Only sizes  $\geq 50$  are available.)


Angle adjustment is possible.

Size 30..... Fine angle adjuster is standard equipment.

Size 50 or larger..... Angle adjustable style

Auto switch is mountable.

Adjustment of switch location is easy with rail mounting.

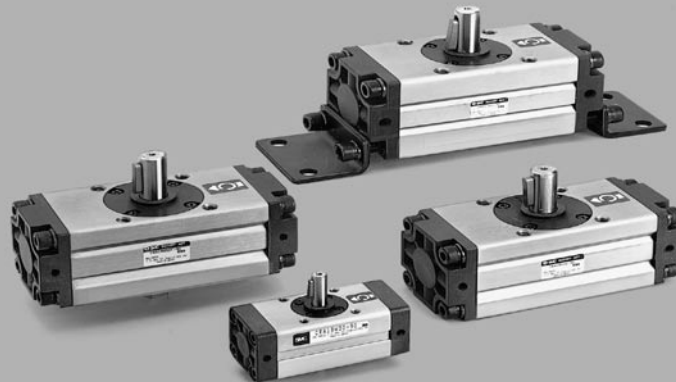

## Series Variations


Fluid		Air					Hydraulic oil				Page
Size		30	50	63	80	100	50	63	80	100	
<b>Rotation angle</b>	90°	●	●	●	●	●	●	●	●	●	4-176 to 4-196
	100°	●	●	●	●	●	●	●	●	●	
	180°	●	●	●	●	●	●	●	●	●	
	190°	●	●	●	●	●	●	●	●	●	
<b>Shaft style</b>	Single shaft	S	●	●	●	●	●	●	●	●	
	Double shaft	W	●	●	●	●	●	●	●	●	
	Single shaft with four chamfers	X	●	●	●	●	●	●	●	●	
	Double shaft key	Y	●	●	●	●	●	●	●	●	
	Double shaft with four chamfers	Z	●	●	●	●	●	●	●	●	
<b>Cushion</b>	Without air cushion	●	●	●	●	●	●	●	●	●	
	With air cushion	●	●	●	●	●	●	●	●	●	
<b>Variations</b>	With auto switch	●	●	●	●	●	●	●	●	●	
	Angle adjustable style	●	●	●	●	●	●	●	●	●	
	Clean specification	11-	●	●	●	●	●	●	●	●	
	Copper free (standard)	●	●	●	●	●	●	●	●	●	
	Built-in one-touch fittings	●	●	●	●	●	●	●	●	●	
Flange	F	●	●	●	●	●	●	●	●	●	
<b>Option</b>	<b>Mounting bracket</b>	Foot	L	●	●	●	●	●	●	●	4-197 to 4-214
<b>Made to Order</b>	<b>Material of main part</b>	Stainless steel	-X6	●	●	●	●	●	●	●	
<b>Shaft style</b>	Single shaft	S	●	●	●	●	●	●	●	●	
	Single shaft with four chamfers	X	●	●	●	●	●	●	●	●	
	Double shaft key	Y	●	●	●	●	●	●	●	●	
	Double shaft with four chamfers	Z	●	●	●	●	●	●	●	●	
	Single round shaft	T	●	●	●	●	●	●	●	●	
	Double shaft (Round, With four chamfers)	J	●	●	●	●	●	●	●	●	
Double round shaft	K	●	●	●	●	●	●	●	●		
<b>Operating temp.</b>	100°C at maximum	●	●	●	●	●	●	●	●	●	
<b>Patterns</b>	Shaft end shape	●	●	●	●	●	●	●	●	●	
	Rotation range	●	●	●	●	●	●	●	●	●	
	Port location	●	●	●	●	●	●	●	●	●	
Both sides angle adjustable		-X10	●	●	●	●	●	●	●	●	
One side angle adjustable, One side with cushion		-X11	●	●	●	●	●	●	●	●	
Fluorine rubber as seal material		-X16	●	●	●	●	●	●	●	●	

# Rotary Actuator

# Series CRA1

Rack Pinion Style/Size: 30, 50, 63, 80, 100

## How to Order

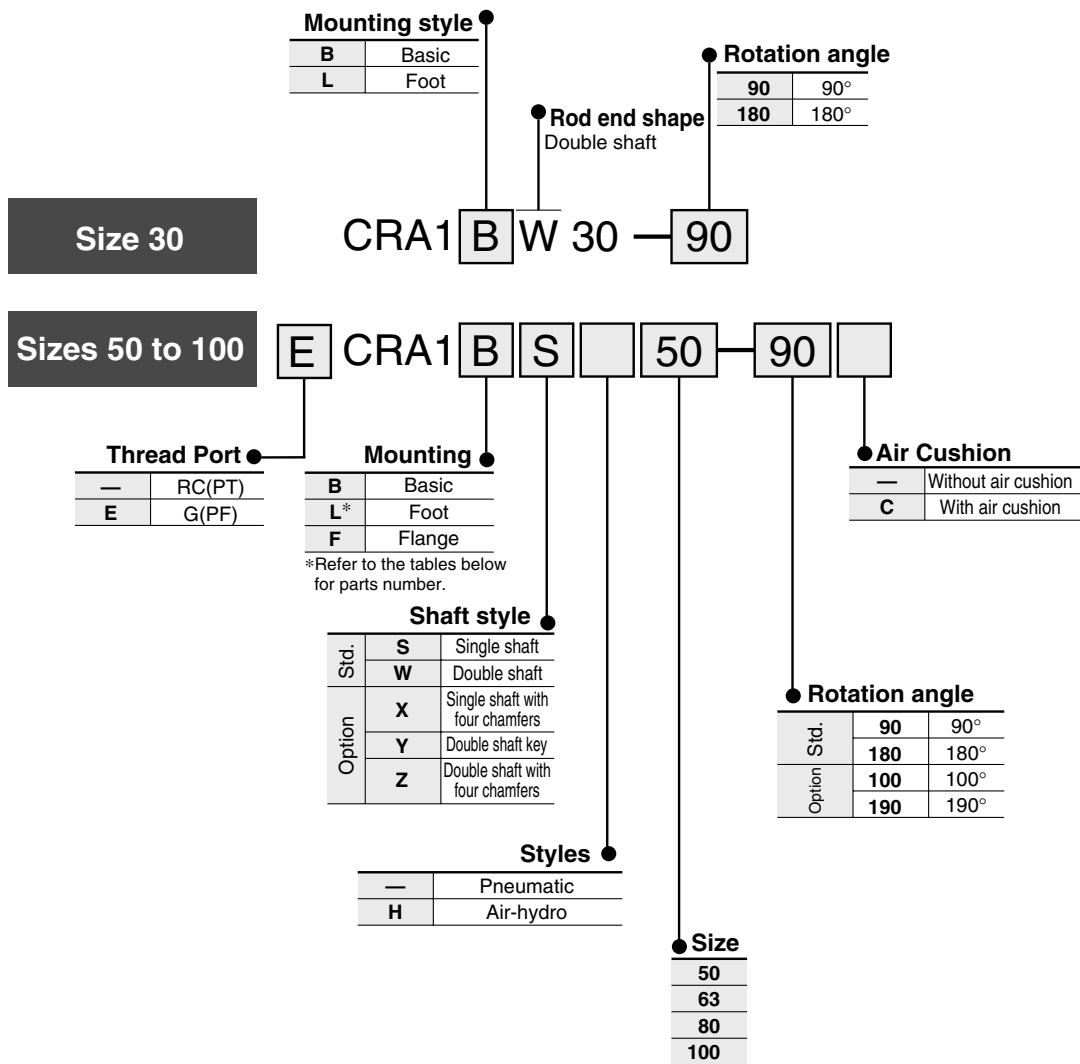

### Foot Brackets Part No.



Size	Foot bracket	Mounting screws included in foot bracket
30	CRA1L30-Y-1	M5 X 25
50	CRA1L50-Y-1	M8 X 35
63	CRA1L63-Y-1	M10 X 40
80	CRA1L80-Y-1	M12 X 50
100	CRA1L100-Y-1	M12 X 50



Notes) The part numbers shown above include mounting screw.  
As ordering foot bracket, write "1 piece" for the bracket for one rotary actuator.

**Specifications**



Style	Pneumatic					Air-hydro			
	30	50	63	80	100	50	63	80	100
Fluid	Air (Non-lube)					Hydraulic oil			
Max. operating pressure	1MPa								
Min. operating pressure	0.1MPa								
Ambient and fluid temperature	0° to 60°C (No freezing)								
Cushion	None	With or without air cushion				None			
Output <sup>(1)</sup> (Nm)	1.9	9.3	17	32	74	9.3	17	32	74
Allowable surge pressure	—					1.5MPa			
Backlash	(2)	Within 1°							
Tolerance in rotating angle	—					+4° 0			

Note 1) Output under the operating pressure of 0.5MPa.  
 Note 2) Since CRA1□30 has a stopper installed, there is no backlash produced under pressure.

**Allowable Kinetic Energy/Safe Range of Rotation Time**


Model	Allowable kinetic energy			Safe range of rotation time
	Allowable kinetic energy (J)		Cushion angle	
	Without cushion	With cushion <sup>(1)</sup>		Rotation time (s/90°)
<b>CRA1□W30</b>	0.01	—	—	0.2 to 1
<b>CRA1□□50</b>	0.05	0.98	35°	0.2 to 2
<b>CRA1□□63</b>	0.12	1.5	35°	0.2 to 3
<b>CRA1□□80</b>	0.16	2.0	35°	0.2 to 4
<b>CRA1□□100</b>	0.54	2.9	35°	0.2 to 5

Note 1) Allowable kinetic energy of the bumpers equipped model  
 The maximum absorbed energy under proper adjustment of the cushion needle.

**Weight/Standard** (kg)

Model	Standard weight		Additional weight	
	90°	180°	Foot bracket	Flange bracket
<b>CRA1BW30</b>	0.3	0.4	0.1	—
<b>CRA1BW50</b>	1.5	1.7	0.3	0.5
<b>CRA1BW63</b>	2.5	3	0.5	0.9
<b>CRA1BW80</b>	4.3	5	0.9	1.5
<b>CRA1BW100</b>	8.5	9.5	1.2	2

JIS symbol



P.4-197 to 4-214

**Weight/With Auto Switches and Solenoid Valves** (kg)

Size	Additional weight	
	With 2 auto switches	With solenoid valve*
<b>30</b>	0.1	—
<b>50</b>	0.2	0.2
<b>63</b>	0.4	0.2
<b>80</b>	0.6	0.2
<b>100</b>	0.9	0.2

\* Weight of the solenoid valve is not included. Refer to p.1.4-17 concerning weight of the solenoid valve.

# Series CRA1

## Rotary Actuator with Built-in One-touch Fittings

CRA1 **Mounting** **Shaft style** **Size** **F** — **Rotation** **Additional symbol**  
 ↓  
 With built-in one-touch fittings



Piping steps and installation space are saved.

### Specifications

Style	Pneumatic
Applicable size	<b>30, 50, 63</b>
Max. operating pressure	1MPa
Min. operating pressure	0.1MPa
Auto switch	Mountable

### Applicable Tube Specification

Size	30	50	63
Applicable tube O.D.	ø4	ø6	
Applicable tube materials	Nylon, Soft nylon, Polyurethane		

Refer to p.4-182 to 4-184 for dimensions.

## Clean Series Rotary Actuator

11—CRA1 **Mounting** **Shaft type** **Size** — **Rotation** **Additional symbol**  
 ↓  
 Clean series

Vacuum ports are equipped to prevent dust from being produced from the rod part of the rotary actuators.

### Specifications

Style	Pneumatic
Applicable size	<b>30, 50</b>
Max. operating pressure	1MPa
Min. operating pressure	0.1MPa
Auto switch	Mountable

## Copper Free Rotary Actuator

No influence on cathode ray tubes by copper ion and fluorine resin. As standard models are already made applicable to copper free styles, they can be applied as they are.


### Specifications

Style	Pneumatic
Applicable size	<b>30, 50, 63, 80, 100</b>
Max. operating pressure	1MPa
Min. operating pressure	0.1MPa
Auto switch	Mountable


**Rotation Range of Key Grooves**

If air pressure is applied from the A side of the direction indication label, the shaft rotates clockwise. If air pressure is applied from the B side, the shaft rotates counterclockwise.

**Size: 30**

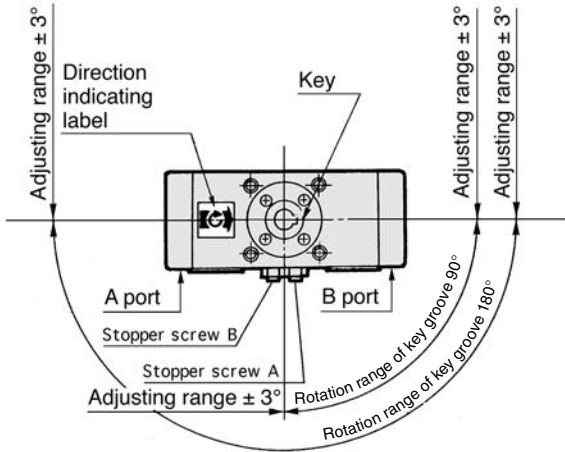

**Size: 50 to 100**

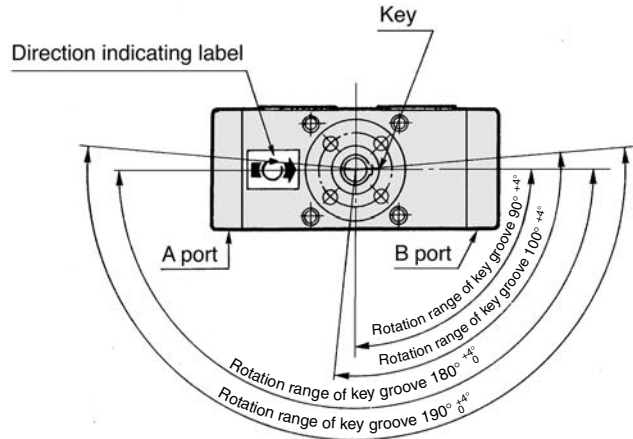

Stopper screw A: For end adjustment in clockwise direction  
 Stopper screw B: For end adjustment in counter clockwise direction.



**How to Set The Rotation Time**

Even if the torque that is generated by the rotary actuator is small, the parts could become damaged depending on the inertia of the load. Therefore, the rotation time should be determined by calculating the load's inertial moment and kinetic energy.



# Series CRA1

## Construction

Without air cushion  
Size: 30

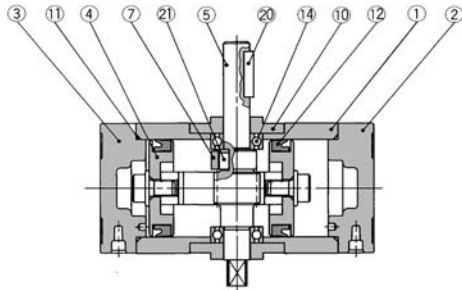

Without air cushion  
Size: 50 to 100

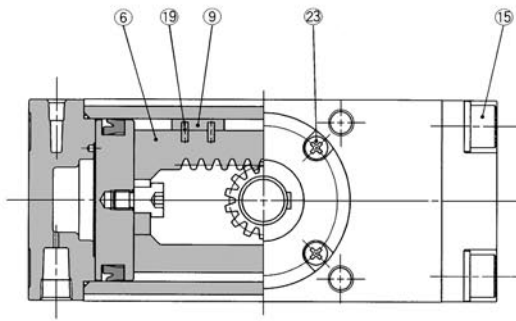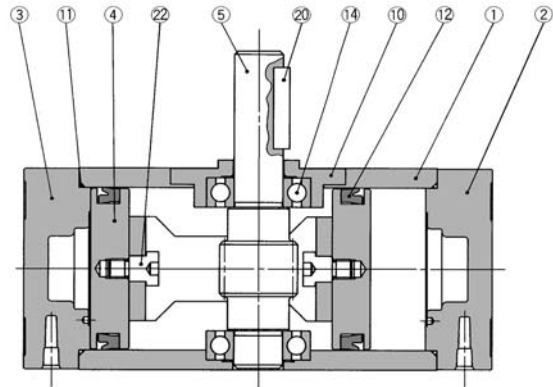

### Component Parts


No.	Description	Material	Note
①	Body	Aluminum alloy	Hard anodized
②	Cover (Right)	Aluminum alloy	Black anodized
③	Cover (Left)	Aluminum alloy	Black anodized
④	Piston	Aluminum alloy	Chromated
⑤	Shaft	Chromium-molybdenum steel	
⑥	Rack	Carbon steel	Nitrided
⑦	Stopper	Chromium-molybdenum steel	
⑧	Stopper screw	Chromium-molybdenum steel	Black dyed
⑨	Slider	Resin	
⑩	Bearing retainer	Zinc alloy <sup>(1)</sup>	Black painted
⑪	Tube gasket	NBR	

Note 1) Size 50 to 100: Aluminum alloy (Black alumite)



### Component Parts

No.	Description	Material	Note
⑫	Piston packing	NBR	
⑬	O ring	NBR	
⑭	Bearing	Carbon steel	
⑮	Hexagon socket head cap screw spring washer	Chromium-molybdenum steel	Black zinc chromated
⑯	Hexagon socket head cap flange screw	Chromium-molybdenum steel	Zinc chromated
⑰	Cross-recessed countersunk head screw	Steel wire	Black dyed
⑱	Hexagon nut	Steel wire	Black dyed
⑲	Spring pin	Steel wire	
⑳	Parallel key	Carbon steel	
㉑	Parallel key	Carbon steel	
㉒	Connecting screw	Carbon steel	Zinc chromated
㉓	Cross-recessed round head screw	Steel wire	Black zinc chromated


**With air cushion**

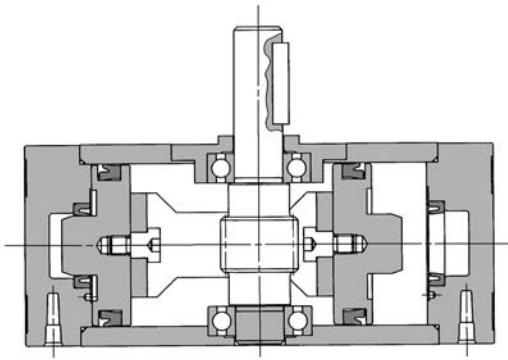

**With auto switch**  
**Size: 30**

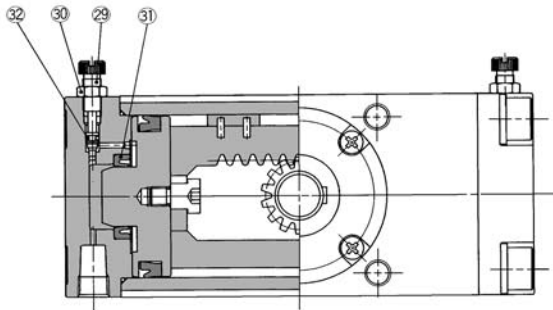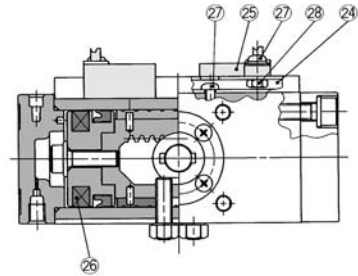

**Size: 50 to 100**

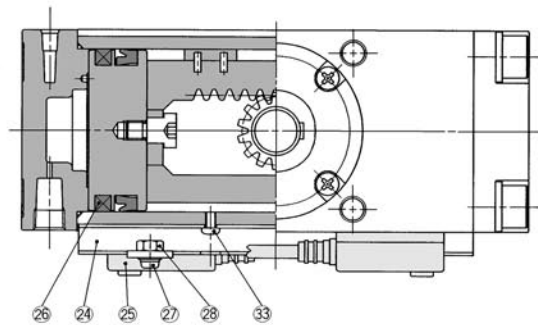

**Component Parts**

No.	Description	Material	Note
24	Auto switch mounting rail	Aluminum alloy	
25	Auto switch	—	
26	Plastic magnet	Magnetic substance	
27	Cross-recessed head cap screw	Steel wire	Nickel plated
28	Hexagon nut	Steel wire	Nickel plated
29	Needle valve	Steel wire	Nickel plated
30	Lock nut	Steel wire	Nickel plated
31	Cushion packing	NBR	
32	O ring	NBR	
33	Cross-recessed head cap screw	Steel wire	Nickel plated

**Replacement Parts** (Corresponding parts shown below are set.)

Size	Replacement parts			
	Standard	With air cushion	With auto switch	Air-hydro
<b>CRA1□W30-90</b>	P294010-20	—	P294010-20	—
<b>CRA1□W30-180</b>	P294010-21	—	P294010-21	—
<b>CRA1□□50</b>	P294020-20A	P294020-20A	P294020-20A	P294020-23A
<b>CRA1□□63</b>	P294030-20A	P294030-20A	P294030-20A	P294030-23A
<b>CRA1□□80</b>	P294040-20	P294040-20	P294040-20	P294040-23
<b>CRA1□□100</b>	P294050-20A	P294050-20A	P294050-20A	P294050-23A
Corresponding parts	⑨, ⑪, ⑫, and ⑰ are set.			




Note) When ordering spare parts, write "1 piece" for 1 set of the parts for one actuator.


# Series CRA1

## Size 30/Standard: CRA1BW, Foot Style: CRA1LW

Standard/CRA1BW30

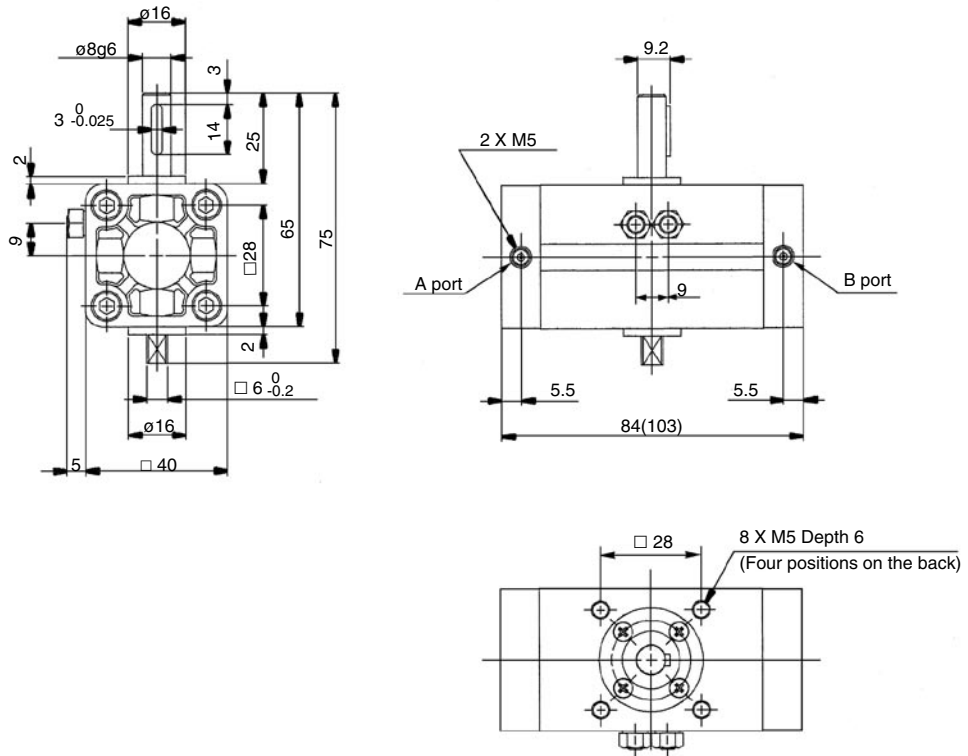

### Foot style/CRA1LW30

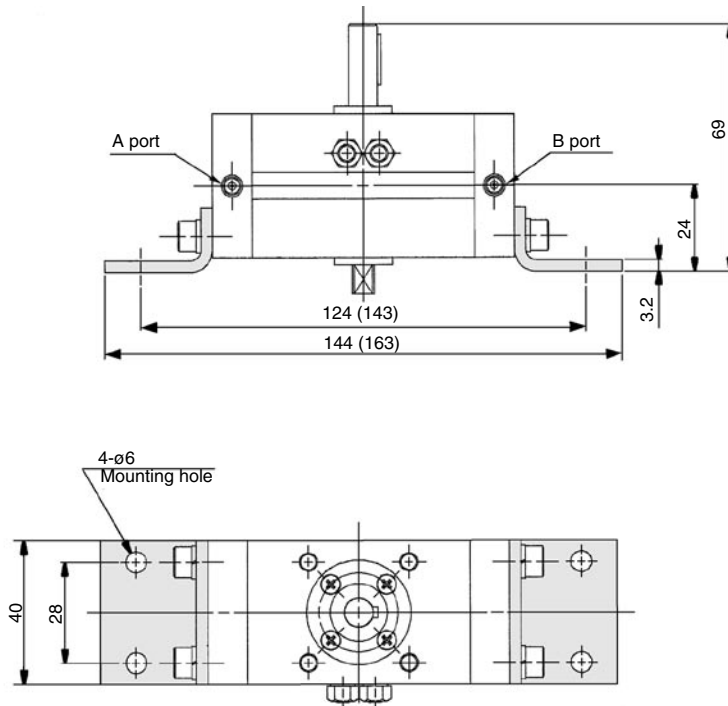


\* The dimensions above show pressurization to B port.  
 \* ( ) are the dimensions for rotation of 180°




Size **50, 63, 80, 100**/Standard: CRA1B□



Size: 50 to 100  
Single shaft style/CRA1BS  
Single shaft

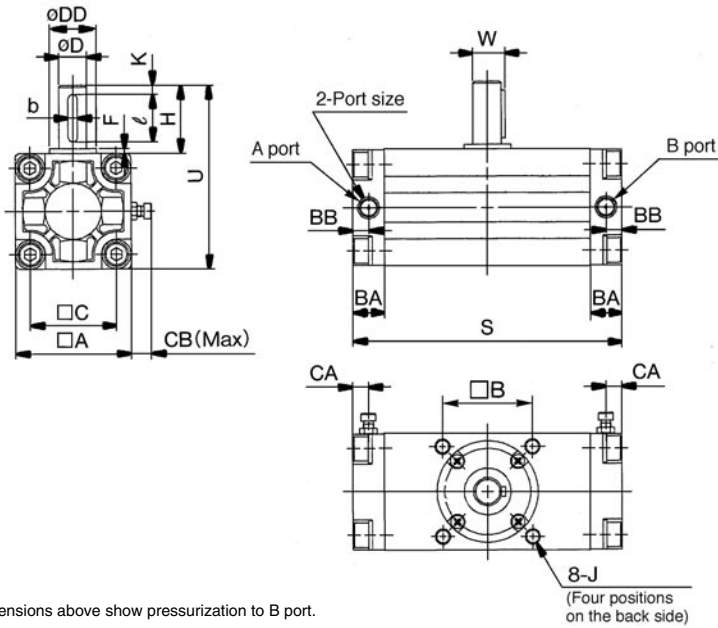

Double shaft style/CRA1BW  
Double shaft

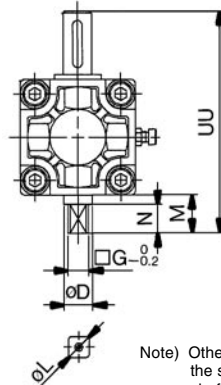


\*The dimensions above show pressurization to B port.  
\*( ) are the dimensions for rotations of 180° and 190°.

Note) Other dimensions are the same as the single shaft.

Models	Port size	A	B	C	D (g6)	DD (h9)	F	H	J	K	S	U	W	BA	BB	CA*	CB*	Key dimensions	
																		b	ℓ
CRA1BS50	1/8	62	48	46	15	25	2.5	36	M8 Depth 8	5	144 (177)	98	17	17	8.5	8.5	13	5 <sup>0</sup> <sub>0.030</sub>	25
CRA1BS63	1/8	76	60	57	17	30	2.5	41	M10 Depth 12	5	163 (201.5)	117	19.5	20	10	10	14	6 <sup>0</sup> <sub>0.030</sub>	30
CRA1BS80	1/4	92	72	70	20	35	3	50	M12 Depth 13	5	186 (230)	142	22.5	23.5	12	12	18	6 <sup>0</sup> <sub>0.030</sub>	40
CRA1BS100	3/8	112	85	85	25	40	4	60	M12 Depth 14	5	245 (311)	172	28	25	12.5	12.5	18	8 <sup>0</sup> <sub>0.036</sub>	45

Models	D (g6)	G	M	N	UU	L
CRA1BW50	15	11	20	15	118	14
CRA1BW63	17	13	22	17	139	16
CRA1BW80	20	15	25	20	167	19
CRA1BW100	25	19	30	25	202	24


Single shaft with four chamfers/CRA1BX



Note) Other dimensions are the same as the single shaft.

Models	G	H	N	U	L
CRA1BX50	11	27	15	89	14
CRA1BX63	13	29	17	105	16
CRA1BX80	15	38	20	130	19
CRA1BX100	19	44	25	156	24


Double shaft key/CRA1BY



Note) Other dimensions are the same as the single shaft.

Models	H	K	UU	ℓ
CRA1BY50	36	5	134	25
CRA1BY63	41	5	158	30
CRA1BY80	50	5	192	40
CRA1BY100	60	5	232	45

Double shaft with four chamfers/CRA1BZ

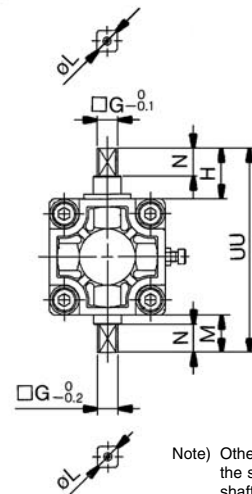


Note) Other dimensions are the same as the single shaft.

Models	G	H	M	N	UU	L
CRA1BZ50	11	27	20	15	109	14
CRA1BZ63	13	29	22	17	127	16
CRA1BZ80	15	38	25	20	155	19
CRA1BZ100	19	44	30	25	186	24


# Series CRA1

Size **50, 63, 80, 100**/Foot Style: CRA1L□, Flange Style: CRA1F□

Foot style/CRA1L□

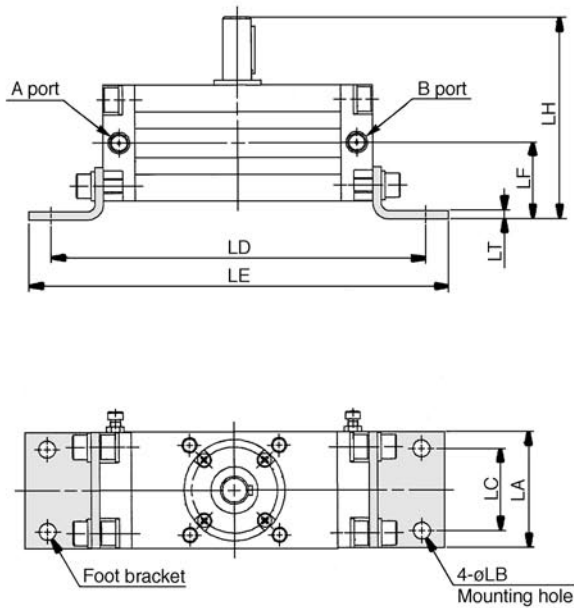

Flange style  
Single shaft/CRA1FS

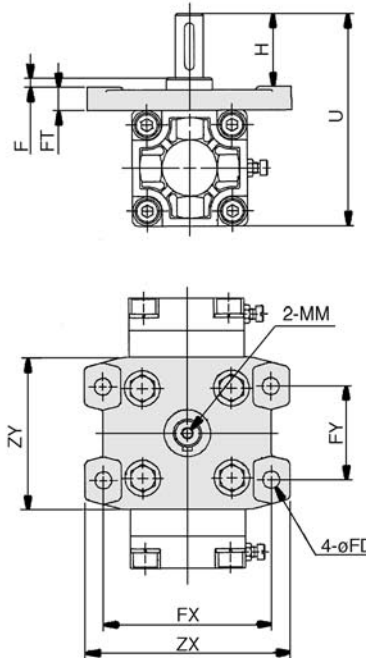


\*Dimensions above show pressurization to B port.  
\*( ) are the dimensions for rotation of 180° and 190°

Models	LA	LB	LC	LD	LE	LF	LH	LT
CRA1L□50	62	9	44	200 (233)	224 (257)	41	108	4.5
CRA1L□63	76	11	55	235 (273.5)	263 (301.5)	48	127	5
CRA1L□80	92	13	67	274 (318)	316 (360)	58	154	6
CRA1L□100	112	13	87	333 (399)	375 (441)	73.5	189.5	6

Other dimensions are the same as standard.

Models	F	H	MM	U	FD	FT	FX	FY	ZX	ZY
CRA1F□50	4	39	M6 Depth12	114	9	13	90	50	110	81
CRA1F□63	5	45	M6 Depth12	136	11.5	15	105	59	130	101
CRA1F□80	5	55	M8 Depth16	165	13.5	18	130	76	160	119
CRA1F□100	5	60	M10 Depth20	190	13.5	18	150	92	180	133


Flange style  
Double shaft/CRA1FW



Other dimensions are the same as the single shaft.

Models	H	N	U	UU
CRA1FW□50	39	15	114	134
CRA1FW□63	45	17	136	158
CRA1FW□80	55	20	165	190
CRA1FW□100	60	25	190	220


Flange style  
Single shaft with four chamfers/  
CRA1FX



Other dimensions are the same as the single shaft.

Models	H	N	U
CRA1FX□50	30	15	105
CRA1FX□63	33	17	124
CRA1FX□80	43	20	153
CRA1FX□100	44	25	174


Flange style  
Double shaft key/  
CRA1FY



Other dimensions are the same as the single shaft.

Models	H	U	UU
CRA1FY□50	39	114	150
CRA1FY□63	45	136	177
CRA1FY□80	55	165	215
CRA1FY□100	60	190	250

Flange style  
Double shaft with four chamfers/  
CRA1FZ



Other dimensions are the same as the single shaft.

Models	H	N	U	UU
CRA1FZ□50	30	15	105	125
CRA1FZ□63	33	17	124	146
CRA1FZ□80	43	20	153	178
CRA1FZ□100	44	25	174	204

# Rotary Actuator with Auto Switch

## Series CDRA1

Rack Pinion Style/Size: 30, 50, 63, 80, 100



### How to Order

**Size 30**  
CDRA1 B W30 90 A72 S

**Size 50 to 100**  
E CDRA1 B W 50 90 A53 S

**Mounting**

B	Basic
L	Foot

**Rotation angle**

90	90°
180	180°

**Thread Port**

—	Rc(PT)
E	G(PF)

**Built-in magnet**

**Mounting**

B	Basic
L*	Foot
F	Flange

Refer to p.4-176 for part numbers of foot bracket.

**Shaft styles**

Std.	S	Single shaft
	W	Double shaft
Option	X	Single shaft with four chamfers
	Y	Double shaft key
	Z	Double shaft with four chamfers

**Style**

—	Pneumatic
H	Air-hydro

**Size**

50
63
80
100

**No. of auto switches mounted**

S	1
—	2

Note) Max. no. auto switches mountable is two.

**Auto switch**  
\* Refer to the table below for part numbers of applicable auto switch.

**Cushion**

—	Without cushion
C	With cushion

**Rotation angle**

Std.	90	90°
	180	180°
Option	100	100°
	190	190°

### Auto Switch Specifications

Style	Special function	Electrical entry	Indicator	Wiring (Output)	Load voltage		Auto switch part No.			Lead wire length <sup>(1)</sup> (m)				Applicable load								
					DC	AC	Size 30		Size 50 to 100	0.5 (—)	3 (L)	5 (Z)	— (N)									
							Perpendicular	In-line								In-line						
Reed switch	—	Grommet	Yes	3 wire (Equivalent to NPN)	24V	5V	—	—	A76H	A56	●	●	—	—	IC	—						
								—	A72	A72H	—	—	—	—	—	—	—	—				
								—	12V	100V	A73	A73H	—	—	—	—	—	—	—			
								—	5V, 12V	≤ 100V	A80	A80H	—	—	—	—	—	—	—	IC		
								—	12V	—	A73C	—	—	—	—	—	—	—	—	—		
								—	12V	—	—	—	A53	—	—	—	—	—	—	—	PLC	
								—	5V, 12V	≤ 24V	A80C	—	—	—	—	—	—	—	—	—	IC	
								—	—	100V, 200V	—	—	A54	—	—	—	—	—	—	—	—	Relay PLC
								—	—	—	—	—	A67	—	—	—	—	—	—	—	—	IC
								—	—	—	—	—	100V, 200V	—	—	—	—	—	—	—	—	—
Solid state switch	—	Grommet	Yes	2 wire	24V	—	100V, 200V	—	—	J51	●	●	○	—	—	—						
								—	5V, 12V	F7NV	F79	F59	●	●	○	—	—	—	IC			
								—	12V	F7PV	F7P	F5P	●	●	○	—	—	—	—			
								—	—	F7BV	J79	J59	●	●	○	—	—	—	—			
								—	—	J79C	—	—	●	●	●	●	—	—	—	—		
								—	5V, 12V	—	F7PW	F5PW	●	●	○	—	—	—	—	—	IC	
								—	—	—	F79W	F59W	●	●	○	—	—	—	—	—	IC	
								—	—	—	J79W	J59W	●	●	○	—	—	—	—	—	—	
								—	—	—	F7BA <sup>(2)</sup>	F5BA <sup>(2)</sup>	—	●	○	—	—	—	—	—	—	
								—	5V, 12V	—	F7NT	F5NT	—	●	○	—	—	—	—	—	—	IC
—	—	—	—	F59F	●	●	○	—	—	—	—	—	—									

Note 1) Symbols for wire lengths 0.5m..... (—) Ex.) A80C 3m..... L Ex.) A80CL 5m..... Z Ex.) A80CZ — .....N Ex.) A80CN



Auto switches marked with "○" in the table are made to order specification.  
Note 2) This rotary actuator is not a improved product in water proof.  
• Consult SMC when using F7BA\* and F5BA\*.

# Series CDRA1

## Rotation Range of Key Grooves/Switch Mounting Positions


Size: 30  
CDRA1□W30

Size: 50 to 100  
CDRA1□□50 to 100

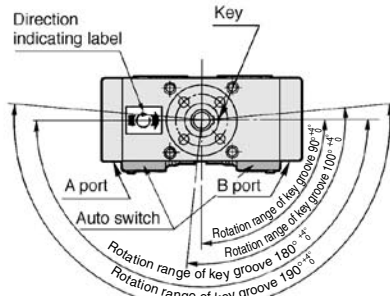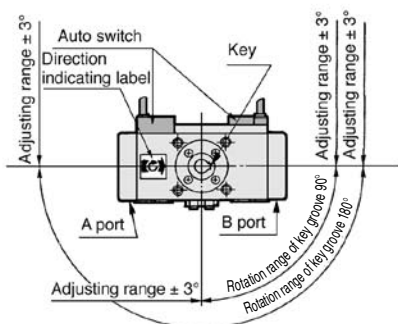

## Operation Principles




In the diagram below, switch B is ON. When pressure is applied from A, the piston moves to B, causing the shaft to rotate clockwise. At this time, magnet B goes out of the movement range of switch B, causing switch B to turn OFF. Furthermore, the piston moves to the right, causing magnet A to enter the movement range of switch A. As a result, switch A turns ON.

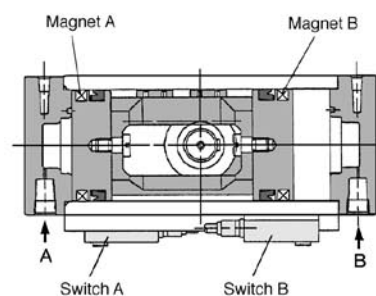

## Proper Mounting Positions for Auto Switches

CDRA1□W30

CDRA1□□50 to 100

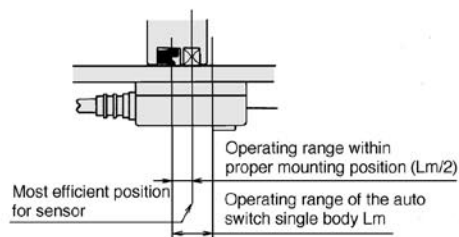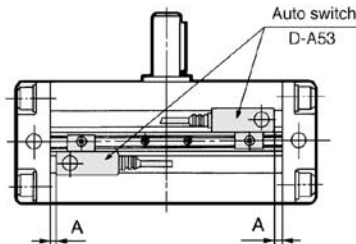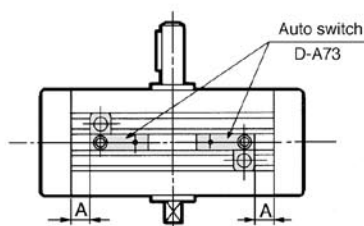

Operating angle  $\theta_m$ : Converts the operating range (Lm) of the auto switch into the rotation angle  
(1) Angle of hysteresis: The hysteresis of the auto switch is converted to degrees.

Model	A (mm)	Operating angle $\theta_m$	Angle of hysteresis <sup>(1)</sup>
CDRA1□W30-90	9 (19)	95°	20°
CDRA1□□50-90	9 (26)	65°	20°
CDRA1□□63-90	11 (30)	60°	10°
CDRA1□□80-90	15 (37)	45°	7°
CDRA1□□100-90	27 (60)	35°	5°

\* The dimensions inside "( )" are for 180°. \*\* Up to 2 auto switches can be mounted per actuator.

The dimensions in the table are the values that represent the most sensitive positions of the auto switches. Thus, they are not the dimensions that represent the mounting position at the time of shipment.

\* Consult SMC concerning the angles for the auto switches other than the models D-A73 and D-A53.

## ⚠ Caution

Be sure to read before handling.  
Refer to p. 6-15 before handling auto switches.






Sets of mounting screws for auto switch (Round head Phillips screw, Hexagon nut)

Model	Part No.
CDRA1□W30	P294010-24
CDRA1□□50 to 100	P294020-24



Note 1) The above part numbers include 2 pieces of mounting screws and 2 pieces of nuts.

Note 2) To order a set for 1 unit, the ordering quantity should be "1".

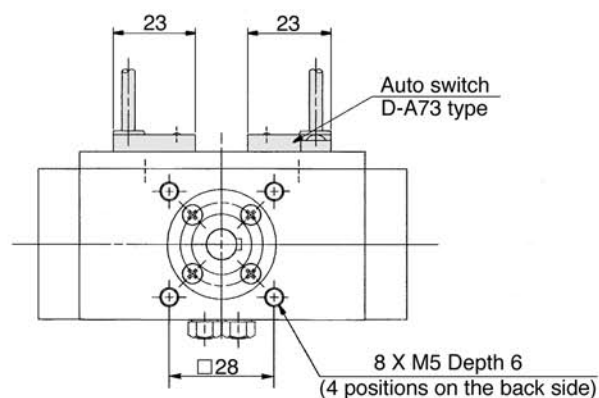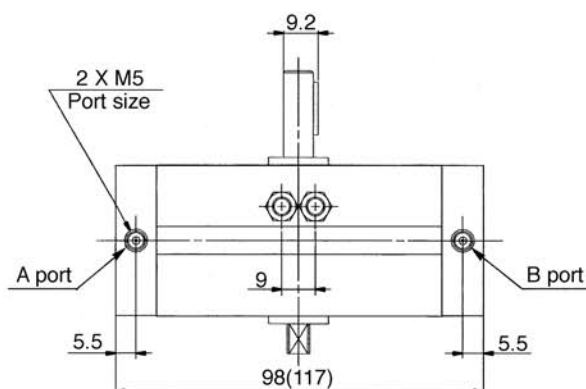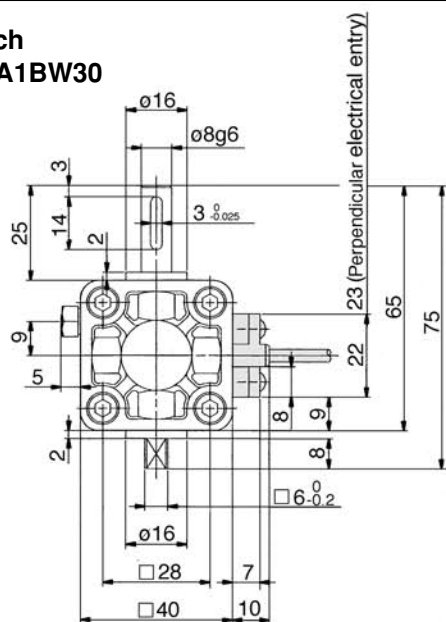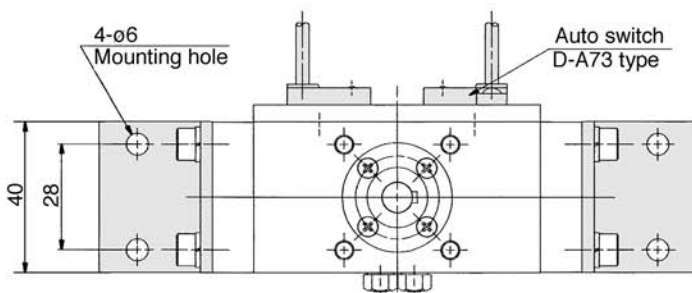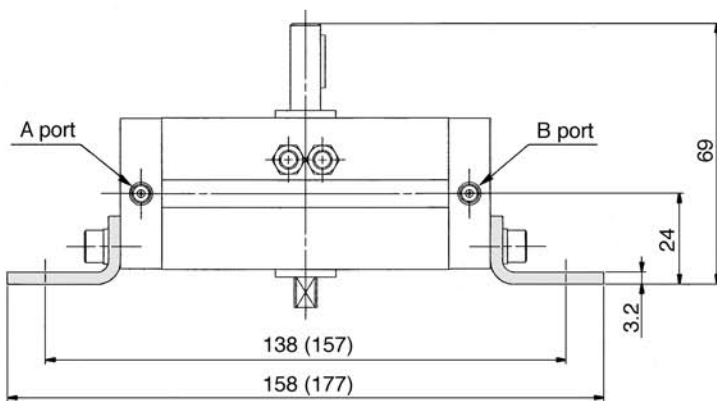**Size 30/Standard: CDRA1BW, Foot Style: CDRA1LW****With auto switch  
Standard/CDRA1BW30****Foot style/CDRA1LW30**

\* The dimensions above show pressurization to B port.





\* ( ) are the dimensions for rotation of 180°

# Series CDRA1


## Size 50, 63, 80, 100/Standard: CDRA1B□

With auto switch

Single shaft/CDRA1BS

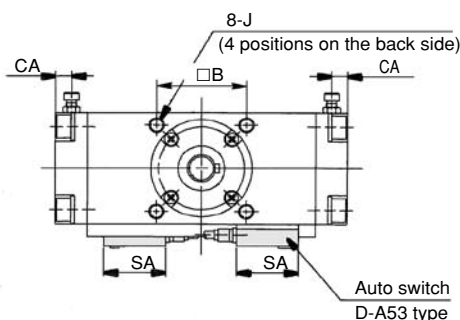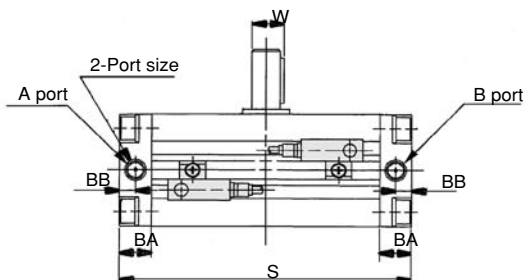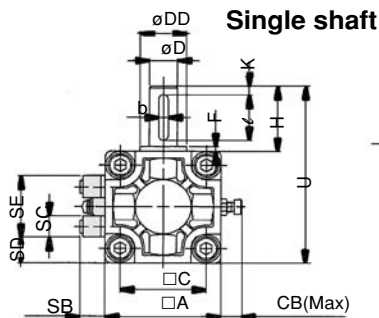

Double shaft/CDRA1BW  
Double shaft

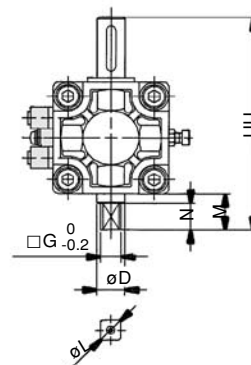

Double shaft

Model	D(g6)	G	M	N	UU	L
CDRA1BW50	15	11	20	15	118	14
CDRA1BW63	17	13	22	17	139	16
CDRA1BW80	20	15	25	20	167	19
CDRA1BW100	25	19	30	25	202	24


\*The dimensions below show pressurization to B port.

\*( ) are the dimensions for rotation of 180° and 190°.

Single shaft

Model	Port size	A	B	C	D (g6)	DD (h9)	F	H	J	K	S	U	W	BA	BB	CA	CB	SA	SB	SC	SD	SE	Key dimensions		
																							b	ℓ	
CDRA1BS50	1/8	62	48	46	15	25	2.5	36	M8 X1.25 X 8	5	156(189)	98	17	17	8.5	8.5	13	33	13.5	12	14	34	5	0.030	25
CDRA1BS63	1/8	76	60	57	17	30	2.5	41	M10 X1.5 X 12	5	175(213.5)	117	19.5	20	10	10	14	33	14.5	12	21	34	6	0.030	30
CDRA1BS80	1/4	92	72	70	20	35	3	50	M12 X 1.75 X 13	5	199(243)	142	22.5	23.5	12	12	18	33	15.5	12	29	34	6	0.030	40
CDRA1BS100	3/8	112	85	85	25	40	4	60	M12 X 1.75 X 14	5	259(325)	172	28	25	12.5	12.5	18	33	16	12	39	34	8	0.036	45


Single shaft with four chamfers/  
CDRA1BX□



Other dimensions are the same as the single shaft.

Model	G	H	N	U	L
CDRA1BX□50	11	27	15	89	14
CDRA1BX□63	13	29	17	105	16
CDRA1BX□80	15	38	20	130	19
CDRA1BX□100	19	44	25	156	24


Double shaft key/CDRA1BY□



Other dimensions are the same as the single shaft.

Model	H	K	UU	ℓ
CDRA1BY□50	36	5	134	25
CDRA1BY□63	41	5	158	30
CDRA1BY□80	50	5	192	40
CDRA1BY□100	60	5	232	45

Double shaft with four chamfers/  
CDRA1BZ□

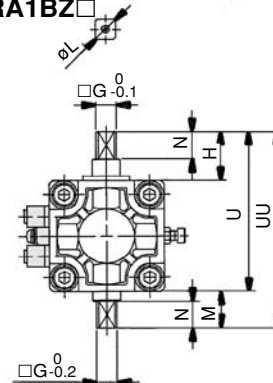


Other dimensions are the same as the single shaft.


Model	G	H	M	N	U	UU	L
CDRA1BZ□50	11	27	20	15	89	109	14
CDRA1BZ□63	13	29	22	17	105	127	16
CDRA1BZ□80	15	38	25	20	130	155	19
CDRA1BZ□100	19	44	30	25	156	186	24

**Size 50, 63, 80, 100**/Foot Style: CDRA1L, Flange Style: CDRA1F

**Foot style/CDRA1L□**

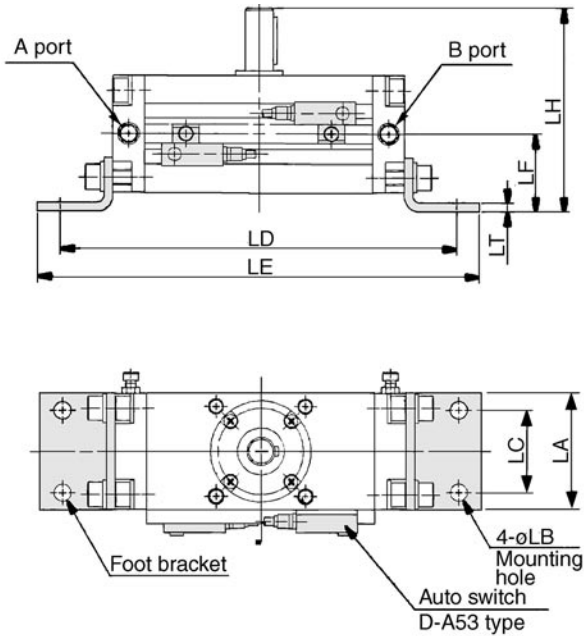

**Flange style  
Single shaft/CRA1FS**

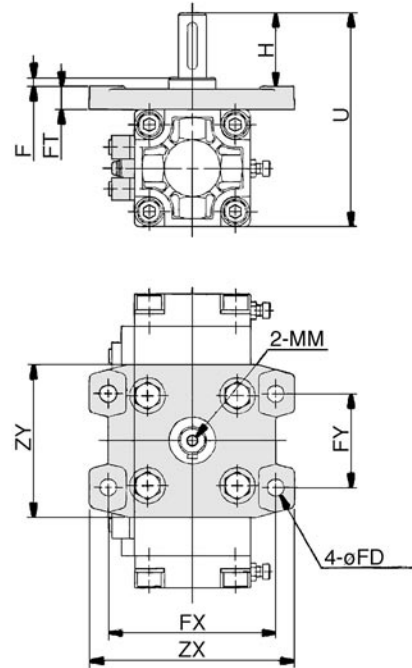

\*Dimensions above show pressurization to B port.  
\*( ) are the dimensions for rotation of 180° and 190°.

Model	LA	LB	LC	LD	LE	LF	LH	LT
<b>CDRA1L□□50</b>	62	9	44	212 (245)	236 (269)	41	108	4.5
<b>CDRA1L□□63</b>	76	11	55	247 (285.5)	275 (313.5)	48	127	5
<b>CDRA1L□□80</b>	92	13	67	287 (331)	329 (373)	58	154	6
<b>CDRA1L□□100</b>	112	13	87	347 (413)	389 (455)	73.5	189.5	6

Other dimensions are the same as standard.





Model	F	H	MM	U	FD	FT	FX	FY	ZX	ZY
<b>CDRA1F□□50</b>	4	39	M6 Depth 12	114	9	13	90	50	110	81
<b>CDRA1F□□63</b>	5	45	M6 Depth 12	136	11.5	15	105	59	130	101
<b>CDRA1F□□80</b>	5	55	M8 Depth 16	165	13.5	18	130	76	160	119
<b>CDRA1F□□100</b>	5	60	M10 Depth 20	190	13.5	18	150	92	180	133

**Flange style**

**Flange style  
Single shaft with four chamfers  
/CDRA1FX**

**Flange style  
Double shaft key  
/CDRA1FY**

**Flange style  
Double shaft with four chamfers  
/CDRA1FZ**



Other dimensions are the same as the single shaft.

Model	H	N	U	UU
<b>CDRA1FW□50</b>	39	15	114	134
<b>CDRA1FW□63</b>	45	17	136	158
<b>CDRA1FW□80</b>	55	20	165	190
<b>CDRA1FW□100</b>	60	25	190	220

Other dimensions are the same as the single shaft.

Model	H	N	U
<b>CDRA1FX□50</b>	30	15	105
<b>CDRA1FX□63</b>	33	17	124
<b>CDRA1FX□80</b>	43	20	153
<b>CDRA1FX□100</b>	44	25	174

Other dimensions are the same as the single shaft.

Model	H	U	UU
<b>CDRA1FY□50</b>	39	114	150
<b>CDRA1FY□63</b>	45	136	177
<b>CDRA1FY□80</b>	55	165	215
<b>CDRA1FY□100</b>	60	190	250

Other dimensions are the same as the single shaft.

Model	H	N	U	UU
<b>CDRA1FZ□50</b>	30	15	105	125
<b>CDRA1FZ□63</b>	33	17	124	146
<b>CDRA1FZ□80</b>	43	20	153	178
<b>CDRA1FZ□100</b>	44	25	174	204


# Angle Adjustable Style Rotary Actuator

(Angle adjusting ability for standard equipment.)

## Series CRA1□□U

Rack Pinion Style/Size: 50, 63, 80, 100

### How to Order

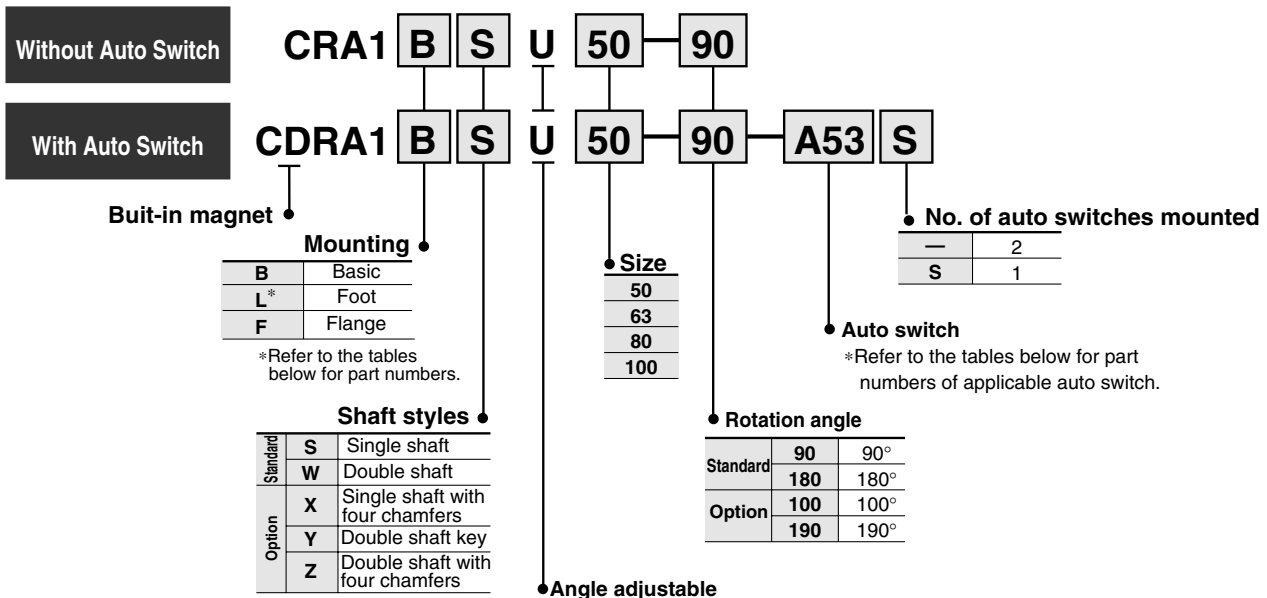

### Auto Switch Specifications

Style	Special function	Electrical entry	Indicator	Wiring (out put)	Load voltage		Auto switch part No.	Lead wire length* (m)			Applicable load			
					DC	AC		0.5 (—)	3 (L)	5 (Z)				
Reed switch	—	Grommet	Yes	3 wire (Equiv. to NPN)	24V	5V	—	<b>A56</b>	●	●	—	IC		
				2 wire		12V		<b>A53</b>	●	●	●	—	PLC	
						—		100V,200V	<b>A54</b>	●	●	●	—	Relay, PLC
						—		100V,200V	<b>A67</b>	●	●	—	IC	
						—		100V,200V	<b>A64</b>	●	●	—	IC	
				—		—		<b>A59W</b>	●	●	—	—	Relay, PLC	
Solid state switch	Diagnostic indicator (2 colour)	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	<b>F59</b>	●	●	○	IC		
				3 wire (PNP)				<b>F5P</b>	●	●	○	—		
				2 wire	24V	—	100V,200V	12V	<b>J51</b>	●	●	○	—	
								—	<b>J59</b>	●	●	○	—	
								5V, 12V	<b>F5PW</b>	●	●	○	IC	
								—	<b>F59W</b>	●	●	○	—	
				3 wire (PNP)	24V	—	—	—	<b>J59W</b>	●	●	○	—	
								—	<b>F5BA</b>	—	●	○	—	
								5V, 12V	<b>F5NT</b>	—	●	○	IC	
								—	<b>F59F</b>	●	●	○	—	
Water resistant	24V	—	—	—	<b>F59F</b>	●	●	○	IC					
				—	<b>F59F</b>	●	●	○	IC					
Timer	24V	—	—	5V, 12V	<b>F59F</b>	●	●	○	IC					
				—	<b>F59F</b>	●	●	○	IC					
Diagnostic output (2 colour)	24V	—	—	5V, 12V	<b>F59F</b>	●	●	○	IC					
				—	<b>F59F</b>	●	●	○	IC					

\*Symbols for lead wire length 0.5m..... — Ex.) A53  
 3m..... L Ex.) A53L  
 5m..... Z Ex.) 53Z

\*Auto switches without contact point marked with "○" are made to order specifications.

#### Foot Brackets/Part No.

Size	Foot bracket
<b>50</b>	P294020-25
<b>63</b>	P294030-25
<b>80</b>	P294040-25
<b>100</b>	P294050-25

The part numbers of bracket in the table above are for foot fittings including mounting screws.





**Specifications**


Fluid	Air (Non-lube)
Cushion	Without cushion
Mounting	Basic, Foot, Flange style
Angle adjustable range	0° to 90°
Backlash	Within 1°

**Weight**


Model	Standard weight		Additional weight
	90°	180°	
<b>CRA1 □□U 50</b>	1.5	1.7	0.5
<b>CRA1 □□U 63</b>	2.5	3.0	0.8
<b>CRA1 □□U 80</b>	4.3	5.0	1.5
<b>CRA1 □□U 100</b>	8.5	9.5	2.0

**Rotation Range of Key Groove**

Adjusting direction is in the direction the arrows show.  
 Adjusting angle at 90° at maximum.  
 90° Type: 90° to 0°, 180° type: 180° to 90°

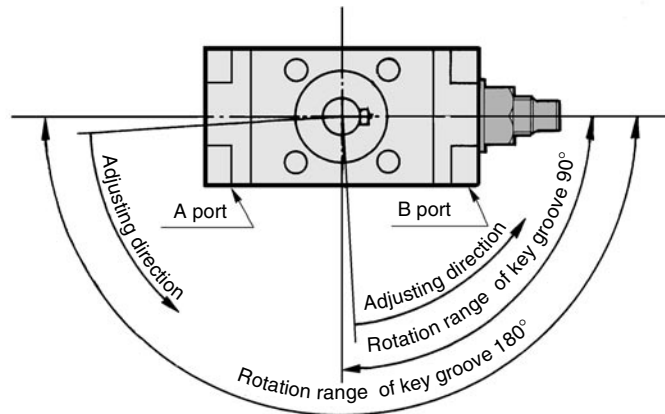

**How to Adjust Angle**

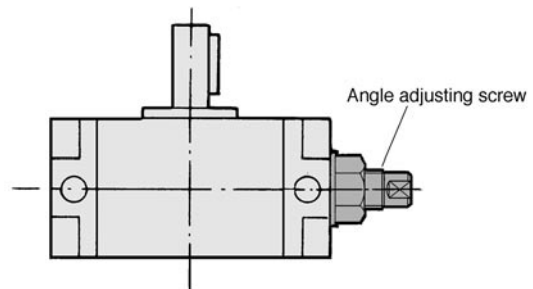

Rotation angle becomes smaller by tightening the angle adjusting screw to the right.


**Adjusting angle per one rotation of angle adjusting screw**

Size	50	63	80	100
Adjusting angle	8.2°	7.0°	6.1°	4.1°




# Series CRA1□□U

## Construction

Standard/CRA1□□U

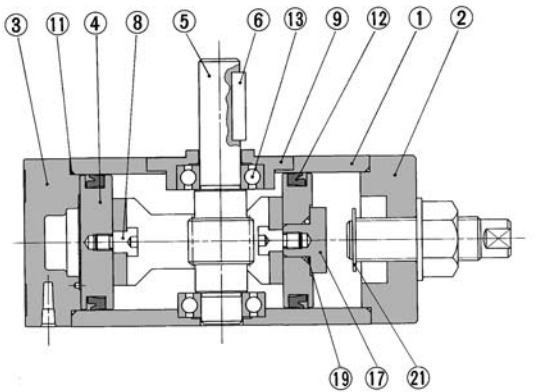

With auto switch/CDRA1□□U

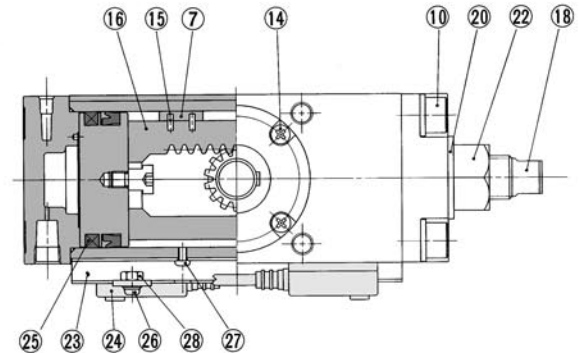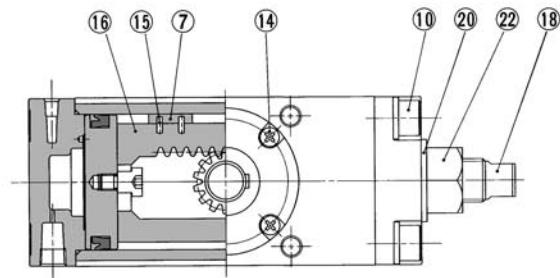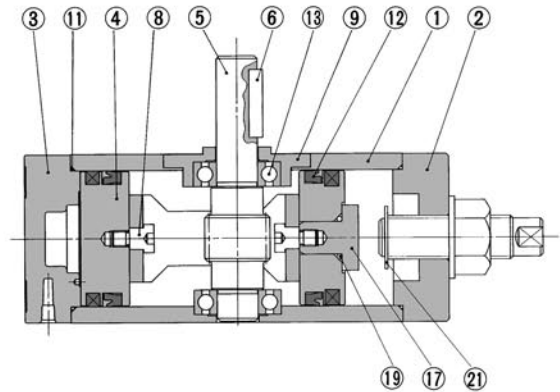

### Component Parts

No.	Description	Material	Note
①	Body	Aluminum alloy	Hard anodized
②	Right cover	Carbon steel	Black zinc anodized
③	Left cover	Aluminum alloy	Black anodized
④	Piston	Aluminum alloy	Chromated
⑤	Shaft	Chromium-molybdenum steel	
⑥	Parallel key	Carbon steel	
⑦	Slider	Delrin	
⑧	Connecting screw	Carbon steel	Zinc chromated
⑨	Bearing retainer	Aluminum alloy	Black anodized
⑩	Hexagon socket head cap screw with spring washer	Chromium-molybdenum steel	Black zinc anodized
⑪	Tube gasket	NBR	
⑫	Piston seal	NBR	
⑬	Bearing	Carbon steel	
⑭	Cross-recessed head cap screw	Steel wire	Black zinc anodized

### Component Parts


No.	Description	Material	Note
⑮	Spring pin	Steel wire	
⑯	Rack	Carbon steel	Nitrided
⑰	Stopper	Carbon steel	Zinc chromated
⑱	Stopper screw	Carbon steel	Black zinc anodized
⑲	O ring	NBR	
⑳	Seal washer	NBR	
㉑	E type stopper ring	Steel wire	Chromated
㉒	Hexagon nut	Steel wire	Nickel plated
㉓	Switch mounting rail	Aluminum alloy	
㉔	Auto switch		
㉕	Plastic magnet	Magnetic substance	
㉖	Cross-recessed head cap screw	Steel wire	Nickel plated
㉗	Cross-recessed head cap screw	Steel wire	Nickel plated
㉘	Hexagon nut	Steel wire	Nickel plated

### Replacement Parts (The corresponding parts shown below are set.)

Size (Type)	With angle adjuster, With angle adjuster and auto switch
<b>CRA1□□U50</b>	P294020-22A
<b>CRA1□□U63</b>	P294030-22A
<b>CRA1□□U80</b>	P294040-22
<b>CRA1□□U100</b>	P294050-22A
Corresponding parts	⑦,⑪,⑫,⑮ and ⑳ are set.


Size **50, 63, 80, 100**/Standard: CRA1□□U

Single shaft style/CRA1BSU

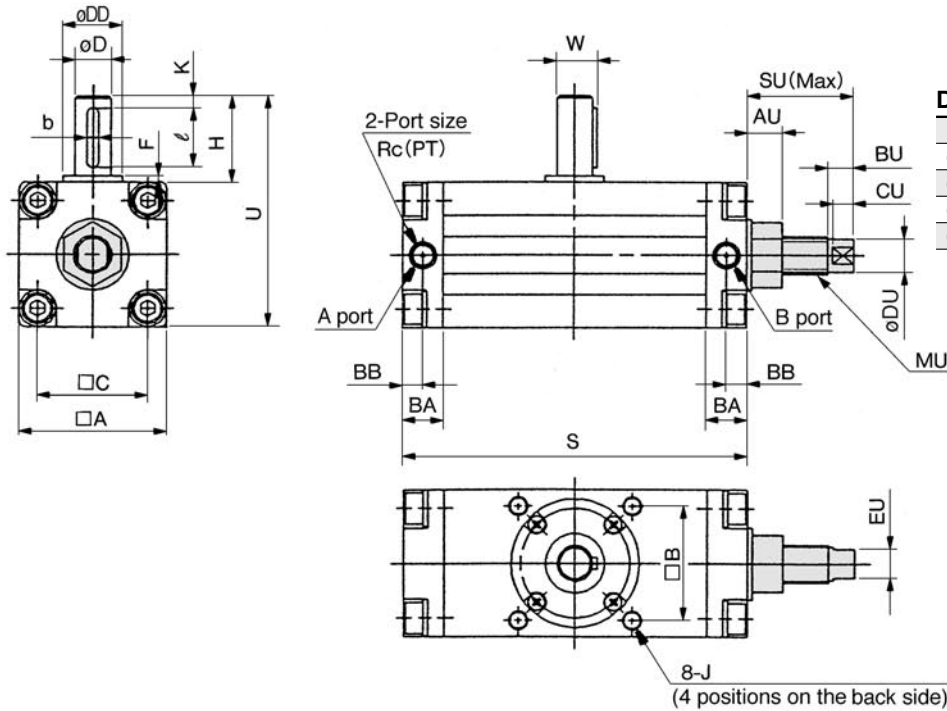

Double shaft style/CRA1BWU

Model	D(g6)	G	L	M	N	UU
CRA1BWU50	15	11	14	20	15	118
CRA1BWU63	17	13	16	22	17	139
CRA1BWU80	20	15	19	25	20	167
CRA1BWU100	25	19	24	30	25	202

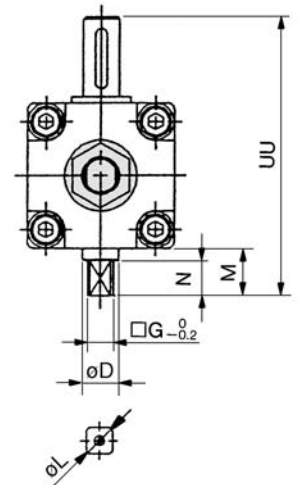

\*The dimensions below show pressurization to B port.  
\*( ) are the dimensions for rotation of 180° and 190°.


Single shaft style

Model	Port size Rc(PT)	A	AU	B	BA	BB	BU	C	CU	D (g6)	DD (h9)	DU	EU	F	H	J	K	MU	S	SU	U	W	Key dimensions	
																							b	ℓ
CRA1BSU50	1/8	62	15	48	17	8.5	11	46	9	15	25	14	12	2.5	36	M8 Depth 8	5	M16 X 1.5	144 (177)	45	98	17	5 <sup>0</sup> <sub>-0.030</sub>	25
CRA1BSU63	1/8	76	19	60	20	10	13	57	11	17	30	18	14	2.5	41	M10 Depth 12	5	M20 X 1.5	163 (201.5)	54.5	117	19.5	6 <sup>0</sup> <sub>-0.030</sub>	30
CRA1BSU80	1/4	92	22	72	23.5	12	16	70	13	20	35	22	19	3	50	M12 Depth 13	5	M24 X 1.5	186 (230)	62.5	142	22.5	6 <sup>0</sup> <sub>-0.030</sub>	40
CRA1BSU100	3/8	112	22	85	25	12.5	16	85	13	25	40	22	19	4	60	M12 Depth 14	5	M24 X 1.5	245 (311)	73.5	172	28	8 <sup>0</sup> <sub>-0.036</sub>	45


# Series CRA1□□U

## Size 50,63,80,100


### Single shaft with four chamfers/ CRA1BXU□



### Double shaft/CRA1BYU□



### Double shaft with four chamfers/ CRA1BZU□

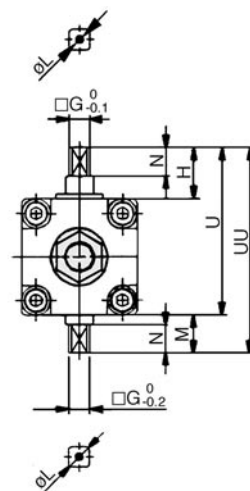

Model	G	H	L	N	U
CRA1BXU□50	11	27	14	15	89
CRA1BXU□63	13	29	16	17	105
CRA1BXU□80	15	38	19	20	130
CRA1BXU□100	19	44	24	25	156

Other dimensions are the same as the single shaft.



Model	l	H	K	UU
CRA1BYU□50	25	36	5	134
CRA1BYU□63	30	41	5	158
CRA1BYU□80	40	50	5	192
CRA1BYU□100	45	60	5	232

Other dimensions are the same as the single shaft.

Model	G	H	L	M	N	U	UU
CRA1BZU□50	11	27	14	20	15	89	109
CRA1BZU□63	13	29	16	22	17	105	127
CRA1BZU□80	15	38	19	25	20	130	155
CRA1BZU□100	19	44	24	30	25	156	186

Other dimensions are the same as the single shaft.

### Foot style/CRA1L□U

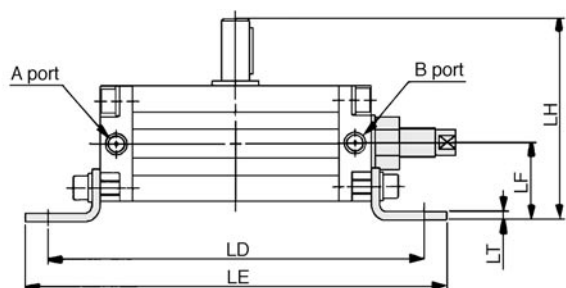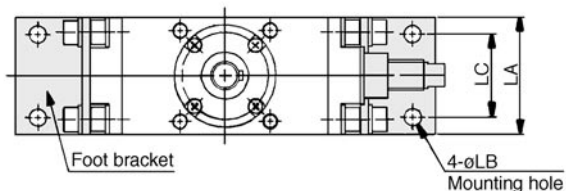

\*The dimensions below show pressurization to B port.


\*( ) are the dimensions for rotation of 180° and 190°.

Other dimensions are the same as the single shaft.

Model	LA	LB	LC	LD	LE	LF	LH	LT
CRA1L□U50	62	9	44	200 (233)	224 (257)	41	108	4.5
CRA1L□U63	76	11	55	235 (273.5)	263 (301.5)	48	127	5
CRA1L□U80	92	13	67	274 (318)	316 (360)	58	154	6
CRA1L□U100	112	13	87	333 (399)	375 (441)	73.5	189.5	6


Size **50, 63, 80, 100**

Single shaft flange style/CRA1FSU

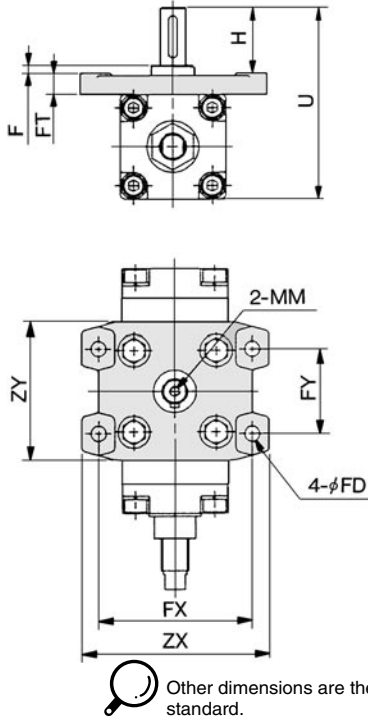


Model	F	FD	FT	FX	FY	H	MM	U	ZX	ZY
CRA1F□U50	4	9	13	90	50	39	M6 X 12	114	110	81
CRA1F□U63	5	11.5	15	105	59	45	M6 X 12	136	130	101
CRA1F□U80	5	13.5	18	130	76	55	M8 X 16	165	160	119
CRA1F□U100	5	13.5	18	150	92	60	M10 X 20	190	180	133

Flange style  
Double shaft/  
CRA1FWU




Model	H	N	U	UU
CRA1FWU50	39	15	114	134
CRA1FWU63	45	17	136	158
CRA1FWU80	55	20	165	190
CRA1FWU100	60	25	190	220

Flange style  
Single shaft with  
four chamfers/  
CRA1FXU




Model	H	N	U
CRA1FXU50	30	15	105
CRA1FXU63	33	17	124
CRA1FXU80	43	20	153
CRA1FXU100	44	25	174

Flange style  
Double shaft key/  
CRA1FYU



Model	H	U	UU
CRA1FYU50	39	114	150
CRA1FYU63	45	136	177
CRA1FYU80	55	165	215
CRA1FYU100	60	190	250

Flange style  
Double shaft with  
four chamfers/  
CRA1FZU




Model	H	N	U	UU
CRA1FZU50	30	15	105	125
CRA1FZU63	33	17	124	146
CRA1FZU80	43	20	153	178
CRA1FZU100	44	25	174	204

# Series CRA1□□U

## Size 50,63,80,100


### Single shaft style/CDRA1BSU

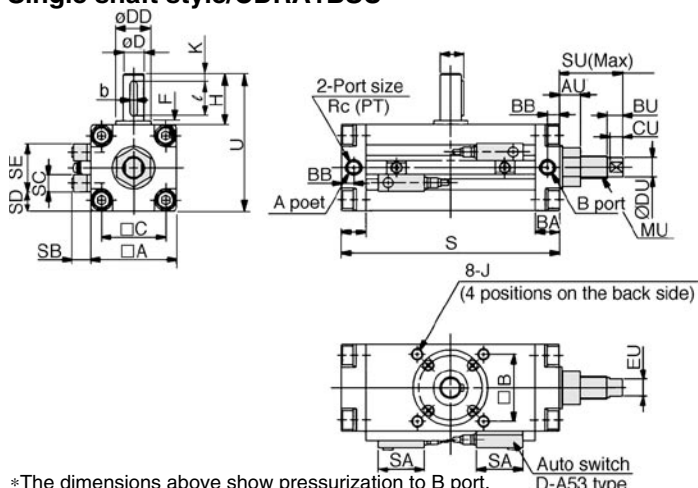

\*The dimensions above show pressurization to B port.  
 \*( ) are the dimensions for rotation of 180° and 190°


Model	Port size Rc(PT)	□A	□B	□C	øD (g6)	øDD (h9)	F	H	J	K	S	U	W	BA	BB	SA	SB	SC	SD	SE	Key dimensions		AU	BU	CU	DU	EU	SU	MU
																					b	ℓ							
CDRA1BSU50	1/8	62	48	46	15	25	2.5	36	M8 Depth8	5	156 (189)	98	17	17	8.5	33	13.5	12	14	34	5 <sup>0</sup> <sub>-0.030</sub>	25	15	11	9	14	12	45	M16 X 1.5
CDRA1BSU63	1/8	76	60	57	17	30	2.5	41	M10 Depth12	5	175 (213.5)	117	19.5	20	10	33	14.5	12	21	34	6 <sup>0</sup> <sub>-0.030</sub>	30	19	13	11	18	14	54.5	M20 X 1.5
CDRA1BSU80	1/4	92	72	70	20	35	3	50	M12 Depth13	5	199 (243)	142	22.5	23.5	12	33	15.5	12	29	34	6 <sup>0</sup> <sub>-0.030</sub>	40	22	16	13	22	19	62.5	M24 X 1.5
CDRA1BSU100	3/8	112	85	85	25	40	4	60	M12 Depth14	5	259 (325)	172	28	25	12.5	33	16	12	39	34	8 <sup>0</sup> <sub>-0.036</sub>	45	22	16	13	22	19	73.5	M24 X 1.5

### Double shaft style/CDRA1BWU



Model	øD (g6)	□G	M	N	UU	øL
CDRA1BWU50	15	11	20	15	118	14
CDRA1BWU63	17	13	22	17	139	16
CDRA1BWU80	20	15	25	20	167	19
CDRA1BWU100	25	19	30	25	202	24


### Foot style/CDRA1LSU

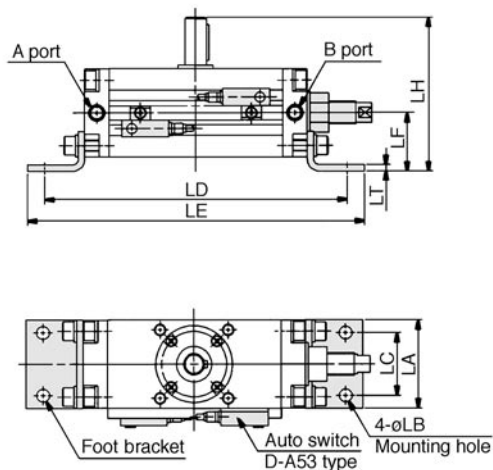

\*The dimensions above show pressurization to B port.  
 \*( ) are the dimensions for rotation of 180° and 190°  
 Note) Other dimensions are the same as the single shaft.

Model	LA	øLB	LC	LD	LE	LF	LH	LT
CDRA1LSU50	62	9	44	212 (245)	236 (269)	41	108	4.5
CDRA1LSU63	76	11	55	247 (285.5)	275 (313.5)	48	127	5
CDRA1LSU80	92	13	67	287 (331)	329 (373)	58	154	6
CDRA1LSU100	112	13	87	347 (413)	389 (455)	73.5	189.5	6

### Single shaft flange style/CDRA1FSU

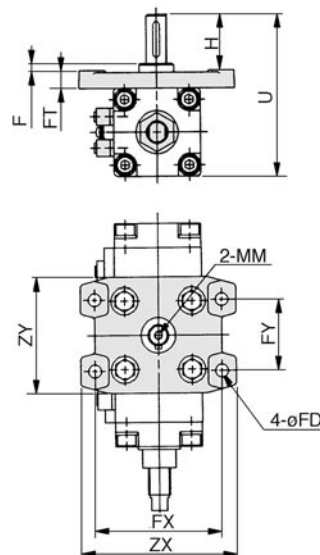

Model	F	H	MM	U	øFD	FT	FX	FY	ZX	ZY
CDRA1FSU50	4	39	M6 Depth12	114	9	13	90	50	110	81
CDRA1FSU63	5	45	M6 Depth12	136	11.5	15	105	59	130	101
CDRA1FSU80	5	55	M8 Depth16	165	13.5	18	130	76	160	119
CDRA1FSU100	5	60	M10 Depth20	190	13.5	18	150	92	180	133

# Series CRA1 **ALMOTION** Made to Order Specifications Change of Shaft End Shape/-XA1 to XA46



Consult SMC for further information on specifications, dimensions and delivery.

## Symbols

### -XA1 to XA46

## 1 Change of shaft end shape

A wide selection of models is now available, as non-standard shaft configurations for the CRA1 series rotary actuators are provided in 60 styles.


### Applicable patterns

Size	30, 50, 63, 80, 100
Pattern	XA1 to XA24, XA33 to XA46, XC7 to XC11, XC30 to XC64

### Additional reminders

- Enter the dimensions within a range that allows for additional machining.
- SMC will make appropriate arrangements if no dimensions, tolerance, or finish instructions are given in the diagram.
- The length of the unthreaded portion is 2 to 3 pitches.
- Unless specified otherwise, the thread pitch is based on coarse metric threads.  
P = thread pitch  
M3, M4, M5,  
M6, M8, M10
- Enter the desired values in the  portion of the diagram.
- Consult SMC for made to order specifications other than those mentioned in "How to Order".
- Individual drawings for specific made to order models may not be available.  
Consult SMC separately if drawings are needed.

## How to Order

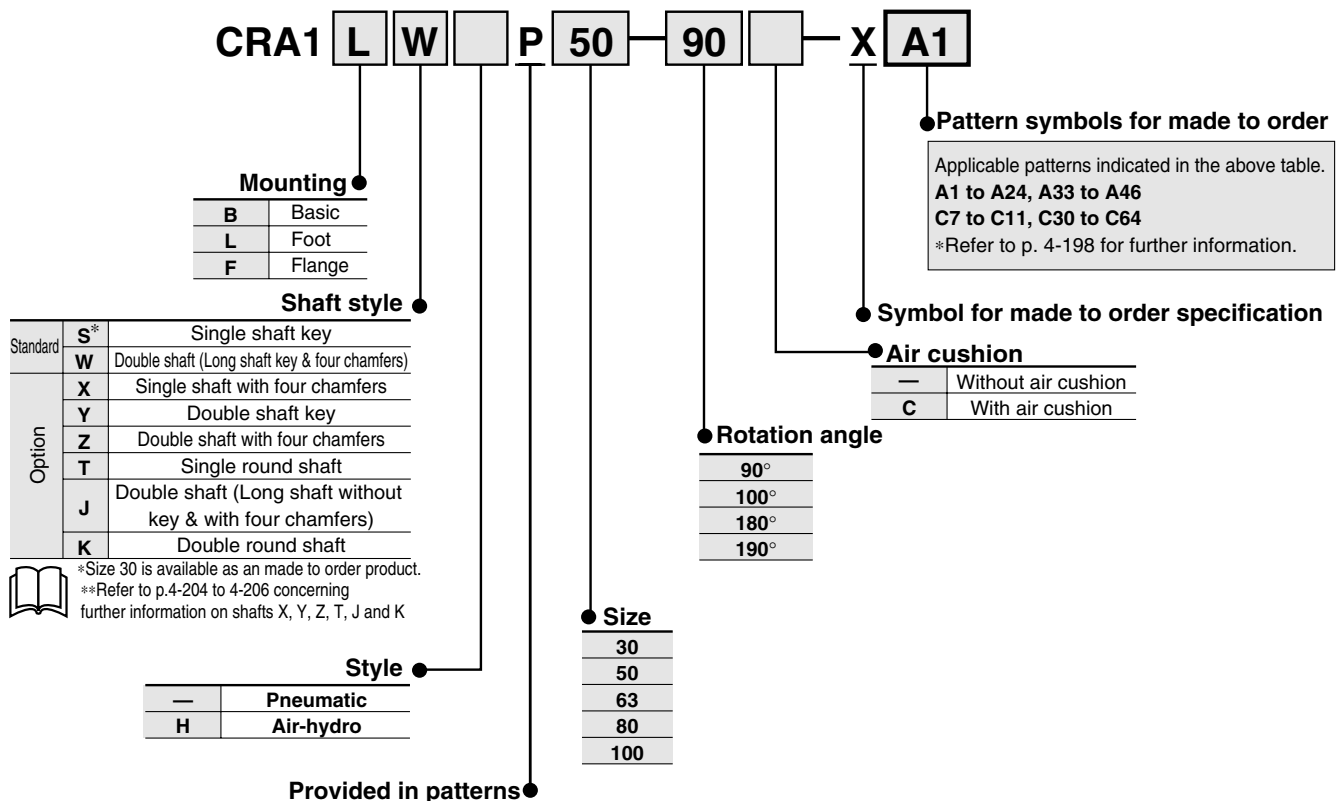

### How to order model with auto switches

Refer to p.4-185 concerning how to order for the auto switch equipped type.

### How to order angle adjustable style

Refer to p.4-190 concerning how to order for the angle adjustable type.

# Series CRA1 **ALMOTION**

## Made to Order Specifications

### Change of Shaft End Shape/-XA1 to XA46

Consult SMC for further information on specifications, dimensions and delivery.

## 1 Change of shaft end shape Symbols -XA1 to XA46

### Applicable shaft style/Pattern combination table (Size: 30, 50, 63, 80, 100)

Shaft style/S (Single shaft), W (Double shaft), Y (Double shaft key)

Symbol	Description	Shaft direction		Applicable size
		Upper	Lower	
-XA1	Female thread at the shaft end	●	—	30
-XA2	Female thread at the shaft end	—	●	
-XA13	Shaft through-hole	●	●	50
-XA14	Shaft through-hole and female thread	●	—	63
-XA15	Shaft through-hole and female thread	—	●	80
-XA16	Shaft through-hole and female thread	●	●	100
-XA24	Double key	●	—	

Shaft style

Symbol	Description	Shaft direction		Shaft style							Applicable size	
		Upper	Lower	J	K	S	T	Y	X	Z		
-XA33	Female thread at the shaft end	●	—	●	●	—	●	—	—	—	—	30
-XA34	Female thread at the shaft end	—	●	●	●	—	●	—	—	—	—	
-XA35	Female thread at the shaft end	●	—	—	—	—	—	—	●	●	—	50
-XA36	Female thread at the shaft end	—	●	—	—	—	—	—	●	●	—	
-XA37	Round shaft with steps	●	—	●	●	—	●	—	—	—	—	63
-XA38	Round shaft with steps	—	●	—	●	—	—	—	—	—	—	
-XA40	Shaft through-hole	●	●	—	●	—	●	—	—	—	—	80
-XA41	Shaft through-hole	●	●	●	—	—	—	—	●	●	—	
-XA43	Shaft through-hole with female	●	●	—	●	—	●	—	—	—	—	100
-XA44	Shaft through-hole with female	●	●	●	—	—	—	—	●	●	—	
-XA45	Intermediate chamfer	●	—	●	●	—	●	—	—	—	—	
-XA46	Intermediate chamfer	—	●	—	●	—	—	—	—	—	—	

Shaft style

Symbol	Description	Shaft style								Applicable size		
		S	W	X	Y	Z	T	J	K			
-XC7	Reverse mounting of rotation shaft	●	●	●	—	—	●	●	—	50		
-XC8	Change of rotation range	●	●	—	●	—	—	—	—			
-XC9		●	●	—	●	—	—	—	—			
-XC10		●	●	—	●	—	—	—	—			
-XC11		●	●	—	●	—	—	—	—			
-XC30	Fluorine grease	●	●	●	●	●	●	●	●	30 to 100		
-XC31	Change of rotation range and shaft rotation direction	●	●	—	●	—	—	—	—	50		
-XC32		●	●	—	●	—	—	—	—			
-XC33		●	●	—	●	—	—	—	—			
-XC34		●	●	—	●	—	—	—	—			
-XC35	Change of rotation range and angle adjusting direction	●	●	—	●	—	—	—	—	63		
-XC36		●	●	—	●	—	—	—	—			
-XC37		●	●	—	●	—	—	—	—			
-XC38		●	●	—	●	—	—	—	—			
-XC39		●	●	—	●	—	—	—	—			
-XC40		●	●	—	●	—	—	—	—			
-XC41		●	●	—	●	—	—	—	—			
-XC42		●	●	—	●	—	—	—	—			
-XC43		●	●	—	●	—	—	—	—			
-XC44		●	●	—	●	—	—	—	—			
-XC45	Change of rotation range and angle adjusting direction (Angle adjusting screw is equipped on the left.)	●	●	—	●	—	—	—	—	80		
-XC46		●	●	—	●	—	—	—	—			
-XC47		●	●	—	●	—	—	—	—			
-XC48		●	●	—	●	—	—	—	—			
-XC49		●	●	—	●	—	—	—	—			
-XC50		●	●	—	●	—	—	—	—			
-XC51		●	●	—	●	—	—	—	—			
-XC52		●	●	—	●	—	—	—	—			
-XC53		●	●	—	●	—	—	—	—			
-XC54		●	●	—	●	—	—	—	—			
-XC55	Change of port direction	●	●	—	●	—	—	—	—	100		
-XC56		●	●	—	●	—	—	—	—			
-XC57		●	●	—	●	—	—	—	—			
-XC58		●	●	—	●	—	—	—	—			
-XC59		●	●	—	●	—	—	—	—			
-XC60		●	●	—	●	—	—	—	—			
-XC61		●	●	—	●	—	—	—	—			
-XC62		Reverse mounting of auto switch	●	●	●	●	●	●	●		●	50
-XC63		One side hydro, One side air	●	●	●	●	●	●	●		●	63
-XC64		One side hydro, One side air	●	●	●	●	●	●	●		●	80
		●	●	●	●	●	●	●	●	100		



# Series CRA1 **ALMOTION** Made to Order Specifications Change of Shaft End Shape/-XA1 to XA33

Consult SMC for further information on specifications, dimensions and delivery.

## 1 Change of shaft end shape

Symbols

-XA1 to XA33


### Additional reminders

- Enter the dimensions within a range that allows for additional machining.
- SMC will make appropriate arrangements if no dimensional, tolerance, or finish instructions are given in the diagram.
- The length of the unthreaded portion is 2 to 3 pitches.
- Unless specified otherwise, the thread pitch is based on coarse metric threads.  
P = thread pitch  
M3, M4, M5  
M6, M8, M10
- Enter the desired figures in the  portion of the diagram.
- If not specified, the chamfer "C" is 0.5.

### Symbol: A1

Note) Except for the flange style

Machine female threads into the long end of the shaft. (Shafts S, W and Y are additionally machined.) The L dimension (maximum) is, as a rule, twice the size of the bolt.

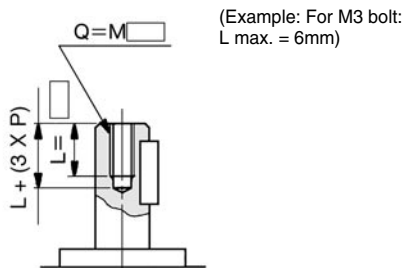


Size	Q
30	M3
50	M4, M5, M6
63	M4, M5, M6
80	M4, M5, M6, M8
100	M5, M6, M8, M10

### Symbol: A2

Note) Except for the flange style.

Machine female threads into the short end of the shaft. (Shafts S, W and Y are additionally machined.) The L dimension (maximum) is, as a rule, twice the size of the bolt.

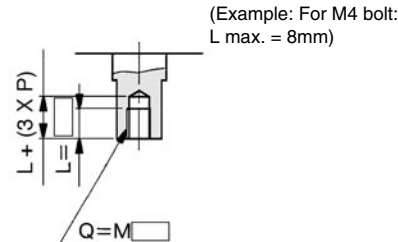


Size	Q
30	M3, M4
50	M4, M5, M6
63	M4, M5, M6
80	M4, M5, M6, M8
100	M5, M6, M8, M10

### Symbol: A13

Note) Except for the flange style

Shaft through-hole (Shafts S, W, Y are additionally machined)

Note) The minimum range of the machinable dimension for the  $\phi d$  area is 0.1mm.




Size	d
30	$\phi 2.5$
50	$\phi 4$ to $\phi 7$
63	$\phi 4$ to $\phi 8$
80	$\phi 6.8$ to $\phi 11$
100	$\phi 6.8$ to $\phi 13$

### Symbol: A14

Note) Except for the flange style

Machine a special end (at the long end of the shaft), and machine female threads in the through-hole at the long end of the shaft, thus creating a through-hole to serve as the pilot hole. (Shafts S, W, Y are additionally machined.)

The L dimension (maximum) is, as a rule, twice the size of the bolt. (Example: For M5 bolt: L max. = 10mm)




Size	30	50	63	80	100
Thread	$\phi 2.5$	—	—	—	—
M3	$\phi 2.5$	—	—	—	—
M5	—	$\phi 4$	$\phi 4$	—	—
M6	—	$\phi 5$	$\phi 5$	—	—
M8	—	—	$\phi 6.8$	$\phi 6.8$	$\phi 6.8$
M10	—	—	—	$\phi 8.5$	$\phi 8.5$
M12	—	—	—	$\phi 10.3$	$\phi 10.3$
Rc X PT $\frac{1}{8}$	—	—	—	$\phi 8$	$\phi 8$
Rc X PT $\frac{1}{4}$	—	—	—	—	$\phi 11$

### Symbol: A15

Note) Except for the flange style

Machine a special end (at the short end of the shaft), and machine female threads in the through-hole at the short end of the shaft, thus creating a through-hole to serve as the pilot hole. (Shafts S, W, Y are additionally machined.)

The L dimension (maximum) is, as a rule, twice the size of the bolt. (Example: For M4 bolt: L max. = 8mm)



Size	30	50	63	80	100
Thread	$\phi 2.5$	—	—	—	—
M3	$\phi 2.5$	—	—	—	—
M5	—	$\phi 4$	$\phi 4$	—	—
M6	—	$\phi 5$	$\phi 5$	—	—
M8	—	—	$\phi 6.8$	$\phi 6.8$	$\phi 6.8$
M10	—	—	—	$\phi 8.5$	$\phi 8.5$
M12	—	—	—	$\phi 10.3$	$\phi 10.3$
Rc (PT) $\frac{1}{8}$	—	—	—	$\phi 8$	$\phi 8$
Rc (PT) $\frac{1}{4}$	—	—	—	—	$\phi 11$

### Symbol: A16


Note) Except for the flange style

Machine special ends (at both the long and short ends of the shaft), and machine female threads in the through-hole at both the long and short ends of the shaft, thus creating through-holes to serve as pilot holes.

(Shafts S, W, Y are additionally machined.)

The L dimension (maximum) is basically twice the size of the bolt.

(Example: For M5 bolt: L max. = 10mm)




Size	30	50	63	80	100
Thread	$\phi 2.5$	—	—	—	—
M3	$\phi 2.5$	—	—	—	—
M5	—	$\phi 4$	$\phi 4$	—	—
M6	—	$\phi 5$	$\phi 5$	—	—
M8	—	—	$\phi 6.8$	$\phi 6.8$	$\phi 6.8$
M10	—	—	—	$\phi 8.5$	$\phi 8.5$
M12	—	—	—	$\phi 10.3$	$\phi 10.3$
Rc(PT) $\frac{1}{8}$	—	—	—	$\phi 8$	$\phi 8$
Rc (PT) $\frac{1}{4}$	—	—	—	—	$\phi 11$

### Symbol: A24

Double keys

Additionally machine a key groove at 180° from the standard key position.

(Shafts S, W, Y are additionally machined.)



Size	Key groove dimension	L1
30	3 X 3 X 14	3
50	5 X 5 X 25	5
63	6 X 6 X 30	5
80	6 X 6 X 40	5
100	8 X 7 X 45	5

### Symbol: A33


Note) Except for the flange style

Machine female threads into the long end of the shaft.

(Shafts J, K and T are additionally machined.)

The L dimension (maximum) is, as a rule, twice the size of the bolt.

(Example: For M3 bolt: L max. = 6mm)



Size	Q
30	M3
50	M4, M5, M6, M8
63	M4, M5, M6, M8, M10
80	M4, M5, M6, M8, M10, M12
100	M5, M6, M8, M10, M12


# Series CRA1 **ALMOTION** Made to Order Specifications Change of Shaft End Shape/-XA34 to XA44

Consult SMC for further information on specifications, dimensions and delivery.

## 1 Change of shaft end shape


## Symbols -XA34 to XA44

**Symbol: A34** Note) Except for flange style  
Machine female threads into the short end of the shaft.  
(Shafts J, K and T additionally machined)  
The L dimension (maximum) is, as a rule, twice the size of the bolt.  
(Example: For M3 bolt: L = 6)

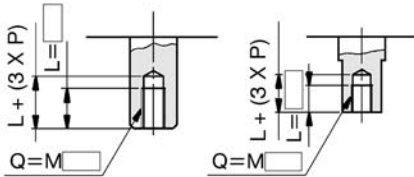


Size	Q
30	M3
50	M4, M5, M6, M8
63	M4, M5, M6, M8, M10
80	M4, M5, M6, M8, M10, M12
100	M5, M6, M8, M10, M12

**Symbol: A35** Note) Except for flange style  
Machine female threads into the long end of the shaft.  
(Shafts X and Z additionally machined)  
The L dimension (maximum) is, as a rule, twice the size of the bolt.  
(Example: For M3 bolt: L = 6)




Size	Q
30	M3
50	M4, M5, M6, M8
63	M4, M5, M6, M8, M10
80	M4, M5, M6, M8, M10, M12
100	M5, M6, M8, M10, M12

**Symbol: A36** Note) Except for flange style  
Machine threads into the short end of the shaft.  
(Shafts X and Z additionally machined)  
The L dimension (maximum) is, as a rule, twice the size of the bolt.  
(Example: For M3 bolt: L = 6)




Size	Q
30	M3
50	M4, M5, M6, M8
63	M4, M5, M6, M8, M10
80	M4, M5, M6, M8, M10, M12
100	M5, M6, M8, M10, M12

**Symbol: A37** Note) Except for flange style  
The shaft can be further shortened by machining a round shaft with steps on the long end of the shaft.  
(Shafts J, K and T are additionally machined)  
(If the shaft is not to be shortened, leave the X dimension blank)




Size	X	Lmax
30	3 to 25	X-2
50	3.5 to 36	X-2.5
63	3.5 to 41	X-2.5
80	4 to 50	X-3
100	5 to 60	X-4

**Symbol: A38** Note) Except for flange style  
The shaft can be further shortened by machining a round shaft with steps on the short end of the shaft.  
(Shaft K are additionally machined)  
(If the shaft is not to be shortened, leave the Y dimension blank)




Size	Y	Lmax
30	1 to 25	Y
50	1 to 36	Y
63	1 to 41	Y
80	1 to 50	Y
100	1 to 60	Y

**Symbol: A40** Note) Except for flange style  
Shaft through-hole  
(Shafts K and T are additionally machined)

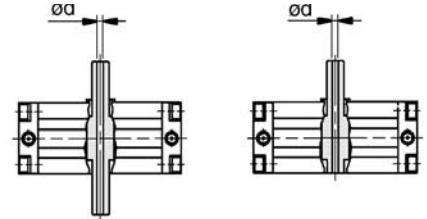


Size	d
30	ø2.5
50	ø4 to ø 7.5
63	ø4 to ø 8
80	ø6.8 to ø11
100	ø6.8 to ø13

**Symbol: A41** Note) Except for flange style  
Shaft through-hole  
(Shafts J, X and Z are additionally machined)

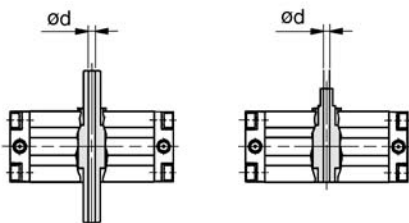


Size	d
30	ø2.5
50	ø4 to ø 7.5
63	ø4 to ø 8
80	ø6.8 to ø11
100	ø6.8 to ø13

**Symbol: A43** Note) Except for flange style  
Shaft through-hole and female thread  
(Shafts K and T are additionally machined)

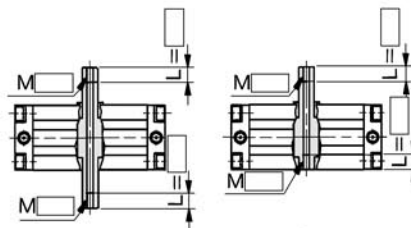

Size	30	50	63	80	100
Thread	ø2.5	—	—	—	—
M3	—	—	—	—	—
M5	—	ø4	ø4	—	—
M6	—	ø5	ø5	—	—
M8	—	—	ø6.8	ø 6.8	ø 6.8
M10	—	—	—	ø 8.5	ø 8.5
M12	—	—	—	ø10.3	ø10.3
Rc(PT)1/8	—	—	—	ø 8	ø 8
Rc(PT)1/4	—	—	—	—	ø11

**Symbol: A44** Note) Except for flange style  
Shaft through-hole and female thread  
(Shafts J, X and Z are additionally machined)

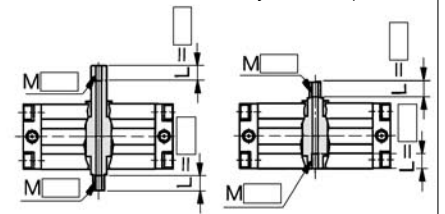

Size	30	50	63	80	100
Thread	ø2.5	—	—	—	—
M3	—	—	—	—	—
M5	—	ø4	ø4	—	—
M6	—	ø5	ø5	—	—
M8	—	—	ø6.8	ø 6.8	ø 6.8
M10	—	—	—	ø 8.5	ø 8.5
M12	—	—	—	ø10.3	ø10.3
Rc(PT)1/8	—	—	—	ø 8	ø 8
Rc(PT)1/4	—	—	—	—	ø11

# Series CRA1 **ALMOTION**

## Made to Order Specifications

### Change of Shaft End Shape/-XA45 to -XA46

### Change of Rotation Range (Size 50 to 100)/-XC8 to -XC11

Consult SMC for further information on specifications, dimensions and delivery.

## 1 Symbols

### Change of shaft end shape -XA45, XA46

## 2 Symbols

### Change of rotation range -XC8 to XC11

### Additional reminders


- Enter the dimensions within a range that allows for additional machining.
- SMC will make appropriate arrangements if no dimensions, tolerance, or finish instructions are given in the diagram.
- Enter the desired figures in the  portion of the diagram.

#### Symbol: A45

Note) Except for the flange style.

The shaft can be further shortened by machining an intermediate flat on the long end of the shaft (the position is that of the standard flat, the key groove part).

(Shafts J, K and T are additionally machined.)




Size	X	W	L1max	L2max
30	8.5 to 25	1 to 2	X - 2	L1-2
50	12.5 to 36	1 to 5.5	X - 2.5	L1-2
63	13.5 to 41	1 to 6.5	X - 2.5	L1-2
80	16.5 to 50	1 to 8	X - 3	L1-3
100	21 to 60	1.5 to 10.5	X - 4	L1-4

#### Symbol: A46

Note) Except for the flange style.

The shaft can be further shortened by machining an intermediate chamfering on the short end of the shaft (the position is that of the standard chamfering, the key groove part).

(Shaft K is additionally machined.)



Size	Y	W	L1max	L2max
30	6.5 to 25	1 to 2	Y	L1-2
50	10 to 36	1 to 5.5	Y	L1-2
63	11 to 41	1 to 6.5	Y	L1-2
80	13.5 to 50	1 to 8	Y	L1-3
100	17 to 60	1.5 to 10.5	Y	L1-4

CRA1 → Refer to the "How to Order" on p.4-197 — XC8

### Specification


Applicable size	50, 63, 80, 100
Applicable shaft style	Shaft S, W, Y

• Symbol  
XC8 to -XC11

The patterns with the rotation angle of 90° and 180° are applicable to the respective patterns with the rotation angles of 100° and 190° of the Made to order specifications.

#### Symbol: C8


The rotation range is changed.

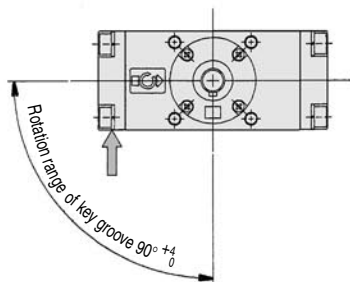

Note) If it is pressurized from the port indicated with the arrow, the shaft rotates in the clockwise direction.

#### Symbol: C9


The rotation range is changed.

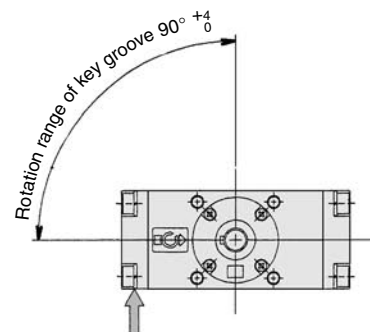

Note) If it is pressurized from the port indicated with the arrow, the shaft rotates in the clockwise direction.

#### Symbol: C10


The rotation range is changed.

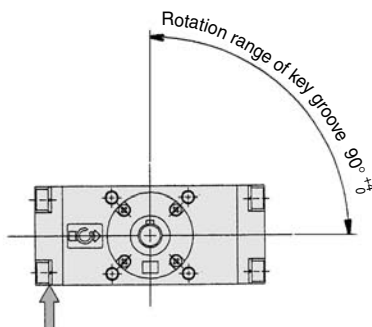

Note) If it is pressurized from the port indicated with the arrow, the shaft rotates in the clockwise direction.

#### Symbol: C11

The rotation range is changed.

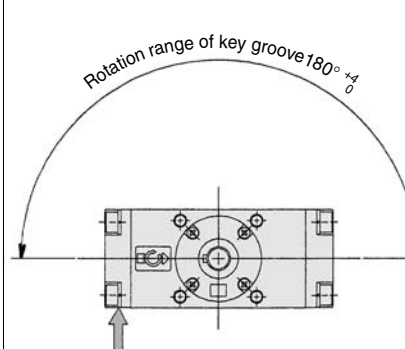

Note) If it is pressurized from the port indicated with the arrow, the shaft rotates in the clockwise direction.

# Series **CRA1** **ALMOTION**


## Made to Order Specifications

### Reverse Mounting of Rotation Shaft (Size: 50 to 100) **/-XC7**

### Change of Rotation Range (Size: 30 to 100) **/-XC30**

Consult SMC for further information on specifications, dimensions and delivery.


#### **3** Reverse mounting of rotation shaft Symbol **-XC7**

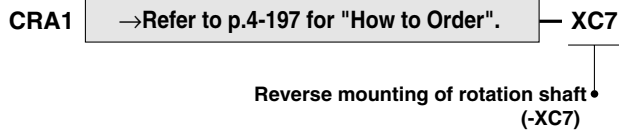

#### Specifications

Applicable size	50, 63, 80, 100
Applicable shaft style	Shaft S, W, X, T, J

#### **4** Fluorine grease Symbol **-XC30**

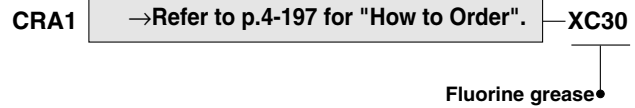


Lubricant oil in the seal part of packing and inner wall of the cylinder is changed to fluorine type.

#### Specifications

Applicable size	30, 50, 63, 80, 100
Applicable shaft style	S, W, X, Y, Z, T, J, K

\*Refer to p.4-177 for other specifications.  
\*\*Except for air-hydro type.

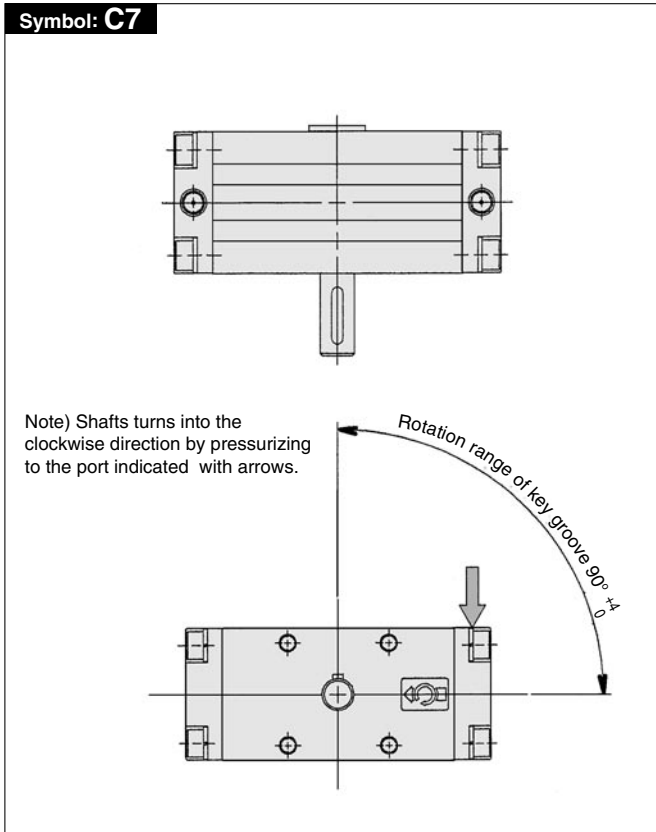

**Series CRA1** (Size 50 to 100)

**Made to Order Specifications**

**Change of Rotation Range and Rotation Direction of Shaft/-XC31 to -XC36**

Consult SMC for further information on specifications, dimensions and delivery.

**5** Change of the rotation range and the rotation direction of shaft Symbols **-XC31 to XC36**







CRA1 → Refer to the "How to Order" on p.4-197 —XC31

**Specification**

Applicable size	50, 63, 80, 100
Applicable shaft style	Shaft S, W, Y

•The rotation range and the rotation direction of the shaft are changed. (-XC31 to -XC36)

The patterns with the rotation angle of 90° and 180° are applicable to the respective patterns with the rotation angles of 100° and 190° of the Made to order specification.
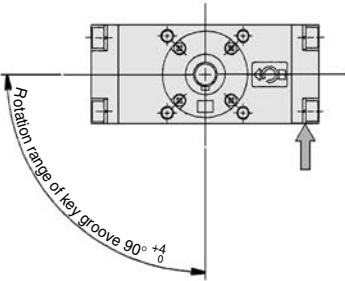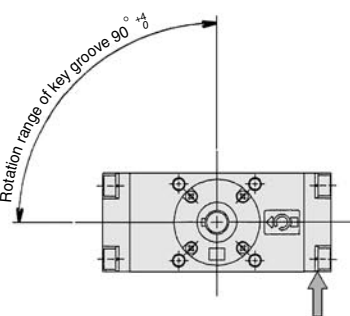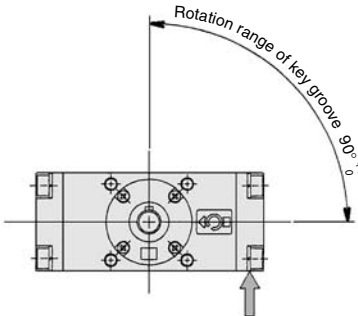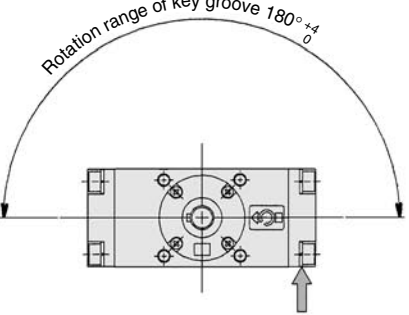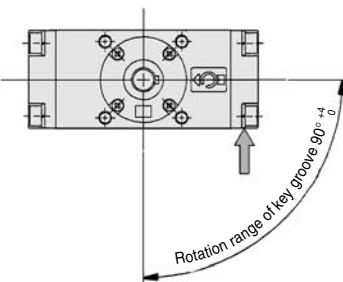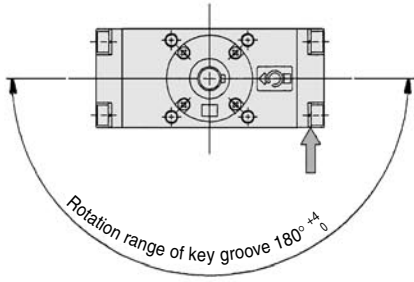
<p><b>Symbol: C31</b></p> <p>The rotation range is changed and the rotating direction is reversed.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C32</b></p> <p>The rotation range is changed and the rotating direction is reversed.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C33</b></p> <p>The rotation range is changed and the rotating direction is reversed.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>
<p><b>Symbol: C34</b></p> <p>The rotation range is changed and the rotating direction is reversed.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C35</b></p> <p>The rotation range is changed and the rotating direction is reversed.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C36</b></p> <p>The rotation range is changed and the rotating direction is reversed.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>

**Series CRA1** (Size 50 to 100)

**Made to Order Specifications**

**Change of Rotation Range and Angle Adjusting Direction/-XC37 to -XC42**

Consult SMC for further information on specifications, dimensions and delivery.

Symbols

**6** Change of rotation range and the angle adjusting direction **-XC37 to XC42**













CRA1 → Refer to the "How to Order" on p.4-197 —XC37

**Specification**

Applicable size	50, 63, 80, 100
Applicable shaft style	Shaft S, W, Y

• The rotation range and the angle adjusting direction are changed. (-XC37 to XC42)

The patterns with the rotation angle of 90° and 180° are applicable to the respective patterns with the rotation angles of 100° and 190° of the Made to order specification.
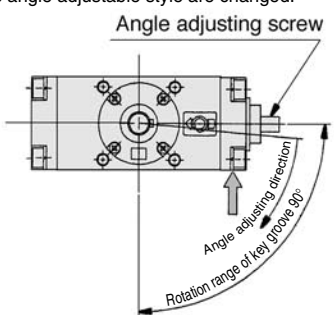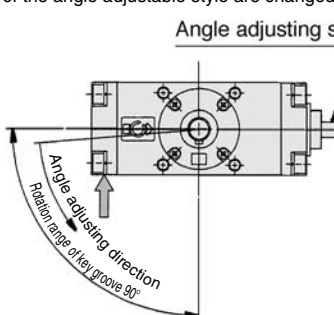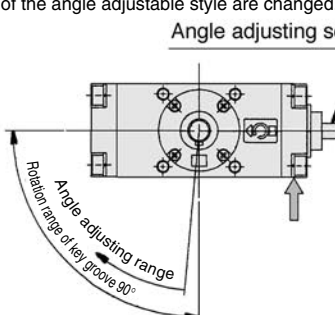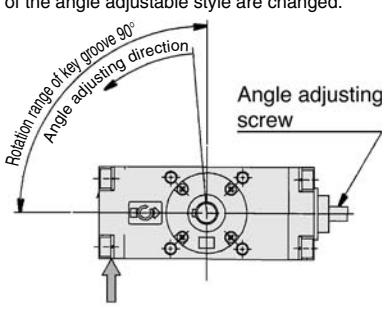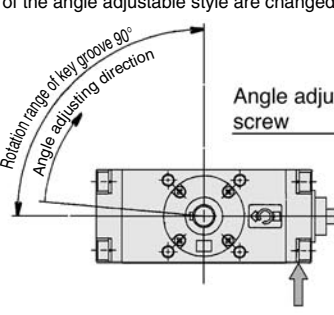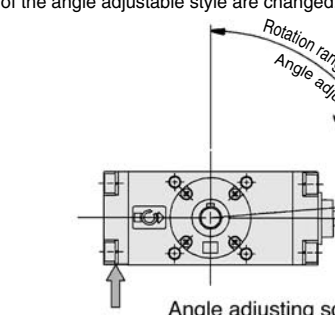
<p><b>Symbol: C37</b></p> <p>The rotation range and the angle adjusting direction of the angle adjustable style are changed.</p>  <p>The rotation range under the adjustment of an angle at 60° is indicated below.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C38</b></p> <p>The rotation range and the angle adjusting direction of the angle adjustable style are changed.</p>  <p>The rotation range under the adjustment of an angle at 60° is indicated below.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C39</b></p> <p>The rotation range and the angle adjusting direction of the angle adjustable style are changed.</p>  <p>The rotation range under the adjustment of an angle at 60° is indicated below.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>
<p><b>Symbol: C40</b></p> <p>The rotation range and the angle adjusting direction of the angle adjustable style are changed.</p>  <p>The rotation range under the adjustment of an angle at 60° is indicated below.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C41</b></p> <p>The rotation range and the angle adjusting direction of the angle adjustable style are changed.</p>  <p>The rotation range under the adjustment of an angle at 60° is indicated below.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C42</b></p> <p>The rotation range and the angle adjusting direction of the angle adjustable style are changed.</p>  <p>The rotation range under the adjustment of an angle at 60° is indicated below.</p>  <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>



**Series CRA1** (Size 50 to 100)

**Made to Order Specifications**

**Change of Rotation Range and Angle Adjusting Direction/-XC43 to -XC46**

Consult SMC for further information on specifications, dimensions and delivery.

Symbols

**6** Change of rotation range and angle adjusting direction **-XC43 to XC46**

CRA1 →Refer to the "How to Order" on p.4-197 —XC43

**Specification**


Applicable size	50, 63, 80, 100
Applicable shaft style	Shaft S, W, Y

• The rotation range and the angle adjusting direction are changed. (-XC43 to XC46)


The patterns with the rotation angle of 90° and 180° are applicable to the respective patterns with the rotation angles of 100° and 190° of the Made to order specification.

**Symbol: C43**

The rotation range and the angle adjusting direction of the angle adjustable style are changed.

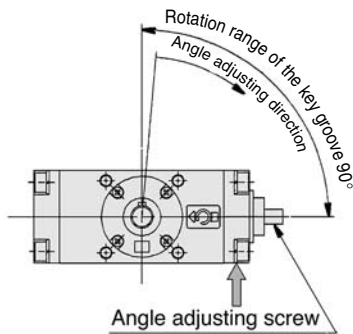


The rotation range under the adjustment of an angle a 60° is indicated below

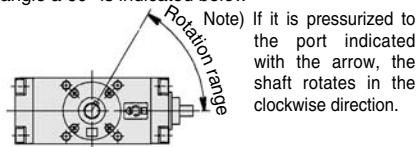


**Symbol: C44**

The rotation range and the angle adjusting direction of the angle adjustable style are changed.

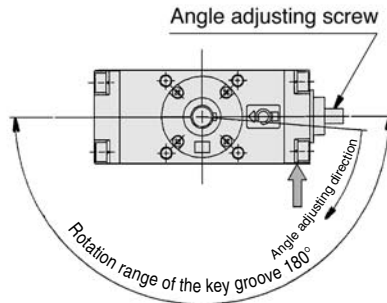


The rotation range under the adjustment of an angle at 120° is indicated below

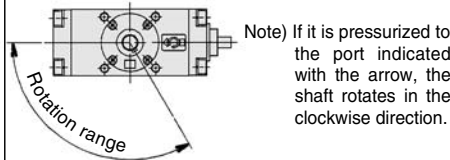


**Symbol: C45**

The rotation range and the angle adjusting direction of the angle adjustable style are changed.

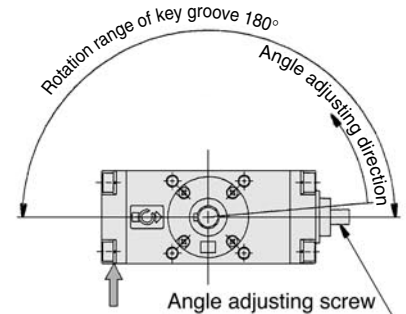


The rotation range under the adjustment of an angle at 120° is indicated below

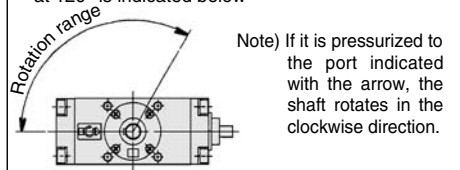


**Symbol: C46**

The rotation range and the angle adjusting direction of the angle adjustable style are changed.

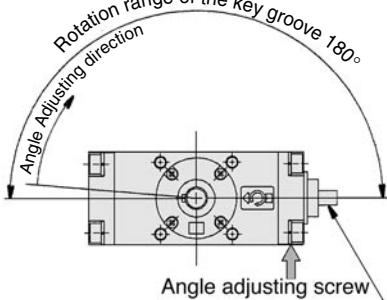

The rotation range under the adjustment of an angle at 120° is indicated below

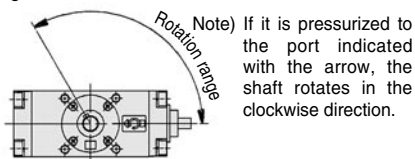

# Series CRA1

## Made to Order Specifications

### Change of Rotation Range and Angle Adjusting Direction Angle adjusting screw moved to the left /-XC47 to XC52

Consult SMC for further information on specifications, dimensions and delivery.

## 7 Change of rotation range and angle adjusting direction (Angle adjusting screw moved to the left) -XC47 to XC52

Symbols

CRA1 →Refer to the "How to Order" on p.4-197 —XC47

**Specification**

Applicable size	50, 63, 80, 100
Applicable shaft style	Shaft S, W, Y

• The rotation range and the angle adjusting direction are changed. (-XC47 to XC52)

The patterns with the rotation angle of 90° and 180° are applicable to the respective patterns with the rotation angles of 100° and 190° of the Made to order specification.

<p><b>Symbol: C47</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p> <p>The rotation range under the adjustment of an angle at 60° is indicated below</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C48</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p> <p>The rotating range under the adjustment of an angle at 60° is indicated below</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C49</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p> <p>The rotating range under the adjustment of an angle at 60° is indicated below</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>
<p><b>Symbol: C50</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p> <p>The rotation range under the adjustment of an angle at 60° is indicated below</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C51</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p> <p>The rotation range under the adjustment of an angle at 60° is indicated below</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C52</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p> <p>The rotation range under the adjustment of an angle at 60° is indicated below</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>





# Series CRA1 Made to Order Specifications

## Change of Rotation Range and Angle Adjusting Direction Angle adjusting screw moved to the left. /-XC53 to XC58

Consult SMC for further information on specifications, dimensions and delivery.

Symbols

**7** Change of rotation range and angle adjusting direction (Angle adjusting screw moved to the left) **-XC53 to XC58**













CRA1 →Refer to the "How to Order" on p.4-197 —XC53

**Specification**

Applicable size	50, 63, 80, 100
Applicable shaft style	Shaft S, W, Y

• The rotation range and the angle adjusting direction of the shaft are changed. (-XC53 to XC58)

The patterns with the rotation angle of 90° and 180° are applicable to the respective patterns with the rotation angles of 100° and 190° of the Made to order specification.
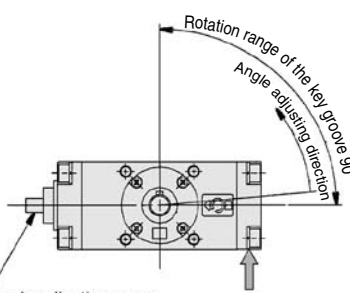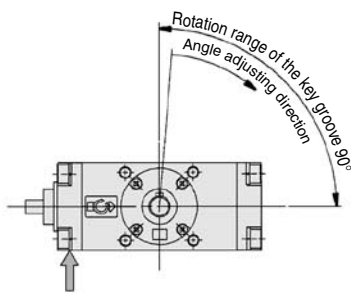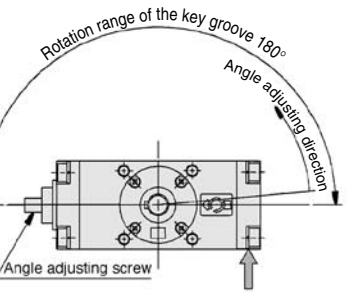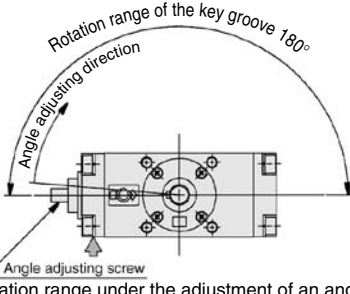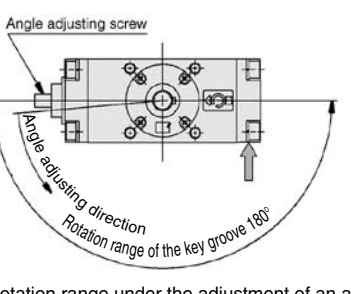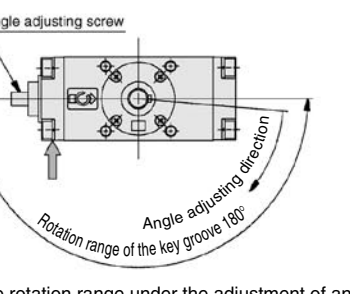
<p><b>Symbol: C53</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p>  <p>Rotation range of the key groove 90° Angle adjusting direction</p> <p>Angle adjusting screw</p> <p>The rotation range under the adjustment of an angle at 60° is indicated below.</p>  <p>Rotation range</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C54</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p>  <p>Rotation range of the key groove 90° Angle adjusting direction</p> <p>The rotation range under the adjustment of an angle at 60° is indicated below.</p>  <p>Rotation range</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C55</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p>  <p>Rotation range of the key groove 180° Angle adjusting direction</p> <p>Angle adjusting screw</p> <p>The rotation range under the adjustment of an angle at 120° is indicated below.</p>  <p>Rotation range</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>
<p><b>Symbol: C56</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p>  <p>Rotation range of the key groove 180° Angle adjusting direction</p> <p>Angle adjusting screw</p> <p>The rotation range under the adjustment of an angle at 120° is indicated below.</p>  <p>Rotation range</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C57</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p>  <p>Angle adjusting screw</p> <p>Angle adjusting direction Rotation range of the key groove 180°</p> <p>The rotation range under the adjustment of an angle at 120° is indicated below.</p>  <p>Rotation range</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>	<p><b>Symbol: C58</b></p> <p>For the angle adjusting style, angle adjusting screws are mounted to the left cover.</p>  <p>Angle adjusting screw</p> <p>Angle adjusting direction Rotation range of the key groove 180°</p> <p>The rotation range under the adjustment of an angle at 120° is indicated below.</p>  <p>Rotation range</p> <p>Note) If it is pressurized to the port indicated with the arrow, the shaft rotates in the clockwise direction.</p>

# Series **CRA1** **ALMOTION**

## Made to Order Specifications

### Change of Port Position (Size 30 to 100)/-XA59 to XA61

### Reverse Auto Switch Mounting (Size 50 to 100)/-XC62

Consult SMC for further information on specifications, dimensions and delivery.

Symbols

## 8 Change of port position (Mounting location of the cover is changed.) -XC59 to XC61

CRA1 →Refer to the "How to Order" on p.4-197 —XC59

**Specification** \*Except for the solenoid valve equipped style.

Applicable size 30, 50, 63, 80, 100

Applicable shaft style Shaft S, W, X, Y, Z, T, J, K



- Port position is changed. (-XC59 to -XC61)

The patterns with the rotation angle of 90° and 180° are applicable to the respective patterns with the rotation angles of 100° and 190° of the Made to order specification.

For the bumper equipped type, the needle position is on the opposite side of the port.



**Symbol: C59**

Direction of the port is changed. (upwards)





**Symbol: C60**

Direction of the port is changed. (downwards)



**Symbol: C61**

Direction of the port is changed. (backwards)




## 9 Reverse mounting of the auto switch against the standard -XC62

Symbol

CRA1 →Refer to the "How to Order" auto switch equipped type on p.4-185 —XC62

**Symbol: C62**

The auto switch is reverse mounted to the standard.



**Series CRA1** (Size 50 to 100)

**Made to Order Specifications**

**One Side Air-hydro, One Side Air Style/-XC63 to XC64**

Consult SMC for further information on specifications, dimensions and delivery.

**10** One side air-hydro, One side air style

Symbols

**-XC63, -XC64**

CRA1 →Refer to the "How to Order" on p.4-197 —XC63

**Specifications**

Applicable size	50, 63, 80, 100
Applicable shaft style	Shaft S, W, X, Y Z, T, J, K


\*Except for the solenoid valve equipped type, angle adjustable type and air cushion equipped type.

- One side air-hydro, One side air
- XC63: Left side air  
Right side air-hydro
- XC64: Left side air-hydro  
Right side air

The patterns with the rotation angle of 90°and 180° are applicable to the respective patterns with the rotation angles of 100°and 190° of the Made to order specification.

**Symbol: C63**


One side air, one side air-hydro specifications (Left side air, right side hydro)

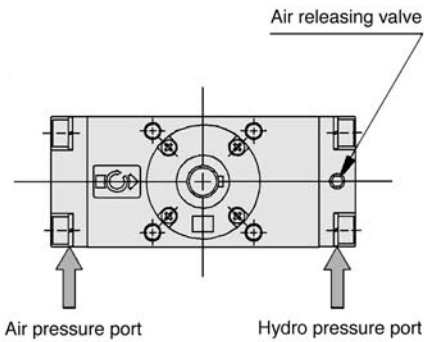

The figure shows the pressurized situation to the hydro pressure port.

**Symbol: C64**

One side air, one side air-hydro specifications (Left side hydro, right side air)

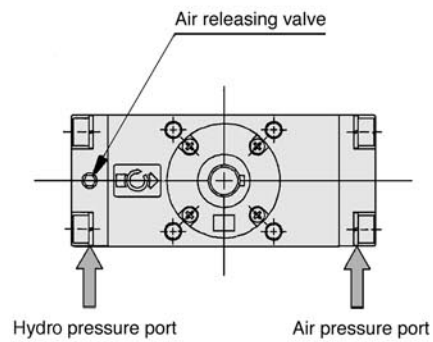

The figure shows the pressurized situation to the air pressure port.

**Series CRA1** (Size 30)

**Made to Order Specifications**

**Without Key Groove (Shaft Style Variations)/Shaft Style: T, J, K**

Consult SMC for further information on specifications, dimensions and delivery.

Symbols


**11**

Without key groove (Shaft style variations)

Shaft style: T, J, K



Refer to "How to Order" on p.4-176 for further information.

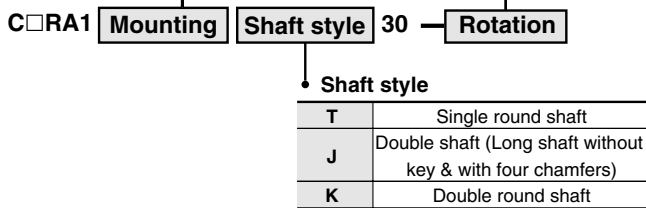

**Specifications**

Style	Pneumatic*
Size	<b>30</b>
Shaft style	Single round rod end (T), Double round rod end (K), Double rod end/(w/o long rod end key & with four chamfers) (J)
Cushion	Without cushion
Auto switch	Mountable
Mounting style	Basic, Foot

\*Refer to p.4-177 for other specifications.

**Dimensions**

(mm)

Shaft style	<b>T</b> (Single round shaft)	<b>J</b> (Double round shaft/Long shaft without key & with four chamfers)	<b>K</b> (Double round shaft)
Shape			

**Series CRA1** (Size 50 to 100)

**Made to Order Specifications**


**Without Key Groove (Shaft Style Variations)/Shaft Style: T, J, K**

Consult SMC for further information on specifications, dimensions and delivery.

**12 Without key groove (Shaft Variations)**

Symbols

**Shaft style: T, J, K**

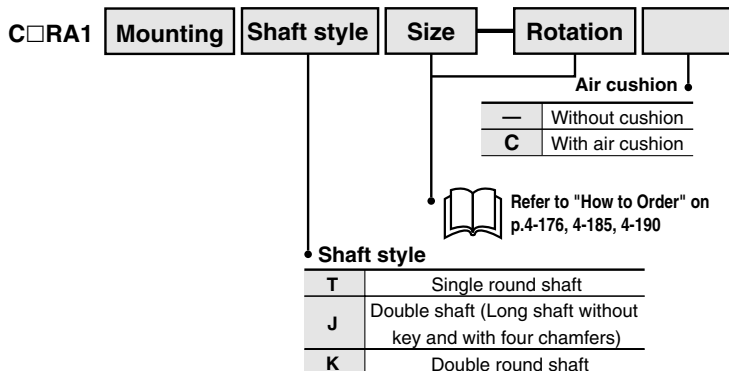

**Specifications**

Style	Pneumatic	Air-hydro
Size	50, 63, 80, 100	
Fluid	Air (Non-lube)	Hydric oil
Shaft style	Single round shaft (T), Double round shaft (K), Double shaft/Long shaft without key and with four chamfers (J)	
Cushion	Not attached	Not attached
Auto switch	Mountable	
Mounting style	Basic, Foot	



Note) Except for flange style.  
\*Refer to p.4-177 for other specifications.

**Dimensions**

(mm)

Shaft style	T(Single round shaft)		J(Double shaft/Long shaft without key & with four chamfers)					K(Double round shaft)		
Shape										
Size	D(g6)	H	D(g6)	H	M	N	UU	D(g6)	H	UU
50	15	36	15	36	20	15	118	15	36	134
63	17	41	17	41	22	17	139	17	41	158
80	20	50	20	50	25	20	167	20	50	192
100	25	60	25	60	30	25	202	25	60	232



\* Refer to p.4-182 and 4-183 for other specifications.

# Series **CRA1** (Size 30) Made to Order Specifications Shaft Variations/Shaft Style: S, X, Y, Z

Consult SMC for further information on specifications, dimensions and delivery.

## 13 Shaft variations

Symbols

Shaft style: S, X, Y, Z

C□RA1 **Mounting** **Shaft style** 30 **Rotation**



Refer to "How to Order" on p.4-176 and 4-185

**Shaft style**

<b>S</b>	Single shaft key
<b>X</b>	Single shaft with four chamfers
<b>Y</b>	Double shaft key
<b>Z</b>	Double shaft with four chamfers





Six shaft types other than standard shaft type W (Double shaft) of size 30 are made into patterns.

**Specifications**

Style	Pneumatic
Size	<b>30</b>
Max. operating pressure	1MPa
Min. operating pressure	0.1MPa
Shaft style	Single shaft key (S), Double shaft with four chamfers (X), Double shaft key (Y), Double shaft with four chamfers (Z)
Mounting	Basic, Foot
Auto switch	Mountable




\*Refer to p.4-177 for other specifications.

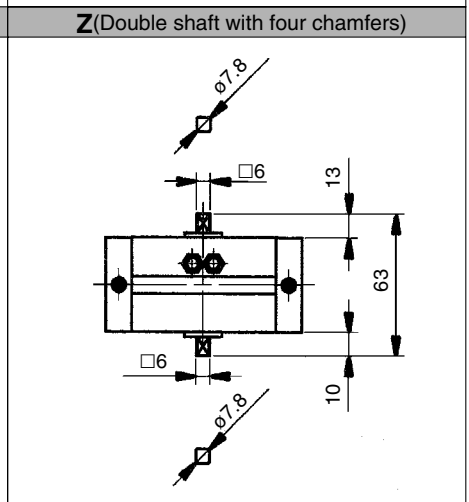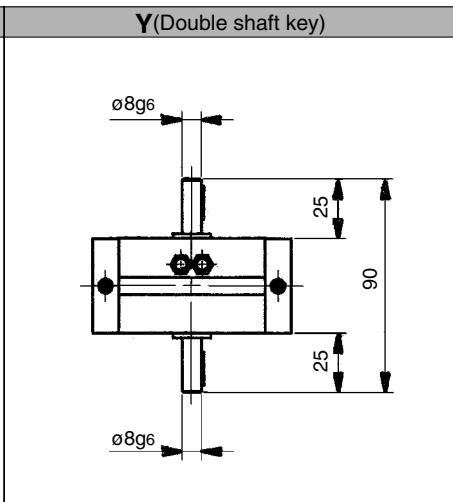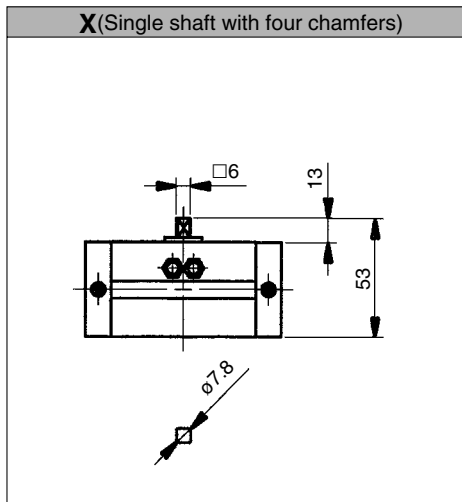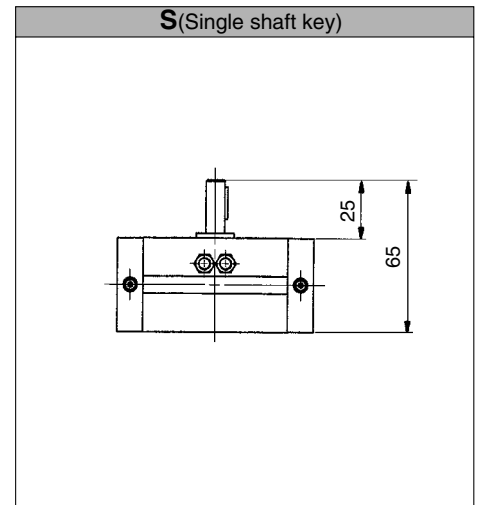

# Series CRA1 **ALMOTION** Made to Order Specifications Stainless Steel for Main Part/-X6 Heat Resistant Style/-X7

Consult SMC for further information on specifications, dimensions and delivery.

## 14 Stainless steel for main part **-X6**

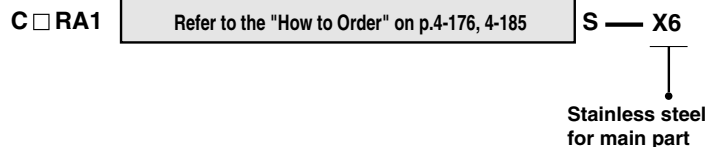

For applications in areas that pose a risk of rust or corrosion, a portion of the materials used in the standard parts has been changed to stainless steel.


### Specifications

Style	Pneumatic
Size	<b>30, 50, 63, 80, 100</b>
Fluid	Air (Non-lube)
Max. operating pressure	1MPa
Min. operating pressure	0.1MPa
Stainless steel part	Shaft, Bolt, Parallel key
Cushion	30—Without cushion 50 to 100—With or without air cushion
Auto switch	Mountable

\*Specifications other than indicated above are the same as that shown on p.4-177

\*\*Except for the angle adjustable style.

## 15 Heat resistant style **-X7**

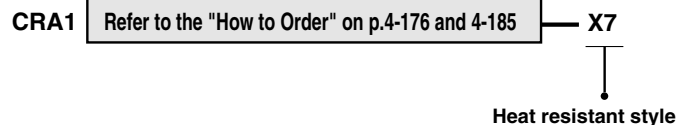

In this rotary actuator, the material of the seals has been changed to the heat resistant type (to withstand up to 100°C), for applications in environments that exceed the standard specification temperatures of 0 to 60°C.


### Specifications

Style	Pneumatic
Size	<b>30, 50, 63, 80, 100</b>
Rotation	90°, 180° (Size 30 to 100) 100°, 190° (Size 50 to 100)
Ambient and fluid temperature	0 to 100°C
Lubrication	ISO VG32
Seal material	Fluorine rubber
Shaft style	Single shaft, Double shaft, Single shaft with four chamfers, double shaft key, Double shaft four chamfers Double round shaft, Double shaft (Round shaft, With four chamfers), Double round shaft
Cushion	30 — Without cushion 50 to 100 —With or without air cushion
Auto switch	Not mountable

\*Specifications other than indicated above are the same as that shown on p.4-177

\*\*Except for models with solenoid valve.

## 16 Fluorine rubber seal **-X16**



Seal is now changed to fluoro rubber.

### Specifications

Style	Pneumatic
Size	<b>30, 50, 63, 80, 100</b>
Fluid	Air (No lubrication)
Max. operating pressure	1MPa
Min. operating pressure	0.1MPa
Ambient and fluid temperature	0°C to 60°C (No condensation)
Seal material	Fluorine rubber
Cushion	30 — Not equipped 50 to 100 — Note equipped, With air cushion
Auto switch	Mountable

\*Specifications other than indicated above are the same as that shown on p.4-177

\*\*Except for models with solenoid valve.

# Series CRA1 ALMOTION

## Made to Order Specifications


### Both Sides Angle Adjustable Style/-X10

### One Side Angle Adjustable, One Side Cushion Style/-X11

Consult SMC for further information on specifications, dimensions and delivery.


#### 17 Both sides angle adjustable Style -X10

Symbol

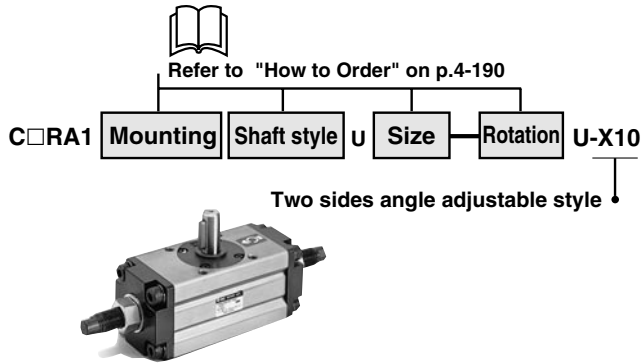

#### 18 One side angle adjustable, One side cushion style -X11

Symbol

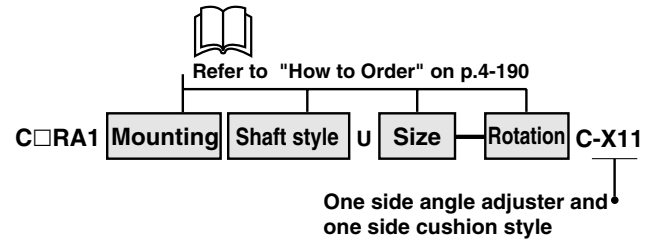

#### Specifications



Style	Pneumatic
Size	50, 63, 80, 100
Rotation	90°, 180°, 100°, 190°
Shaft style	Single shaft (S), Double shaft (W), Single shaft with four chamfers (X), Double shaft key (Y), Double shaft with four chamfers (Z), Single round shaft (T), Double shaft/Round shaft, four chamfers (J), Double round shaft (K)
Cushion	Without cushion
Variations	With auto switch, With solenoid valve

Refer to p.4-177 for other specifications.

#### Specifications

Type	Pneumatic
Size	50, 63, 80, 100
Rotation	90°, 180°, 100°, 190°
Shaft type	Single shaft (S), Double shaft (W), Single shaft with four chamfers (X), Double shaft key (Y), Double shaft with four chamfers (Z), Single round shaft (T), Double shaft/Round shaft, Four chamfers (J), Double round shaft (K)
Cushion	With cushion on one side
Auto switch	Mountable
Variations	With auto switch, With solenoid valve

Refer to p.4-177 for other specifications.

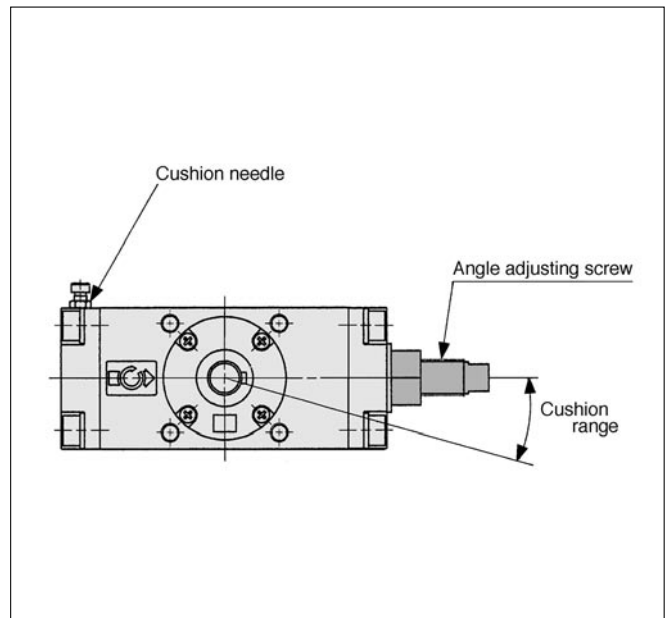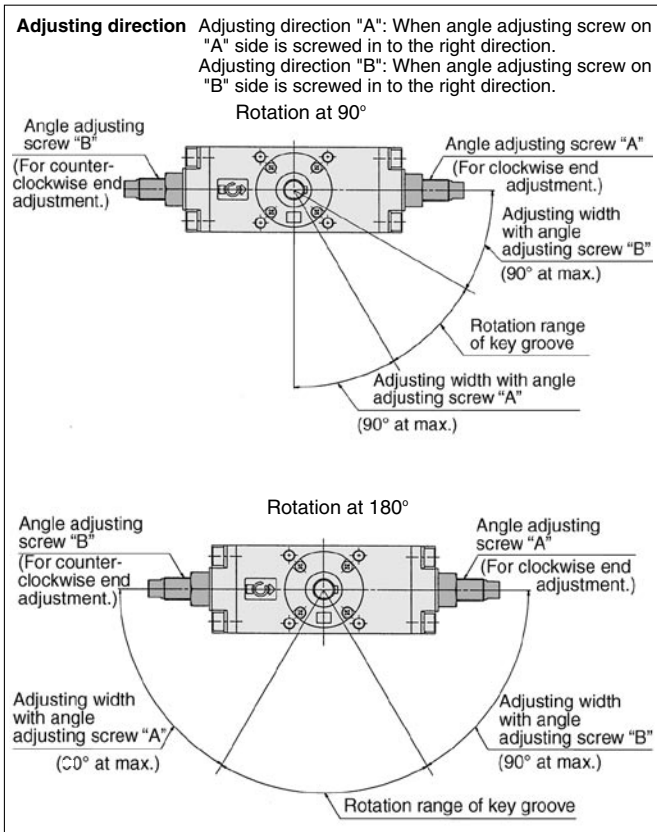

Refer to p.4-182 and 4-183 for dimensions.