

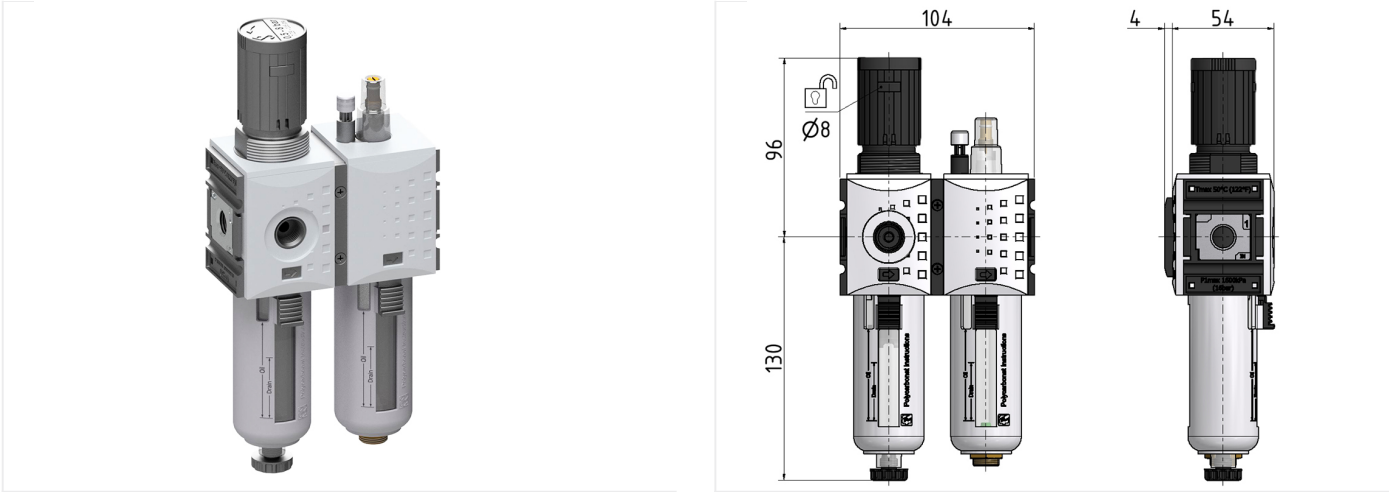


Service 2 unit of the Futura series

Service 2 unit G1/4 0,5-8 5µm with PC bowl, bowl guard and semi automatic drain

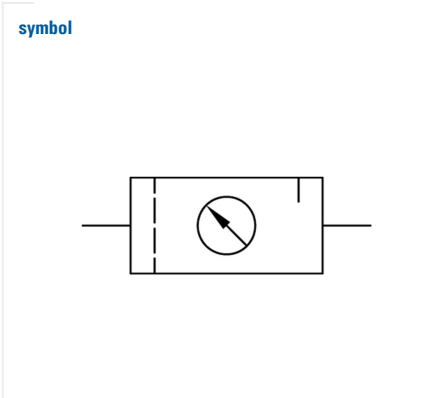

type	part-number	series	port size	flow rate	adjustment range P2 max.	weight
KS2U-114/8	029896	Futura	G 1/4	1750 l/min	8 bar	0.664 kg

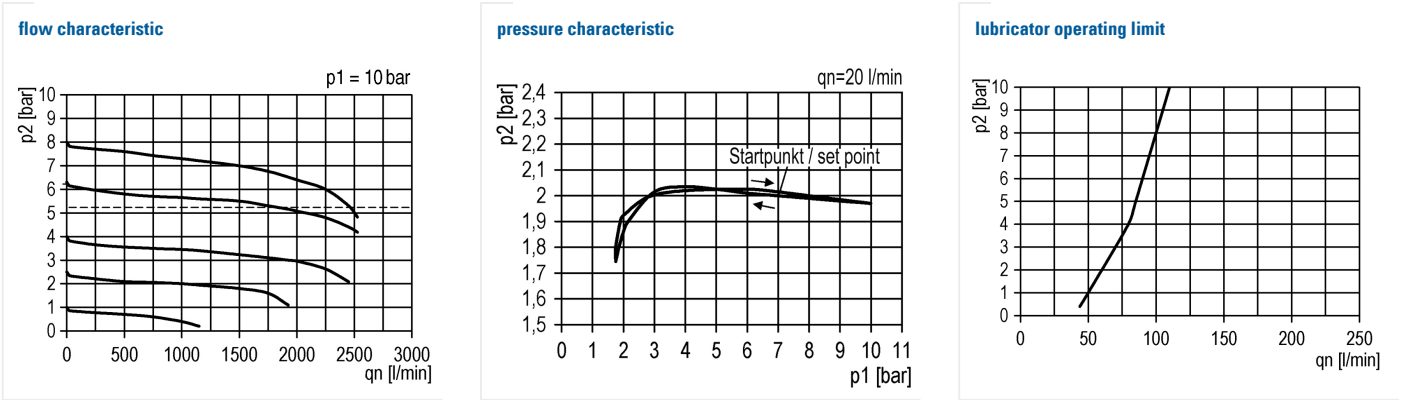

technical data


- **description:** sinter filter centrifugal principle, diaphragm-type pressure with relieving feature, lubricator with automatic oil filling
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 1,5 bar
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +50°C
- **bowl:** PC with PA bowl guard
- **drain:** HA
- **locking:** lockable setting knob
- **mounting:** vertical
- **filter element:** 5 µm
- **bowl volume lubricator:** 40 cm³
- **oil metering qv=1.000l/min:** 1 - 2 drops/min
- **oil type:** CL 32 DIN 51517 - ISO VG 32

accessories

- mounting bracket:
[KBW.1-1225](#)



- coupling kit wall mounting:
[KKOP.1W](#)



- control panel mounting:
[KBW.1-1227](#) + SM.1

- rotary lock: VH.31 without key or VH.32 with key