
EPF

Caged Ball LM Guide Finite stroke Model EPF

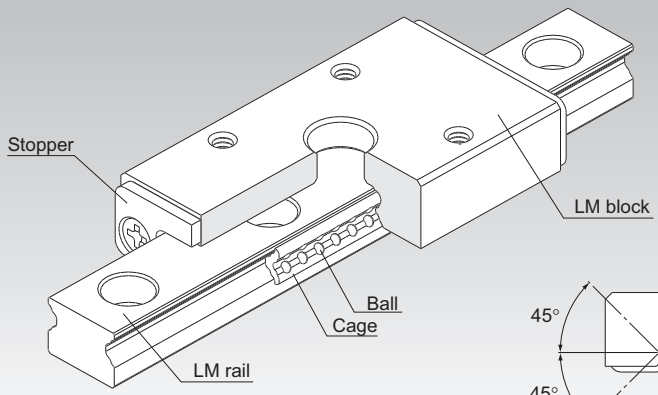

*For the ball cage, see A1-88.

Point of Selection A1-10
Point of Design A1-436
Options A1-459
Model No. A1-523
Precautions on Use A1-529
Accessories for Lubrication A24-1
Mounting Procedure and Maintenance B1-89

Equivalent moment factor A1-43
Rated Loads in All Directions A1-58
Equivalent factor in each direction A1-60
Radial Clearance A1-72
Accuracy Standards A1-85
Shoulder Height of the Mounting Base and the Corner Radius A1-447
Accuracy of the Mounting Surface A1-173
Dimensions of Each Model with an Option Attached A1-472

ALMOTION B.V. Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands t +31(0)85 0491 777 e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl

Structure and Features

Balls are held in cages with spherical ball holders and the balls roll in four rows of circular-arc grooves in raceways on precision-ground LM rails and LM blocks.

[Smooth motion]
Because a finite stroke is used, balls do not circulate and movement is smooth even with pre-loading. Also, because variations in rolling resistance are small, this model is ideal for locations where smooth movement is required with a short stroke.


[High Rigidity]
Because model EPF uses a DB construction featuring 4 rows of circular-arc grooves, it offers particularly high rigidity with respect to moment in the Mc direction. This makes it ideal for locations where Mc moment is applied with one rail.

[Miniature Type]
Because the mounting method is compatible with the Miniature LM Guide Model RSR-N, the models are dimensionally interchangeable.

[4-way Equal Load]
Each row of balls is configured at a contact angle of 45° so that the rated loads applied to the LM block are uniform in the all directions (radial, reverse radial and lateral directions), enabling the LM Guide to be used in all orientations and in extensive applications.

[Ball cage technology application 1]
Because the cage is formed out of plastic resin, there is no metal contact between the cage and the balls, providing excellent noise characteristics, low dust emissions and long product life.

[Ball cage technology application 2]
Forming the cage in a spherical shape out of plastic resin allows lubricant to be held in grease pockets, enabling long periods of maintenance-free operation.

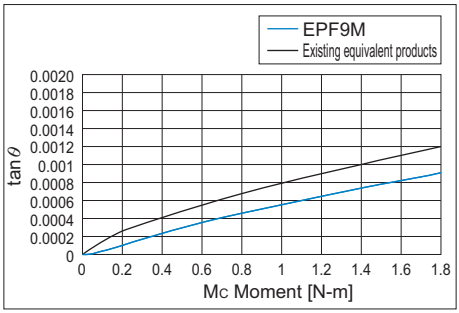

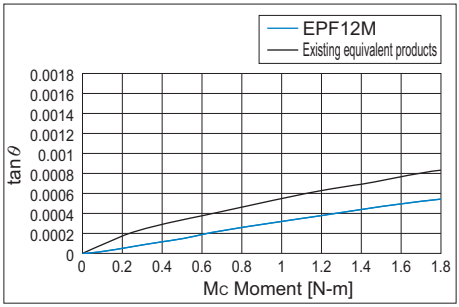
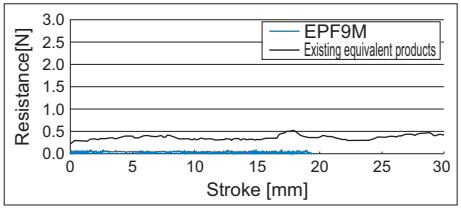


Fig.1 Comparison of Mc moment test data



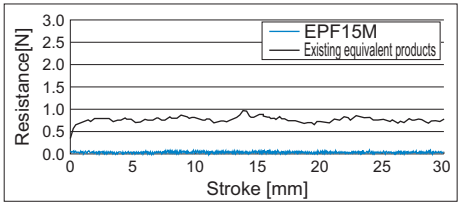



Fig.2 Comparison of rolling resistance test data

ALMOTION B.V. | Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands | t +31(0)85 0491 777 | e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl

Types and Features

Model EPF

Specification Table⇒A1-174

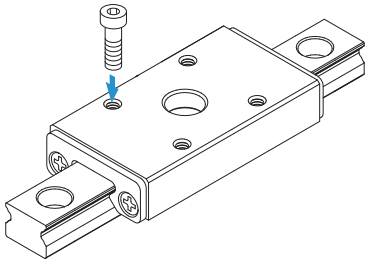

ALMOTION B.V. Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands t +31(0)85 0491 777 e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl

Accuracy of the Mounting Surface

If there is not sufficient precision in the LM rail and LM block mounting surfaces, the product may not function to its full potential.Table1 Machine to values no higher than those shown in... (Recommended value: 70% of Table1)


Table1 Flatness of the LM Rail and the LM Block Mounting Surface
Unit: mm

Model No.	Flatness error
EPF 7M, 9M	0.015/200
EPF 12M	0.025/200
EPF 15M	0.035/200

Note) It is recommended that highly rigid materials such as iron or cast metal be used as the mounting material. If a material with poor rigidity, such as aluminum, is used, unforeseen loading may be applied to the product. In such situations, contact THK.

ALMOTION B.V. | Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands t +31(0)85 0491 777 e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl

Model EPF



Model No.	Outer dimensions			LM block dimensions					LM rail dimensions		
	Height M	Width W	Length L_B	B	C	d_3	S×ℓ	L_{B1}	W_1	W_2	M_1
EPF 7M	8	17	31.6	12	13	5	M2×2.3	29.6	7	5	5
EPF 9M	10	20	37.8	15	16	7	M3×2.8	35.8	9	5.5	5
EPF 12M	13	27	43.7	20	20	7	M3×3.2	41.7	12	7.5	6.75
EPF 15M	16	32	56.5	25	25	7	M3×3.5	54.5	15	8.5	9

Note) The M in the model number symbol indicates that the LM block, LM rail and balls are made of stainless steel. The stainless steel provides excellent corrosion and environmental resistance.

Model number coding

EPF7M 16 +55L P M


- EPF7M: Model No.
- 16: Guaranteed stroke (in mm)
- +55L: LM rail length (in mm)
- P: Accuracy symbol (*1)
- M: Rail material: Stainless steel (standard)

(*1) See **A1-85**.

Note) This model number indicates that a single-rail unit constitutes one set.

Download data by searching for the corresponding model number on the Technical Support site. https://tech.thk.com

ALMOTION B.V. | Nijverheidsweg 14 | 6882 NG Est (Gld) | The Netherlands | t +31(0)85 0491 777 | e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl

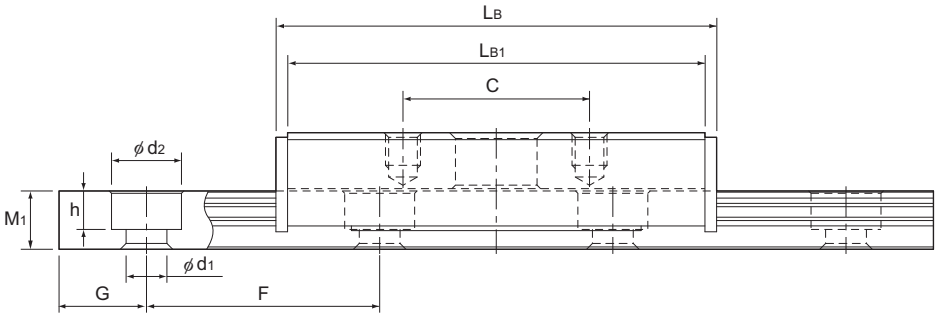

Unit: mm

				Guaranteed stroke	Basic load rating		Static permissible moment N•m*			Mass	
	G	F	$d_1 \times d_2 \times h$	S_T	C kN	C_0 kN	M_A	M_B	M_C	LM block kg	LM rail kg/m
	5	15	2.4×4.2×2.6	16	0.90	1.60	5.08	5.08	5.26	0.019	0.230
	7.5	20	3.5×6×3.3	21	1.00	1.87	6.81	6.81	7.89	0.036	0.290
	10	25	3.5×6×3.8	27	2.26	3.71	15.5	15.5	20.8	0.074	0.550
	15	40	3.5×6×4	34	3.71	5.88	33.0	33.0	41.3	0.136	0.940

Note) Static permissible moment*: Static permissible moment value with 1 LM block

Recommended Tightening Torques of Mounting Bolts

Unit: N-m

Model No.	Nominal bolt	Rated tightening torque		
		Iron	Casting	Aluminum
EPF 7M	M2	0.588	0.392	0.294
EPF 9M	M3	1.96	1.27	0.98
EPF 12M				
EPF 15M				

Table2 Maximum slip resistance

Unit: N

Model No.	Maximum slip resistance
EPF 7M	20
EPF 9M	20
EPF 12M	30
EPF 15M	30

Note) While the cage used to hold the balls is designed to operate extremely precisely, factors such as impacts or inertial moment or drive vibration from the machine can cause cage distortion.
If using the EPF LM guide in the following conditions, contact THK.
- Vertical Orientation
- Under a large moment load
- Butting the guide's external stopper with the table
- For applications involving high acceleration/deceleration

If cage distortion occurs, the cage must be forcibly restored to its original shape.
Table 1 shows the required slip resistance in this event. Set the thrust so that it is no less than the maximum value shown in the table.

Options⇒A1-459

ALMOTION B.V. Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands t +31(0)85 0491 777 e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl

Standard Length of the LM Rail

Table3 shows the standard LM rail lengths of model EPF.
For special rail lengths, it is recommended to use a value corresponding to the G dimension from the table. As the G dimension increases, this portion becomes less stable and the accuracy performance is severely impacted.

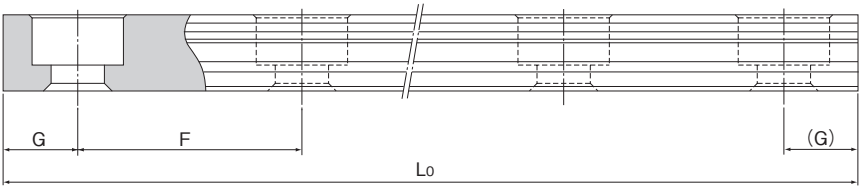


Table3 Standard Length of the LM Rail for Model EPF

Unit: mm

Model No.	EPF 7M	EPF 9M	EPF 12M	EPF 15M
LM rail standard length (L_0)	55	75	95	110
Standard pitch F	15	20	25	40
G	5	7.5	10	15

Note) Lengths other than the standard LM rail length (L_0) are also available. Contact THK for details.

ALMOTION B.V. Nijverheidsweg 14 | 6662 NG Elst (Gld) | The Netherlands t +31(0)85 0491 777 e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl