
MX

LM Guide Miniature Cross Guide Model MX

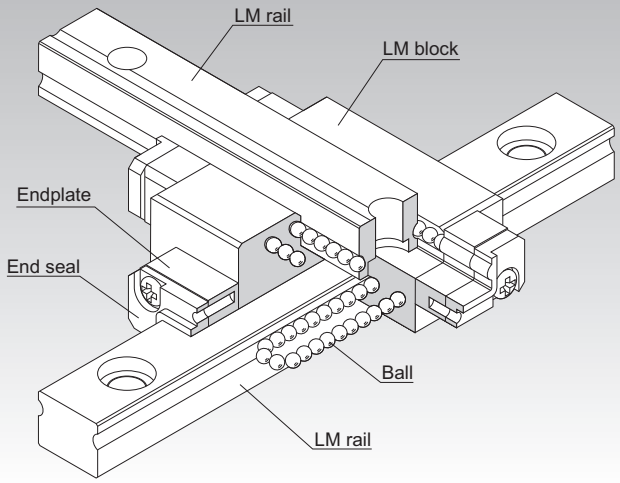

Point of Selection	**A1-10**
Point of Design	**A1-436**
Options	**A1-459**
Model No.	**A1-523**
Precautions on Use	**A1-529**
Accessories for Lubrication	**A24-1**
Mounting Procedure and Maintenance	**B1-89**

Equivalent moment factor	A1-43
Rated Loads in All Directions	A1-58
Equivalent factor in each direction	A1-60
Radial Clearance	A1-71
Accuracy Standards	A1-83
Shoulder Height of the Mounting Base and the Corner Radius	A1-446
Dimensions of Each Model with an Option Attached	A1-472

ALMOTION B.V. Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands t +31(0)85 0491 777 e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl

Structure and Features

Balls roll in two rows of raceways precision-ground on an LM rail and an LM block, and endplates incorporated in the LM block allow the balls to circulate. This model is an integral type of LM Guide that squares a unit of miniature LM Guide model RSR with another and uses two LM rails in combination. Since an orthogonal LM system with an extremely low height can be achieved with model MX alone, a conventionally required saddle is no longer necessary and the whole system can be downsized.

[4-way Equal Load]
Each row of balls is placed at a contact angle of 45° so that the rated loads applied to the LM block are uniform in the four directions (radial, reverse radial and lateral directions), enabling the LM Guide to be used in all orientations.


[Tapped-hole LM Rail Type]
There are two types of the LM rail: one designed to be mounted from the top with bolts, and a semi-standard type whose bottom face has tapped holes, allowing the rail to be mounted from the bottom.

Types and Features

Model MX


Specification Table⇒A1-302

MX is divided into two types: RSR5 cross type and RSR7W cross type.

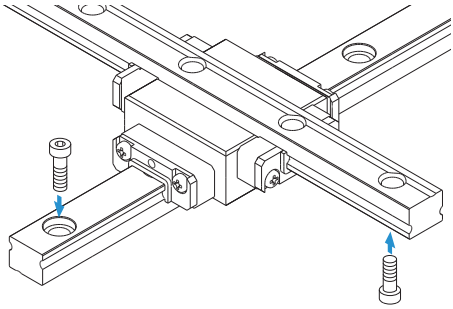

ALMOTION B.V. | Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands | t +31(0)85 0491 777 | e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl

Model MX

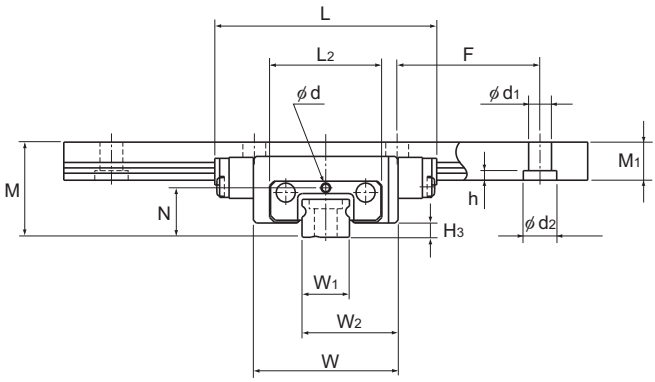

Model No.	Outer dimensions			LM block dimensions			
	Height M	Width W	Length L	L_2	N	Greasing hole d	H_3
MX 5M	10	15.2	23.3	11.8	5.2	0.8	1.5
MX 7WM	14.5	30.2	40.8	24.6	7.4	1.2	2

Model number coding

4 MX7W M UU C1 +120 / 100L P T M

- **4** — Total No. of LM blocks
- **MX7W M** — Model number
- **UU** — Contamination protection accessory symbol (*1)
- **C1** — Radial clearance symbol (*2)
  Normal (No symbol)
  Light preload (C1)
- **+120** — LM rail length on the X axis (in mm)
- **/ 100L** — LM rail length on the Y axis (in mm)
- **P** — Accuracy symbol (*3)
  Normal grade (No Symbol)/Precision grade (P)
- **T** — Symbol for LM rail jointed use
- **M** — LM rail is made of stainless steel

(*1) See contamination protection accessory on A1-496. (*2) See A1-71. (*3) See A1-83.


Note) If the LM rail mount of a semi-standard model is of a tapped-hole LM rail type, add symbol “K” after the accuracy symbol.

Example: 4 MX7W M UU C1+120/100L P K T M

Add symbol K

Download data by searching for the corresponding model number on the Technical Support site. https://tech.thk.com


ALMOTION B.V. Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands t +31(0)85 0491 777 e info@almotion.nl | www.almotion.nl | www.linearregeltechniek.nl | www.linearregeldingshop.nl | www.linearmotion.nl

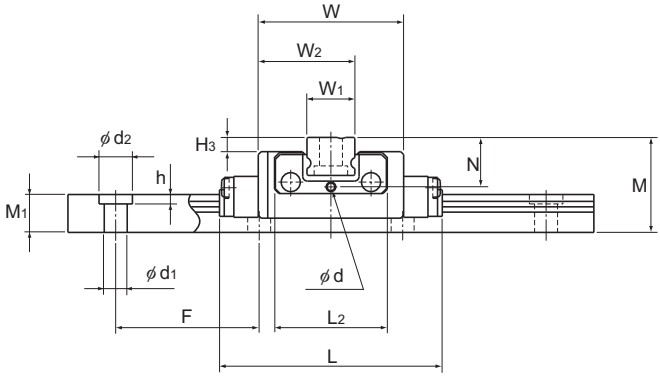


Unit: mm

	LM rail dimensions						Basic load rating		Static Permissible Moment* N-m		Mass	
	Width W_1	W_2	Height M_1	Pitch F	$d_1 \times d_2 \times h$	Length* Max	C kN	C_0 kN	M_0	M_B	LM block kg	LM rail kg/m
	5 $^{0}_{-0.02}$	10.1	4	15	2.4×3.5×1	200	0.59	1.1	2.57	2.57	0.01	0.14
	14 $^{0}_{-0.025}$	22.1	5.2	30	3.5×6×3.2	400	2.04	3.21	14.7	14.7	0.051	0.51

Note) The maximum length under "Length*" indicates the standard maximum length of an LM rail. (See A1-304.)
Static permissible moment* 1 block: the static permissible moment with one LM block
Total block length L : The total block length L shown in the table is the length with the dust-proof parts (code: UU).
The M in the model number symbol indicates that the LM block, LM rail and balls are made of stainless steel.
The stainless steel provides excellent corrosion and environmental resistance.
Please be aware that balls will fall out if the LM block is removed from the LM rail.

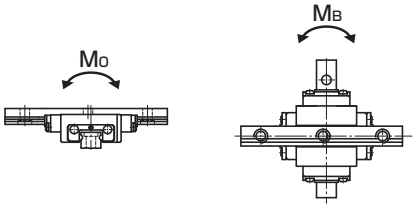

For the LM rail mounting hole, a tapped-hole LM rail type is available as semi-standard.

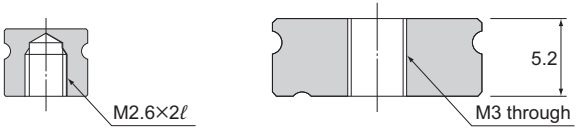

Model MX5M Model MX7WM

When mounting the LM rail of model MX7WM, take into account the thread length of the mounting bolt in order not to let the bolt end stick out of the top face of the LM rail.

Options⇒A1-459

ALMOTION B.V. Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands t +31(0)85 0491 777 e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl

Standard Length and Maximum Length of the LM Rail

Table1 shows the standard lengths and the maximum lengths of model MX variations.

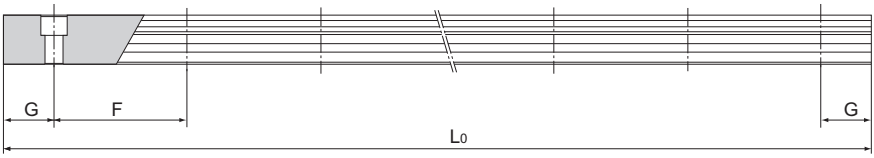


Table1 Standard Length and Maximum Length of the LM Rail for Model MX

Unit: mm

Model No.	MX 5	MX 7W
LM rail standard length (L_0)	40 55 70 100 130 160	50 80 110 140 170 200 260 290
Standard pitch F	15	30
G	5	10
Max length	480	480

Note) The maximum length varies with accuracy grades. Contact THK for details.

ALMOTION B.V. | Nijverheidsweg 14 | 6862 NG Elst (Gld) | The Netherlands t +31(0)85 0491 777 e info@almotion.nl | www.almotion.nl | www.lineairegeleiding.nl | www.lineairegeleidingshop.nl | www.linearmotion.nl