


• FLANSCHWAGEN RA-EM UND RA-GM

Verschiedene Beschichtungsvarianten auf Anfrage.

Standard: hohe Vorspannung.

Details zu den Schienen siehe Seite 70.

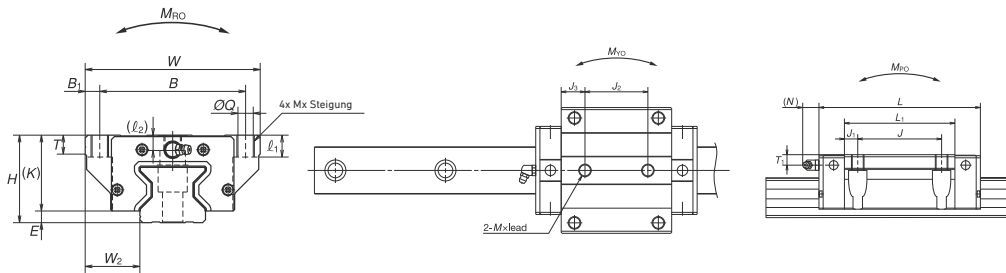

| Artikel | H | W | L | B | J | E | W2 | J2 | M x Steigung x ℓ | Q x ℓ | B1 | L1 | J1 | J3 | K | T | Schmieranschluß | T1 | N | Tragzahlen | | Momente | | | Gewicht/Wagen | | |
|---------|----|-----|-------|-----|-----|-----|------|----|-----------------------|---------------|-----|-------|-------|-------|------|----|-----------------|----|----|------------|-------------------------|-----------------|-----------------|-----------------|---------------|-------|-------|
| | | | | | | | | | | | | | | | | | | | | dyn. (C) | stat. (C ₀) | M _{R0} | M _{P0} | M _{Y0} | | | |
| | | | | | | | | | | | | | | | | | | | | [mm] | | [N] | | [Nm] | | | [kg] |
| RAA25EM | 36 | 70 | 97,5 | 57 | 45 | 5 | 23,5 | 40 | M8x1,25x10 (11) | 6,8x10(11) | 6,5 | 65,5 | 10,25 | 12,75 | 31 | 11 | M6x0,75 | 6 | 11 | 29200 | 72700 | 970 | 760 | 760 | 0,8 | | |
| RAA25GM | | | 115,5 | | | | | | | | | 83,5 | 19,25 | 21,75 | | | | | | 35,5 | 11 | 6 | 35400 | 92900 | 1240 | 1240 | 1240 |
| RAA30EM | 42 | 90 | 110,8 | 72 | 52 | 6,5 | 31 | 44 | M10x1,5x12 (12,5) | 8,6x12(12,5) | 9 | 74 | 11 | 15 | 35,5 | 11 | M6x0,75 | 7 | 11 | 38900 | 93500 | 1670 | 1140 | 1400 | 1,3 | | |
| RAA30GM | | | 135,4 | | | | | | | | | 98,6 | 23,3 | 27,3 | | | | | | 41,5 | 11 | 7 | 47600 | 121000 | 2170 | 1950 | 1950 |
| RAA35EM | 48 | 100 | 123,8 | 82 | 62 | 6,5 | 33 | 52 | M10x1,5x13 (7) | 8,6x13(7) | 9 | 83,2 | 10,6 | 15,6 | 41,5 | 12 | M6x0,75 | 8 | 11 | 53300 | 129000 | 2810 | 1800 | 1800 | 1,7 | | |
| RAA35GM | | | 152 | | | | | | | | | 111,4 | 24,7 | 29,7 | | | | | | 45,5 | 12 | 8 | 67400 | 175000 | 3810 | 3250 | 3250 |
| RAA45EM | 60 | 120 | 154 | 100 | 80 | 8 | 37,5 | 60 | M12x1,75x15 (10,5) | 10,5x15(10,5) | 10 | 105,4 | 12,7 | 22,7 | 52 | 13 | Rc1/8 | 10 | 14 | 92800 | 229000 | 6180 | 4080 | 4080 | 3,2 | | |
| RAA45GM | | | 190 | | | | | | | | | 141,4 | 30,7 | 40,7 | | | | | | 55,5 | 13 | 10 | 116000 | 305000 | 8240 | 7150 | 7150 |
| RAA55EM | 70 | 140 | 184 | 116 | 95 | 9 | 43,5 | 70 | M14x2x18(13) | 12,5x18(13) | 12 | 128 | 16,5 | 29 | 61 | 15 | Rc1/8 | 11 | 14 | 129000 | 330000 | 10200 | 7060 | 7060 | 5,4 | | |
| RAA55GM | | | 234 | | | | | | | | | 178 | 41,5 | 54 | | | | | | 65,5 | 15 | 11 | 168000 | 462000 | 14300 | 13600 | 13600 |
| RAA65EM | 90 | 170 | 228,4 | 142 | 110 | 13 | 53,5 | 82 | M16x2x24 (18,5) | 14,6x24(18,5) | 14 | 155,4 | 22,7 | 36,7 | 77 | 22 | Rc1/8 | 19 | 14 | 210000 | 504000 | 19200 | 12700 | 12700 | 12,2 | | |
| RAA65GM | | | 302,5 | | | | | | | | | 229,5 | 59,75 | 73,75 | | | | | | 81,5 | 22 | 19 | 288000 | 756000 | 28700 | 28600 | 28600 |

RAA - 30 - EM - K

BAUGRÖSSE

WAGENLÄNGE
EM Normal
GM Lang

ZUBEHÖRCODE
ohne Standard
K mit K1-Schmiersystem