

# STAINLESS STEEL

## standard fittings



Find out our  
key products



**Solution for most applications**



**Easy and intuitive choice**



**Excellent value for money**



**Wide availability**



**Fast delivery**



## Stainless Steel standard fittings

## Main features and certifications

Stainless Steel standard fittings. Available in different configurations and threads.  
Supplied conforming to Reach and RoHS directives.



## Series AX

from page 5.308.10



Stainless Steel AISI 316 standard fittings. Available in different configurations, with taper BSPT threads and BSP threads, in various sizes, from 1/8" up to 4".

# Stainless Steel standard fittings

Series AX



## Code key

Series	Type*	Thread 1*	Thread 2*
<b>AX</b>	<b>002</b>	<b>12</b>	<b>14</b>
AX	002, 004, 006, 007, 010, 013, 015, 016, 021, 022, 023, 026, 027, 028, 029, 030, 031, 032, 033, 034	18 = 1/8" 14 = 1/4" 38 = 3/8" 12 = 1/2" 34 = 3/4" 01 = 1"	41 = 1 1/4" 21 = 1 1/2" 02 = 2" 22 = 2 1/2" 03 = 3" 04 = 4"

## How to order

Series	Type	Ø Tube	Thread
<b>AX</b>	<b>002</b>	<b>12</b>	<b>14</b>

## Notes


\*For matching between fitting type and thread, see from page 5.308.11; for the specific type, see the following pages.

For standard materials see the table below

## Technical data

Version	Series AX
Fluid	Compressed air, aggressive fluids, low pressure oil
Maximum pressure	0 ÷ 60 bar
Temperature range	-40°C ÷ +250°C
Taper threads	UNI EN 10226-1 (BSPT)

## Standard materials

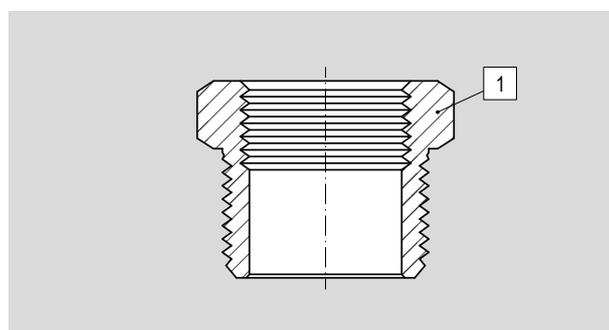

Position	Description	Material
1	Body	Stainless Steel AISI 316

# Stainless Steel standard fittings

Series AX

Fittings series AX

Type			Taper threads (BSPT)	Parallel threads (BSP)	Stem Ø mm	Data sheet and code page
AX002	M/F reducer		1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2 1/2", 3"	-	5.308.12
AX004	M/F increaser		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2"	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2"	-	5.308.13
AX006	BSPT nipple		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	-	5.308.12
AX027	BSPT reducing nipple		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	-	5.308.14
AX028	Threaded nipple		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	-	5.308.14
AX029	Solder fitting		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3", 4"	-	-	5.308.15
AX030	BSPT extended nipple		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	-	5.308.15
AX007	Female socket		-	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3", 4"	-	5.308.16
AX031	Female reducing socket		-	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	5.308.16
AX016	Male BSPT plug		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	-	5.308.17
AX010	Female plug		-	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	5.308.17
AX013	Nut		-	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	5.308.18
AX015	BSPT hose adapter		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2"	-	7, 8, 10, 14,5, 20, 25, 32, 40, 52	5.308.18
AX032	BSP F/F union		-	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	5.308.19
AX033	M/F union		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2"	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2"	-	5.308.19
AX034	BSP 45° F/F elbow		-	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	5.308.20
AX021	F/F elbow		-	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	5.308.20
AX022	M/F elbow		1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	5.308.21
AX023	F/F/F tee		-	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"	-	5.308.21
AX026	F/F/F/F +		-	1/8", 1/4", 3/8", 1/2", 3/4", 1", 1-1/4", 1-1/2", 2"	-	5.308.22


5.308.11

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX002	M/F reducer. In AISI 316 Stainless Steel.

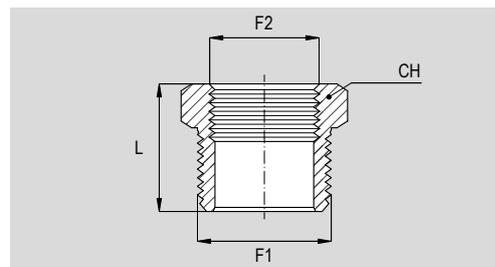


## Dimensions

Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	CH	Weight (g)
026161	AX002 14 18	R1/4"	G1/8"	18	14	-
026163	AX002 38 18	R3/8"	G1/8"	20	17	-
026162	AX002 38 14	R3/8"	G1/4"	20	17	-
026165	AX002 12 38	R1/2"	G3/8"	23	22	-
026164	AX002 12 14	R1/2"	G1/4"	23	22	-
026166	AX002 34 38	R3/4"	G3/8"	27	27	-
026167	AX002 34 12	R3/4"	G1/2"	27	27	-
026168	AX002 01 12	R1"	G1/2"	30	36	-
026169	AX002 01 34	R1"	G3/4"	30	36	-
026170	AX002 41 34	R1 1/4"	G3/4"	31	42	-
026171	AX002 41 01	R1 1/4"	G1"	31	42	-
026172	AX002 21 01	R1 1/2"	G1"	33	50	-
026173	AX002 21 41	R1 1/2"	G1 1/4"	33	50	-
026174	AX002 02 41	R2"	G1 1/4"	37	60	-
026175	AX002 02 21	R2"	G1 1/2"	37	60	-
026176	AX002 22 21	R2 1/2"	G1 1/2"	43	77	-
026177	AX002 22 02	R2 1/2"	G2"	43	77	-
026178	AX002 03 02	R3"	G2"	48	90	-
026179	AX002 03 22	R3"	G2 1/2"	48	90	-

## Main features

Type	Description
AX006	BSPT nipple. In AISI 316 Stainless Steel.

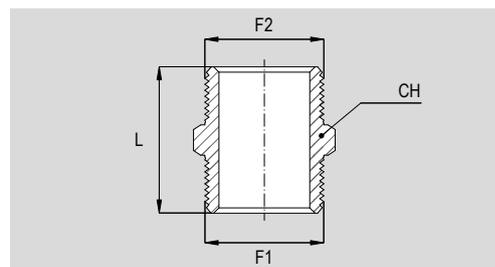

## Dimensions


Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	CH	Weight (g)
026131	AX006 18 18	R1/8"	R1/8"	24	12	-
026132	AX006 14 14	R1/4"	R1/4"	29	14	-
026133	AX006 38 38	R3/8"	R3/8"	32	17	-
026134	AX006 12 12	R1/2"	R1/2"	38	22	-
026135	AX006 34 34	R3/4"	R3/4"	45	27	-
026136	AX006 01 01	R1"	R1"	47	36	-
026137	AX006 41 41	R1 1/4"	R1 1/4"	52	42	-
026138	AX006 21 21	R1 1/2"	R1 1/2"	55	50	-
026139	AX006 02 02	R2"	R2"	62	60	-
026140	AX006 22 22	R2 1/2"	R2 1/2"	71	77	-
026141	AX006 03 03	R3"	R3"	82	90	-

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX004	M/F increaser. In AISI 316 Stainless Steel.

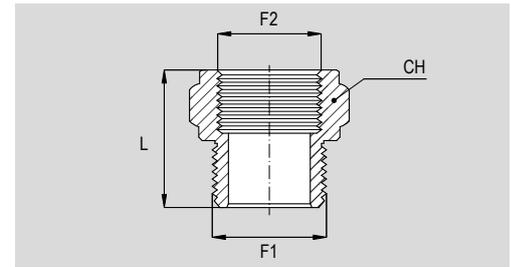

## Dimensions


Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	CH	Weight (g)
026251	AX004 18 18	R1/8"	G1/8"	21	17	-
026252	AX004 14 18	R1/4"	G1/8"	24	19	-
026253	AX004 14 14	R1/4"	G1/4"	27	19	-
026254	AX004 38 18	R3/8"	G1/8"	25	24	-
026255	AX004 38 14	R3/8"	G1/4"	28	24	-
026256	AX004 38 38	R3/8"	G3/8"	31	24	-
026257	AX004 12 14	R1/2"	G1/4"	30	30	-
026258	AX004 12 38	R1/2"	G3/8"	33	30	-
026259	AX004 12 12	R1/2"	G1/2"	40	24	-
026260	AX004 34 14	R3/4"	G1/4"	31	36	-
026261	AX004 34 38	R3/4"	G3/8"	34	36	-
026262	AX004 34 12	R3/4"	G1/2"	35	36	-
026263	AX004 34 34	R3/4"	G3/4"	37	36	-
026264	AX004 01 38	R1"	G3/8"	37	41	-
026265	AX004 01 12	R1"	G1/2"	38	41	-
026266	AX004 01 34	R1"	G3/4"	40	41	-
026267	AX004 01 01	R1"	G1"	41	41	-
026268	AX004 41 34	R1 1/4"	G3/4"	40	50	-
026269	AX004 41 01	R1 1/4"	G1"	41	50	-
026270	AX004 41 41	R1 1/4"	G1 1/4"	44	50	-
026271	AX004 21 34	R1 1/2"	G3/4"	43	55	-
026272	AX004 21 01	R1 1/2"	G1"	44	55	-
026273	AX004 21 41	R1 1/2"	G1 1/4"	47	55	-
026274	AX004 21 41	R1 1/2"	G1 1/2"	53	55	-

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX027	BSPT reducing nipple. In AISI 316 Stainless Steel.

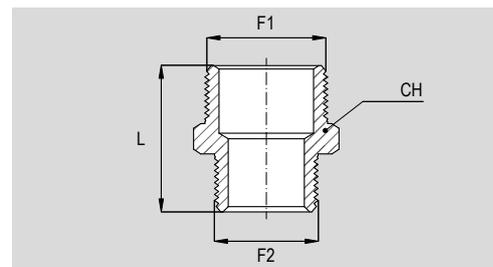


## Dimensions

Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	CH	Weight (g)
026091	AX027 14 18	R1/4"	R1/8"	27	14	-
026092	AX027 38 14	R3/8"	R1/4"	31	17	-
026093	AX027 12 14	R1/2"	R1/4"	34	22	-
026094	AX027 12 38	R1/2"	R3/8"	35	22	-
026095	AX027 34 38	R3/4"	R3/8"	38	27	-
026096	AX027 34 12	R3/4"	R1/2"	42	27	-
026097	AX027 01 12	R1"	R1/2"	45	36	-
026098	AX027 01 34	R1"	R3/4"	48	36	-
026099	AX027 41 34	R1 1/4"	R3/4"	49	42	-
026100	AX027 41 01	R1 1/4"	R1"	51	42	-
026101	AX027 21 01	R1 1/2"	R1"	53	50	-
026102	AX027 21 41	R1 1/2"	R1 1/4"	54	50	-
026103	AX027 02 41	R2"	R1 1/4"	58	60	-
026104	AX027 02 21	R2"	R1 1/2"	59	60	-
026105	AX027 22 21	R2 1/2"	R1 1/2"	67	77	-
026106	AX027 22 02	R2 1/2"	R2"	70	77	-
026107	AX027 03 22	R3"	R2 1/2"	78	90	-

## Main features

Type	Description
AX028	Threaded nipple. In AISI 316 Stainless Steel.

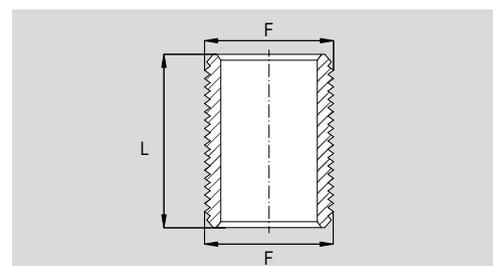

## Dimensions


Code	Item	F (Thread)	L	Weight (g)
026001	AX028 18 18	R1/8"	16	-
026002	AX028 14 14	R1/4"	18	-
026003	AX028 38 38	R3/8"	22	-
026004	AX028 12 12	R1/2"	25	-
026005	AX028 34 34	R3/4"	30	-
026006	AX028 01 01	R1"	35	-
026007	AX028 41 41	R1 1/4"	38	-
026008	AX028 21 21	R1 1/2"	38	-
026009	AX028 02 02	R2"	45	-
026010	AX028 22 22	R2 1/2"	55	-
026011	AX028 03 03	R3"	60	-

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX029	Solder fitting. In AISI 316 Stainless Steel.

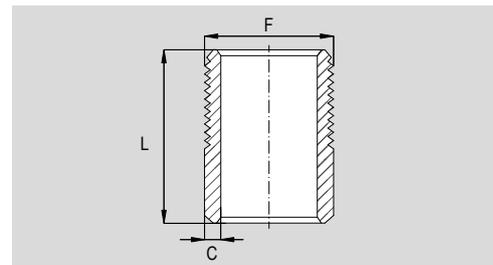


## Dimensions

Code	Item	F (Thread)	L	C	Weight (g)
026031	AX029 18 18	R1/8"	20	2,24	-
026032	AX029 14 14	R1/4"	22	2,24	-
026033	AX029 38 38	R3/8"	25	2,31	-
026034	AX029 12 12	R1/2"	28	2,90	-
026035	AX029 34 34	R3/4"	35	2,90	-
026036	AX029 01 01	R1"	35	3,38	-
026037	AX029 41 41	R1 1/4"	45	3,56	-
026038	AX029 21 21	R1 1/2"	45	3,68	-
026039	AX029 02 02	R2"	50	3,91	-
026040	AX029 22 22	R2 1/2"	55	6,30	-
026041	AX029 03 03	R3"	65	4	-
026042	AX029 04 04	R4"	75	4,5	-

## Main features

Type	Description
AX030	BSPT extended nipple. In AISI 316 Stainless Steel.

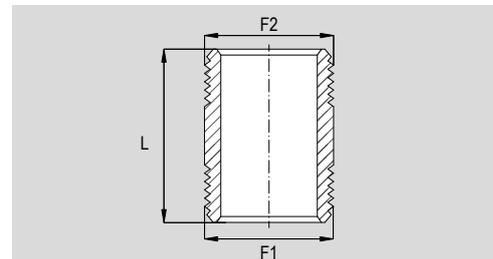

## Dimensions

Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	Weight (g)
026061	AX030 18 18	R1/8"	R1/8"	30	-
026062	AX030 14 14	R1/4"	R1/4"	36	-
026063	AX030 38 38	R3/8"	R3/8"	42	-
026064	AX030 12 12	R1/2"	R1/2"	45	-
026065	AX030 34 34	R3/4"	R3/4"	53	-
026066	AX030 01 01	R1"	R1"	60	-
026067	AX030 41 41	R1 1/4"	R1 1/4"	66	-
026068	AX030 21 21	R1 1/2"	R1 1/2"	67	-
026069	AX030 02 02	R2"	R2"	75	-
026070	AX030 22 22	R2 1/2"	R2 1/2"	85	-
026071	AX030 03 03	R3"	R3"	90	-


5 - STAINLESS STEEL COMPONENTS

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX007	Female socket. In AISI 316 Stainless Steel.

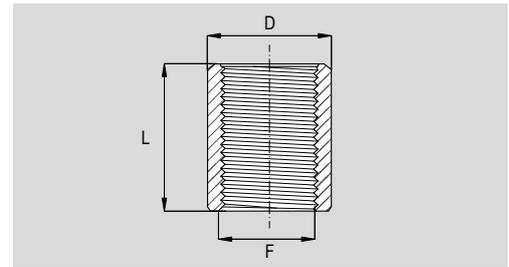


## Dimensions

Code	Item	F (Thread)	L	D	Weight (g)
026511	AX007 18 18	G1/8"	20	14	-
026512	AX007 14 14	G1/4"	22	17,2	-
026513	AX007 38 38	G3/8"	25	21,3	-
026514	AX007 12 12	G1/2"	30	26,7	-
026515	AX007 34 34	G3/4"	35	33,4	-
026516	AX007 01 01	G1"	37	40	-
026517	AX007 41 41	G1 1/4"	42	48,3	-
026518	AX007 21 21	G1 1/2"	42	57	-
026519	AX007 02 02	G2"	46	71	-
026520	AX007 22 22	G2 1/2"	65	90	-
026521	AX007 03 03	G3"	70	100	-
026522	AX007 04 04	G4"	70	120	-

## Main features

Type	Description
AX031	Female reducing socket. In AISI 316 Stainless Steel.

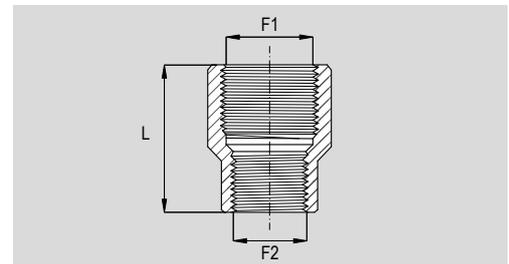

## Dimensions


Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	Weight (g)
026541	AX031 14 18	G1/4"	G1/8"	27	-
026542	AX031 38 14	G3/8"	G1/4"	30	-
026543	AX031 12 14	G1/2"	G1/4"	36	-
026544	AX031 12 38	G1/2"	G3/8"	36	-
026545	AX031 34 38	G3/4"	G3/8"	39	-
026546	AX031 34 12	G3/4"	G1/2"	39	-
026547	AX031 01 12	G1"	G1/2"	45	-
026548	AX031 01 34	G1"	G3/4"	45	-
026549	AX031 41 34	G1 1/4"	G3/4"	50	-
026550	AX031 41 01	G1 1/4"	G1"	50	-
026551	AX031 21 01	G1 1/2"	G1"	55	-
026552	AX031 21 41	G1 1/2"	G1 1/4"	55	-
026553	AX031 02 41	G2"	G1 1/4"	65	-
026554	AX031 02 21	G2"	G1 1/2"	65	-
026555	AX031 22 21	G2 1/2"	G1 1/2"	74	-
026556	AX031 22 02	G2 1/2"	G2"	74	-
026557	AX031 03 02	G3"	G2"	80	-
026558	AX031 03 22	G3"	G2 1/2"	80	-

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX016	Male BSPT plug. In AISI 316 Stainless Steel.

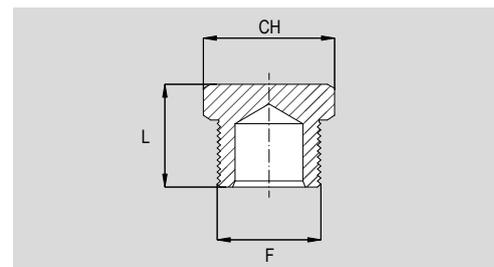


## Dimensions

Code	Item	F (Thread)	L	CH	Weight (g)
026191	AX016 18 18	R1/8"	15	12	-
026192	AX016 14 14	R1/4"	17	14	-
026193	AX016 38 38	R3/8"	18	17	-
026194	AX016 12 12	R1/2"	20	22	-
026195	AX016 34 34	R3/4"	25	27	-
026196	AX016 01 01	R1"	28	36	-
026197	AX016 41 41	R1 1/4"	31	42	-
026198	AX016 21 21	R1 1/2"	33	50	-
026199	AX016 02 02	R2"	38	60	-
026200	AX016 22 22	R2 1/2"	43	77	-
026201	AX016 03 03	R3"	48	90	-

## Main features

Type	Description
AX010	Female plug. In AISI 316 Stainless Steel.

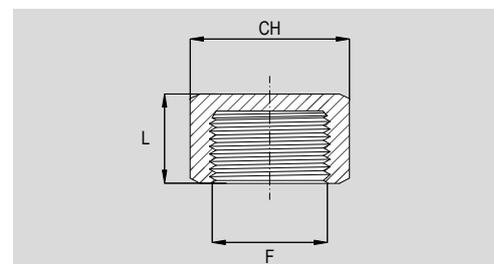

## Dimensions

Code	Item	F (Thread)	L	CH	Weight (g)
026671	AX010 18 18	G1/8"	13	17	-
026672	AX010 14 14	G1/4"	15	19	-
026673	AX010 38 38	G3/8"	16	24	-
026674	AX010 12 12	G1/2"	18	30	-
026675	AX010 34 34	G3/4"	21	36	-
026676	AX010 01 01	G1"	24	41	-
026677	AX010 41 41	G1 1/4"	24	50	-
026678	AX010 21 21	G1 1/2"	24	55	-
026679	AX010 02 02	G2"	26	68	-
026680	AX010 22 22	G2 1/2"	30	84	-
026681	AX010 03 03	G3"	30	98	-


5 - STAINLESS STEEL COMPONENTS

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX013	Nut. In AISI 316 Stainless Steel.

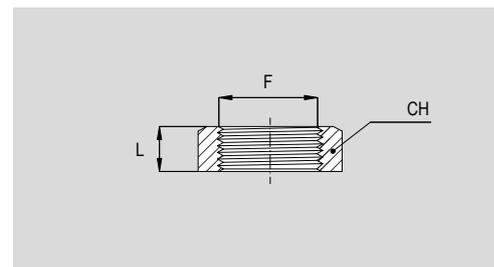


## Dimensions

Code	Item	F (Thread)	L	CH	Weight (g)
026641	AX013 18 18	G1/8"	6	19	-
026642	AX013 14 14	G1/4"	6	22	-
026643	AX013 38 38	G3/8"	7	27	-
026644	AX013 12 12	G1/2"	8	32	-
026645	AX013 34 34	G3/4"	9	36	-
026646	AX013 01 01	G1"	10	46	-
026647	AX013 41 41	G1 1/4"	11	55	-
026648	AX013 21 21	G1 1/2"	12	60	-
026649	AX013 02 02	G2"	13	75	-
026650	AX013 22 22	G2 1/2"	16	95	-
026651	AX013 03 03	G3"	19	105	-

## Main features

Type	Description
AX015	BSPT hose adapter. In AISI 316 Stainless Steel.

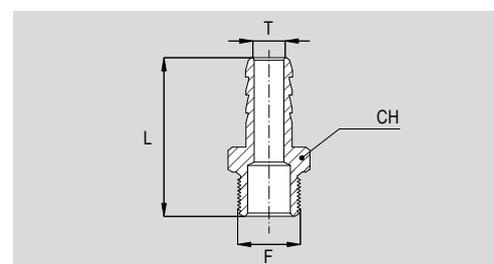

## Dimensions


Code	Item	T (ØTube)	F (Thread)	L	CH	Weight (g)
026711	AX015 07 18	7	R1/8"	30	13	-
026712	AX015 09 14	8	R1/4"	44	15	-
026713	AX015 11 38	10	R3/8"	50	19	-
026714	AX015 15 12	14,5	R1/2"	52	24	-
026715	AX015 21 34	20	R3/4"	60	28	-
026716	AX015 27 01	25	R1"	70	35	-
026717	AX015 34 41	32	R1 1/4"	70	45	-
026718	AX015 40 21	40	R1 1/2"	80	50	-
026719	AX015 52 02	52	R2"	88	62	-

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX032	BSP F/F union. In AISI 316 Stainless Steel.

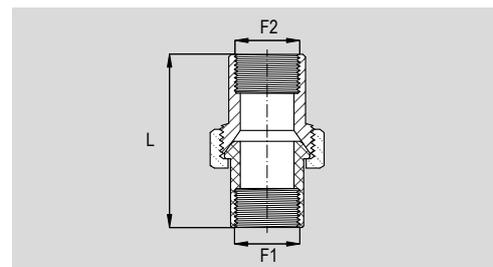


## Dimensions

Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	Weight (g)
026741	AX032 18 18	G1/8"	G1/8"	30	-
026742	AX032 14 14	G1/4"	G1/4"	34	-
026743	AX032 38 38	G3/8"	G3/8"	38	-
026744	AX032 12 12	G1/2"	G1/2"	41	-
026745	AX032 34 34	G3/4"	G3/4"	48	-
026746	AX032 01 01	G1"	G1"	52	-
026747	AX032 41 41	G1 1/4"	G1 1/4"	54	-
026748	AX032 21 21	G1 1/2"	G1 1/2"	59	-
026749	AX032 02 02	G2"	G2"	67	-
026750	AX032 22 22	G2 1/2"	G2 1/2"	78	-
026751	AX032 03 03	G3"	G3"	94	-

## Main features

Type	Description
AX033	M/F union. In AISI 316 Stainless Steel.

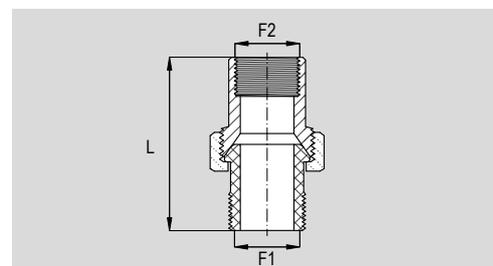

## Dimensions

Code	Item	F1 (Thread 1)	F2 (Thread 2)	CH	Weight (g)
026801	AX033 18 18	R1/8"	G1/8"	42	-
026802	AX033 14 14	R1/4"	G1/4"	42	-
026803	AX033 38 38	R3/8"	G3/8"	49	-
026804	AX033 12 12	R1/2"	G1/2"	56	-
026805	AX033 34 34	R3/4"	G3/4"	63	-
026806	AX033 01 01	R1"	G1"	69	-
026807	AX033 41 41	R1 1/4"	G1 1/4"	74	-
026808	AX033 21 21	R1 1/2"	G1 1/2"	84	-
026809	AX033 02 02	R2"	G2"	102	-


5 - STAINLESS STEEL COMPONENTS

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX034	BSP 45° F/F elbow. In AISI 316 Stainless Steel.

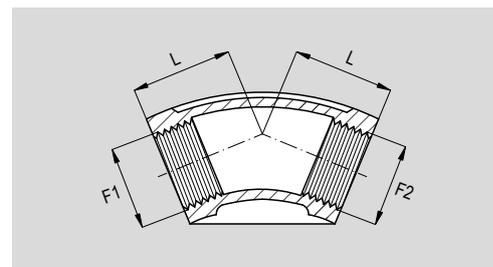


## Dimensions

Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	Weight (g)
026311	AX034 18 18	G1/8"	G1/8"	17	-
026312	AX034 14 14	G1/4"	G1/4"	19	-
026313	AX034 38 38	G3/8"	G3/8"	20	-
026314	AX034 12 12	G1/2"	G1/2"	22	-
026315	AX034 34 34	G3/4"	G3/4"	25	-
026316	AX034 01 01	G1"	G1"	28	-
026317	AX034 41 41	G1 1/4"	G1 1/4"	33	-
026318	AX034 21 21	G1 1/2"	G1 1/2"	36	-
026319	AX034 02 02	G2"	G2"	43	-
026320	AX034 22 22	G2 1/2"	G2 1/2"	50	-
026321	AX034 03 03	G3"	G3"	56	-

## Main features

Type	Description
AX021	F/F elbow. In AISI 316 Stainless Steel.

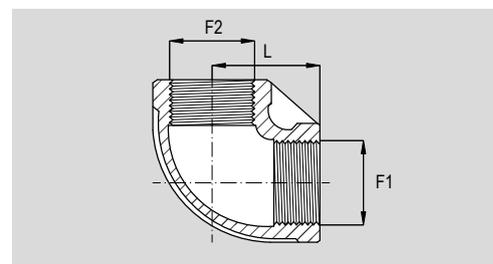

## Dimensions


Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	Weight (g)
026291	AX021 18 18	G1/8"	G1/8"	19	-
026292	AX021 14 14	G1/4"	G1/4"	21	-
026293	AX021 38 38	G3/8"	G3/8"	25	-
026294	AX021 12 12	G1/2"	G1/2"	28	-
026295	AX021 34 34	G3/4"	G3/4"	33	-
026296	AX021 01 01	G1"	G1"	38	-
026297	AX021 41 41	G1 1/4"	G1 1/4"	45	-
026298	AX021 21 21	G1 1/2"	G1 1/2"	50	-
026299	AX021 02 02	G2"	G2"	58	-
026300	AX021 22 22	G2 1/2"	G2 1/2"	75	-
026301	AX021 03 03	G3"	G3"	85	-

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX022	M/F elbow. In AISI 316 Stainless Steel.

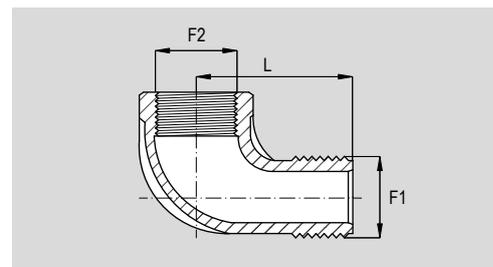


## Dimensions

Code	Item	F1 (Thread 1)	F2 (Thread 2)	L	Weight (g)
026391	AX022 18 18	R1/8"	G1/8"	20	-
026392	AX022 14 14	R1/4"	G1/4"	20	-
026393	AX022 38 38	R3/8"	G3/8"	24	-
026394	AX022 12 12	R1/2"	G1/2"	28	-
026395	AX022 34 34	R3/4"	G3/4"	33	-
026396	AX022 01 01	R1"	G1"	38	-
026397	AX022 41 41	R1 1/4"	G1 1/4"	-	-
026398	AX022 21 21	R1 1/2"	G1 1/2"	-	-
026399	AX022 02 02	R2"	G2"	-	-
026400	AX022 22 22	R2 1/2"	G2 1/2"	-	-
026401	AX022 03 03	R3"	G3"	-	-

## Main features

Type	Description
AX023	F/F/F tee. In AISI 316 Stainless Steel.

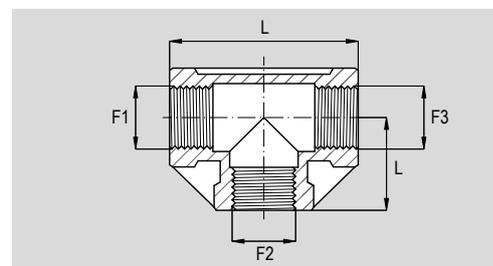

## Dimensions

Code	Item	F1 (Thread 1)	F2 (Thread 2)	F3 (Thread 3)	L	Weight (g)
026421	AX023 18 18	G1/8"	G1/8"	G1/8"	19	-
026422	AX023 14 14	G1/4"	G1/4"	G1/4"	21	-
026423	AX023 38 38	G3/8"	G3/8"	G3/8"	25	-
026424	AX023 12 12	G1/2"	G1/2"	G1/2"	28	-
026425	AX023 34 34	G3/4"	G3/4"	G3/4"	33	-
026426	AX023 01 01	G1"	G1"	G1"	38	-
026427	AX023 41 41	G1 1/4"	G1 1/4"	G1 1/4"	45	-
026428	AX023 21 21	G1 1/2"	G1 1/2"	G1 1/2"	50	-
026429	AX023 02 02	G2"	G2"	G2"	58	-
026430	AX023 22 22	G2 1/2"	G2 1/2"	G2 1/2"	75	-
026431	AX023 03 03	G3"	G3"	G3"	85	-


5 - STAINLESS STEEL COMPONENTS

# Stainless Steel standard fittings

Series AX

## Main features

Type	Description
AX026	F/F/F/F +. In AISI 316 Stainless Steel.

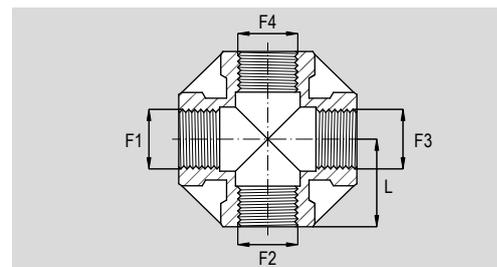

## Dimensions

Code	Item	F1 (Thread 1)	F2 (Thread 2)	F2 (Thread 3)	F2 (Thread 4)	L	Weight (g)
026481	AX026 18 18	G1/8"	G1/8"	G1/8"	G1/8"	20	-
026482	AX026 14 14	G1/4"	G1/4"	G1/4"	G1/4"	24	-
026483	AX026 38 38	G3/8"	G3/8"	G3/8"	G3/8"	24	-
026484	AX026 12 12	G1/2"	G1/2"	G1/2"	G1/2"	28	-
026485	AX026 34 34	G3/4"	G3/4"	G3/4"	G3/4"	33	-
026486	AX026 01 01	G1"	G1"	G1"	G1"	38	-
026487	AX026 41 41	G1 1/4"	G1 1/4"	G1 1/4"	G1 1/4"	45	-
026488	AX026 21 21	G1 1/2"	G1 1/2"	G1 1/2"	G1 1/2"	49	-
026489	AX026 02 02	G2"	G2"	G2"	G2"	57	-